




# OIL ANALYSIS REPORT

Sample Rating Trend

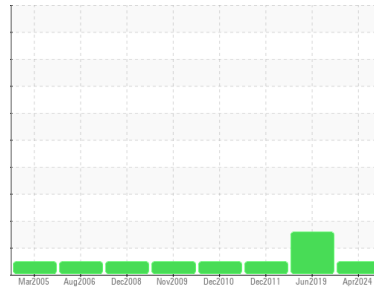

**NORMAL**



Machine Id

**P10881-1**

Component

**Hydraulic System**

Fluid

**AW HYDRAULIC OIL ISO 46 (200 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

### Fluid Condition

The condition of oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0811001</b>	WCI2271186	WCI2207732
Sample Date	Client Info			<b>17 Apr 2024</b>	17 Jun 2019	15 Dec 2011
Machine Age	hrs	Client Info		<b>65555</b>	55400	31778
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>30	<b>&lt;1</b>	2	4
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>2	<b>3</b>	1	2
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>25	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	0	4
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>3</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	25	<b>3</b>	<1	0
Calcium	ppm	ASTM D5185m	200	<b>47</b>	54	56
Phosphorus	ppm	ASTM D5185m	300	<b>326</b>	312	366
Zinc	ppm	ASTM D5185m	370	<b>410</b>	390	433
Sulfur	ppm	ASTM D5185m	2500	<b>1012</b>	3043	1896

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	7	4
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>1198</b>	▲ 54138	16713
Particles >6µm		ASTM D7647	>1300	<b>86</b>	▲ 12044	461
Particles >14µm		ASTM D7647	>160	<b>9</b>	▲ 751	11
Particles >21µm		ASTM D7647	>40	<b>2</b>	▲ 148	9
Particles >38µm		ASTM D7647	>10	<b>0</b>	5	7
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	5
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/14/10</b>	▲ 23/21/17	21/16/11



# OIL ANALYSIS REPORT

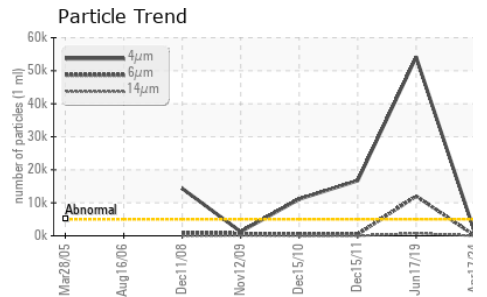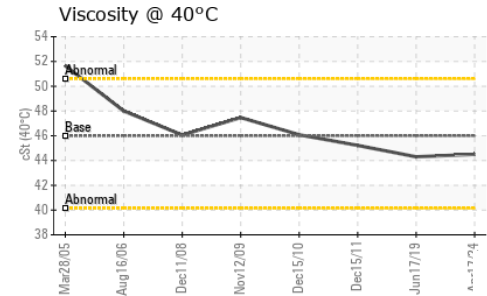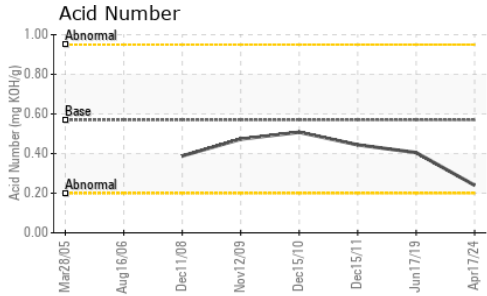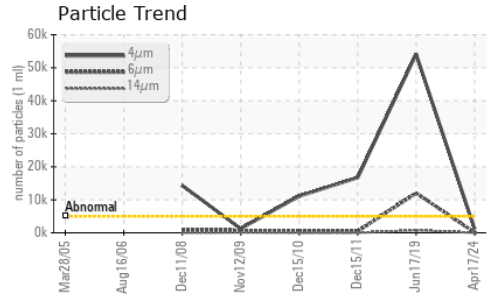


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.24</b>	0.405	0.444






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	<b>44.5</b>	44.3	45.22

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

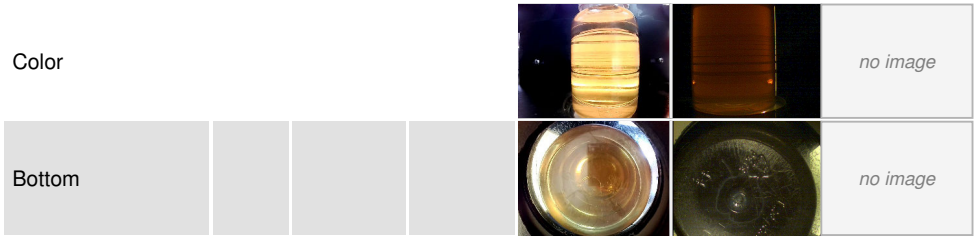

## GRAPHS

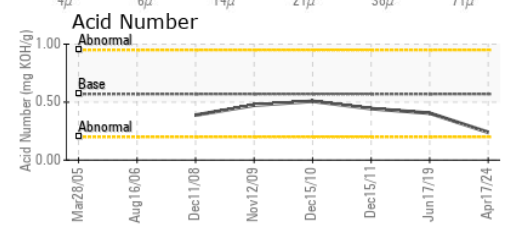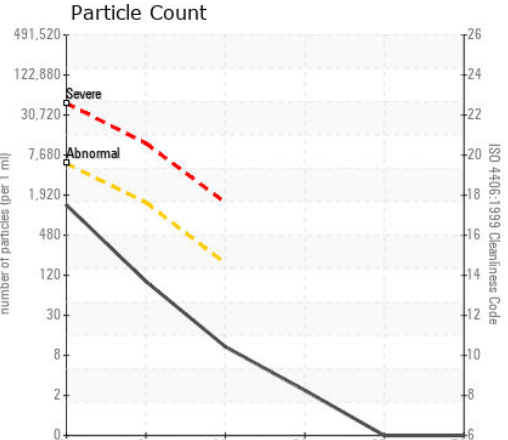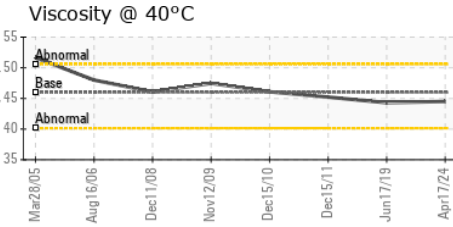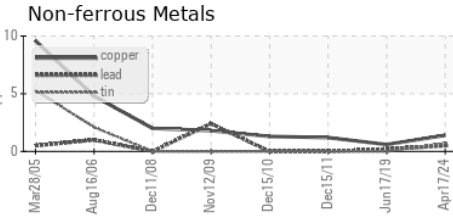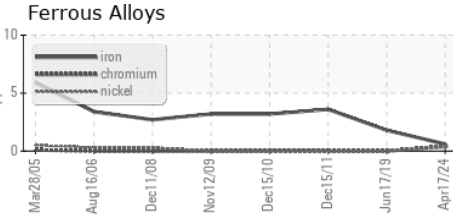

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0811001      **Received** : 22 Apr 2024  
**Lab Number** : 06156892      **Tested** : 23 Apr 2024  
**Unique Number** : 10992315      **Diagnosed** : 24 Apr 2024 - Angela Borella  
**Test Package** : IND 2

**APT NORTH AMERICA**  
 4817 PERSIMMON COURT  
 MONROE, NC  
 US 28110  
 Contact: Thomas Andersson  
 thomas.andersson@aptgroup.com  
 T: (704)220-3230  
 F: (704)292-2906

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)