


### **OIL ANALYSIS REPORT**

Sample Rating Trend

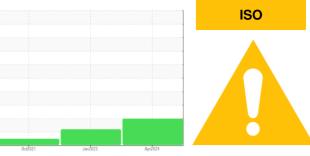

Machine Id

# 3298163 (S/N 1003)

Component Compressor Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013742	KCP52333	KCP39248
Sample Date		Client Info		10 Apr 2024	31 Jan 2023	21 Oct 2021
Machine Age	hrs	Client Info		6294	5964	5711
Dil Age	hrs	Client Info		280	0	3000
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	8	8	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	3	2	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m		1	1	2
Tin	ppm	ASTM D5185m	>10	1	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES	1010-111	method	limit/base		-	
			IIIII/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Vagnesium	ppm	ASTM D5185m		5	7	66
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m	500	370	226	0
Zinc	ppm	ASTM D5185m		117	40	12
Sulfur	ppm	ASTM D5185m		2951	7720	16967
CONTAMINANTS		method	limit/base	current	history1	history2
	ppm	method ASTM D5185m		current <1	history1 0	<mark>history2</mark> <1
Silicon						
Silicon Sodium	ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	<1	0	<1
Silicon Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>25 >20	<1 <1	0 <1	<1 16
Silicon Sodium Potassium Water	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20 >0.05	<1 <1 2	0 <1 <1	<1 16 0
Silicon Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	<1 <1 2 0.003	0 <1 <1 0.007	<1 16 0 0.023 232.7
Silicon Sodium Potassium Water opm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	<1 <1 2 0.003 28	0 <1 <1 0.007 74.1	<1 16 0 0.023 232.7
Silicon Sodium Potassium Water Dopm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05 >500 limit/base	<1 <1 2 0.003 28 current	0 <1 <1 0.007 74.1 history1	<1 16 0 0.023 232.7 history2
Silicon Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	<1 <1 2 0.003 28 current 27639	0 <1 <1 0.007 74.1 history1 10305	<1 16 0 0.023 232.7 history2 1706
Silicon Sodium Potassium Water Dopm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	<1 <1 2 0.003 28 current 27639 ▲ 13125	0 <1 <1 0.007 74.1 history1 10305 ▲ 2865	<1 16 0 0.023 232.7 history2 1706 402
Silicon Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	<1 <1 2 0.003 28 current 27639 ▲ 13125 ▲ 2309	0 <1 <1 0.007 74.1 <u>history1</u> 10305 ▲ 2865 ● 90	<1 16 0 0.023 232.7 history2 1706 402 25
Silicon Sodium Potassium Water <b>FLUID CLEANLIN</b> Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 <ul> <li>&lt;1</li> <li>2</li> <li>0.003</li> <li>28</li> </ul> <ul> <li>27639</li> <li>13125</li> <li>2309</li> <li>812</li> </ul>	0 <1 <1 0.007 74.1 history1 10305 ▲ 2865 90 16	<1 16 0 0.023 232.7 history2 1706 402 25 6
Silicon Sodium Potassium Water opm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	<1 <ul> <li>&lt;1</li> <li>2</li> <li>0.003</li> <li>28</li> </ul> <ul> <li>current</li> <li>27639</li> <li>13125</li> <li>2309</li> <li>812</li> <li>37</li> </ul>	0 <1 <1 0.007 74.1 <u>history1</u> 10305 ▲ 2865 90 16 1	<1 16 0 0.023 232.7 history2 1706 402 25 6 0
Silicon Sodium Potassium Water Dopm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	<1 <ul> <li>&lt;1</li> <li>2</li> <li>0.003</li> <li>28</li> </ul> <ul> <li>current</li> <li>27639</li> <li>13125</li> <li>2309</li> <li>812</li> <li>37</li> <li>1</li> </ul>	0 <1 <1 0.007 74.1 history1 10305 ▲ 2865 90 16 1 1 0	<1 16 0 0.023 232.7 history2 1706 402 25 6 0 0 0

Report Id: SUNSTO [WUSCAR] 06156903 (Generated: 04/24/2024 17:27:21) Rev: 1


Contact/Location: Service Manager - SUNSTO



## **OIL ANALYSIS REPORT**






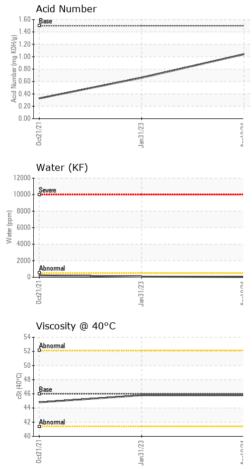

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.8	45.8	44.8
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

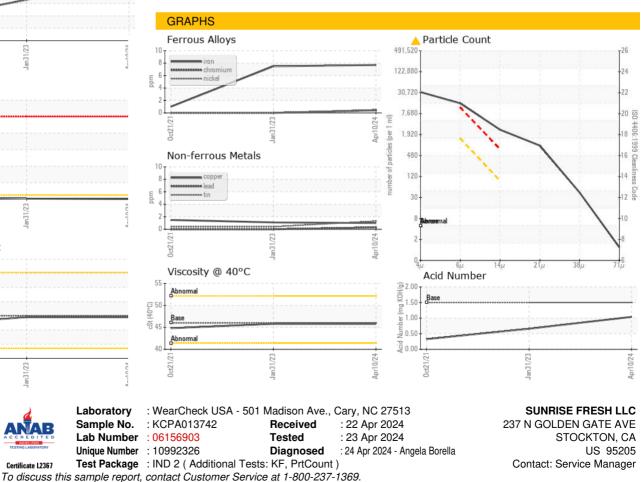

Report Id: SUNSTO [WUSCAR] 06156903 (Generated: 04/24/2024 17:27:22) Rev: 1

Certificate 12367

Contact/Location: Service Manager - SUNSTO

T:

F: