


# **OIL ANALYSIS REPORT**

Sample Rating Trend

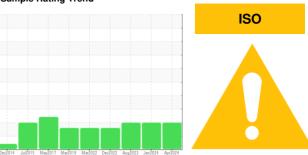

Machine Id

# KAESER SK 15 4990688 (S/N 1604)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Dec2014 Jul	2015 May2017 Mar2019	Mar2022 Dec2022 Aug2023 Jan202	4 Apr2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012521	KCPA006545	KCPA004279
Sample Date		Client Info		17 Apr 2024	04 Jan 2024	18 Aug 2023
Machine Age	hrs	Client Info		64481	62188	59303
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	3	0	4
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	5	8	7
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	11	0	2
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	33	9	39
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	6	4
Zinc	ppm	ASTM D5185m		21	25	14
Sulfur	ppm	ASTM D5185m		19399	17361	20951
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		8	5	9
Potassium	ppm	ASTM D5185m	>20	3	<1	4
Water	%	ASTM D6304	>0.05	0.013	0.014	0.016
ppm Water	ppm	ASTM D6304	>500	136	149	169.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		13071	20164	25905
Particles >6µm		ASTM D7647	>1300	<b>4481</b>	<u>▲</u> 11847	<u>11714</u>
Particles >14µm		ASTM D7647	>80	<u>▲</u> 585	<b>▲</b> 3771	<u>\$\text{2505}\$</u>
Particles >21µm		ASTM D7647	>20	<u> </u>	<b>939</b>	<u>▲</u> 807
Particles >38µm		ASTM D7647	>4	<b>7</b>	<u>19</u>	<b>△</b> 31
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/19/16	<u>22/21/19</u>	<u>22/21/19</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.40	0.33	0.35



## OIL ANALYSIS REPORT

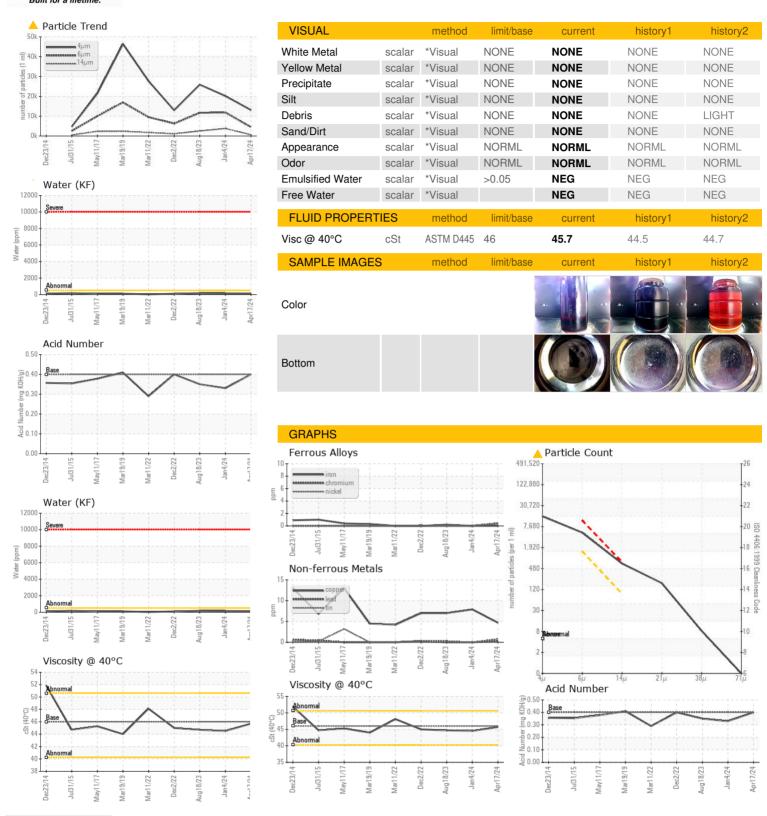





Certificate 12367

Laboratory Sample No.

: KCPA012521 : 06156924

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Lab Number Unique Number: 10992347

Received : 22 Apr 2024 **Tested** : 23 Apr 2024 Diagnosed : 24 Apr 2024 - Angela Borella

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ASSOCIATED FEED & SUPPLY** 

**5213 W MAIN ST** TURLOCK, CA US 95380-9413 Contact: J. SARTIN

jsartin@associatedfeed.com T:

F: