




OIL ANALYSIS REPORT

Sample Rating Trend

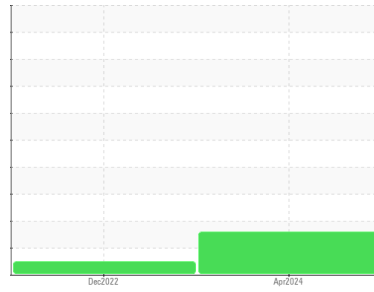

ISO



Machine Id

KAESER SK20 8485614 (S/N 1805)

Component

Compressor

Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA017145	KCP46105	---
Sample Date	Client Info		10 Apr 2024	28 Dec 2022	---
Machine Age	hrs	Client Info	8864	3397	---
Oil Age	hrs	Client Info	3163	0	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			ABNORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	1	---
Chromium	ppm	ASTM D5185m >10	<1	0	---
Nickel	ppm	ASTM D5185m >3	<1	0	---
Titanium	ppm	ASTM D5185m >3	<1	0	---
Silver	ppm	ASTM D5185m >2	<1	0	---
Aluminum	ppm	ASTM D5185m >10	3	<1	---
Lead	ppm	ASTM D5185m >10	1	0	---
Copper	ppm	ASTM D5185m >50	7	4	---
Tin	ppm	ASTM D5185m >10	<1	<1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	---
Barium	ppm	ASTM D5185m 90	13	31	---
Molybdenum	ppm	ASTM D5185m 0	<1	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 100	70	71	---
Calcium	ppm	ASTM D5185m 0	2	13	---
Phosphorus	ppm	ASTM D5185m 0	0	5	---
Zinc	ppm	ASTM D5185m 0	2	2	---
Sulfur	ppm	ASTM D5185m 23500	21367	20227	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	<1	---
Sodium	ppm	ASTM D5185m	50	33	---
Potassium	ppm	ASTM D5185m >20	12	14	---
Water	%	ASTM D6304 >0.05	0.027	0.021	---
ppm Water	ppm	ASTM D6304 >500	276	211.3	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		28974	3926	---
Particles >6µm	ASTM D7647	>1300	▲ 7294	743	---
Particles >14µm	ASTM D7647	>80	▲ 289	36	---
Particles >21µm	ASTM D7647	>20	▲ 54	8	---
Particles >38µm	ASTM D7647	>4	1	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 22/20/15	19/17/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.34	0.27	---


OIL ANALYSIS REPORT

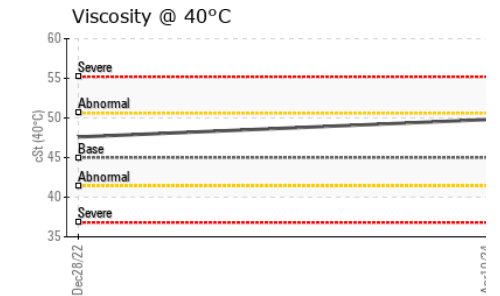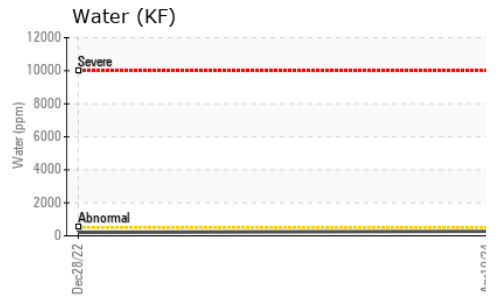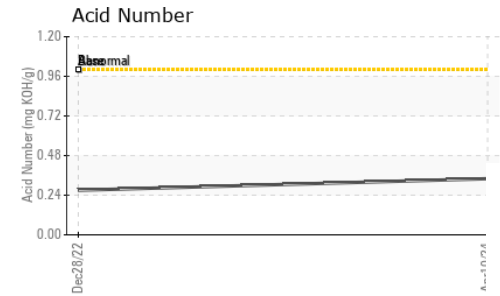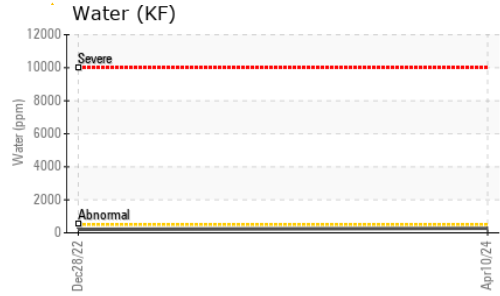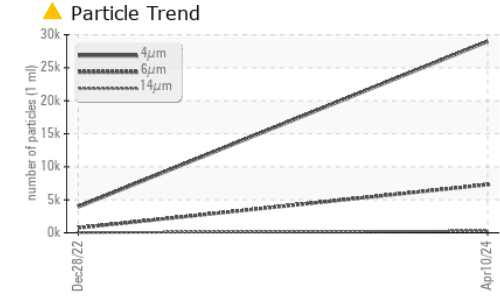





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.8	47.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

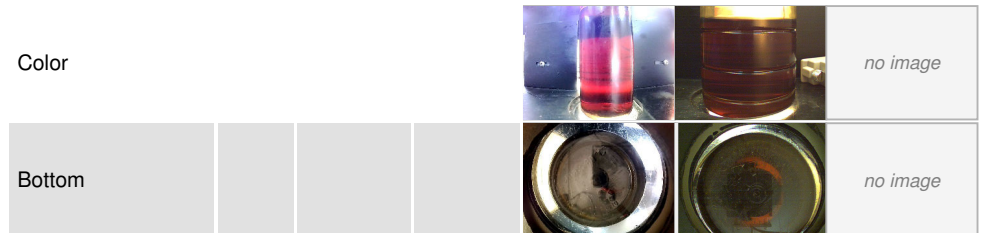

GRAPHS

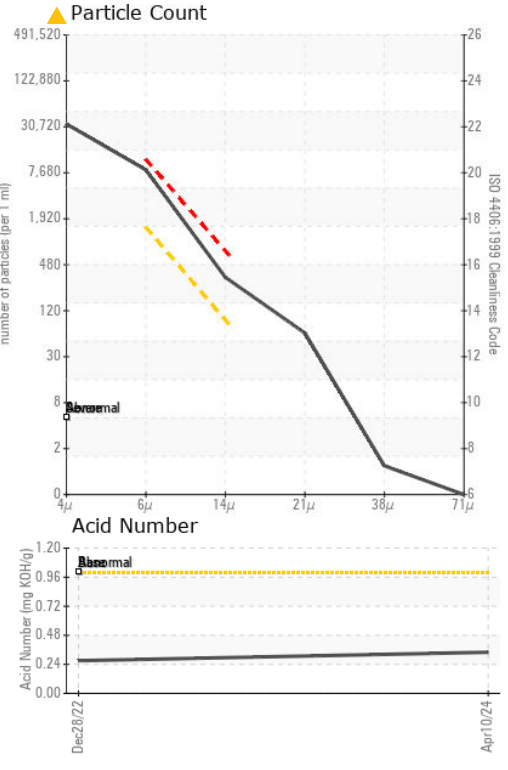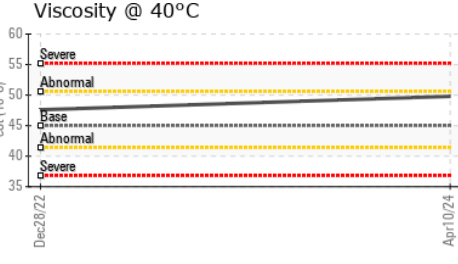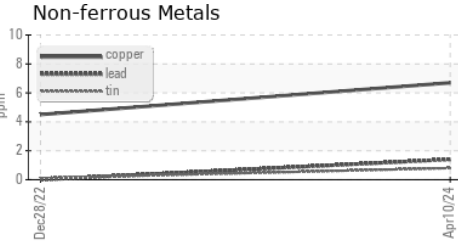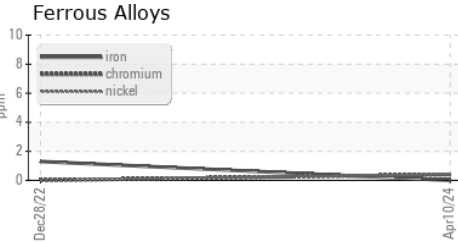

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA017145 **Received** : 22 Apr 2024
Lab Number : 06156929 **Tested** : 24 Apr 2024
Unique Number : 10992352 **Diagnosed** : 24 Apr 2024 - Angela Borella
Test Package : IND 2 (Additional Tests: KF, PrtCount)

STANDARD OFFSET
 500 E OREGON RD
 LANCASTER, PA
 US 17543
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)