


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7367305 (S/N 1239)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA013724	KCP39140	
Sample Date		Client Info		16 Apr 2024	06 Oct 2021	
Machine Age	hrs	Client Info		14775	5098	
Dil Age	hrs	Client Info		1152	0	
Dil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	<1	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>2	<1	<1	
Aluminum	ppm	ASTM D5185m	>10	3	<1	
			>10	ء <1	0	
Lead	ppm	ASTM D5185m				
Copper	ppm		>50	10	12	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Antimony	ppm	ASTM D5185m			<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	6	
Barium	ppm	ASTM D5185m	90	22	0	
Volybdenum	ppm	ASTM D5185m	0	<1	0	
Manganese	ppm	ASTM D5185m		<1	0	
Vagnesium	ppm	ASTM D5185m	100	32	13	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	3	
Zinc	ppm	ASTM D5185m	0	14	3	
Sulfur	ppm		23500	20220	16097	
CONTAMINANTS		method	limit/base	current	history1	history2
		method	iiiiii/base	Current	Thistory I	Thistory2
Silicon		AOTH DELOF	05	•	0	
	ppm	ASTM D5185m	>25	3	0	
Sodium	ppm	ASTM D5185m		3	3	
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>20	3 7	3 5	
Sodium Potassium Water	ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	3 7 0.013	3 5 0.009	
Sodium Potassium Water	ppm ppm	ASTM D5185m ASTM D5185m	>20	3 7	3 5	
Sodium Potassium Water	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304	>20 >0.05	3 7 0.013	3 5 0.009	
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>20 >0.05 >500	3 7 0.013 138	3 5 0.009 94.7	
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>20 >0.05 >500 limit/base	3 7 0.013 138 current	3 5 0.009 94.7 history1	 history2
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>20 >0.05 >500 limit/base	3 7 0.013 138 current 20554	3 5 0.009 94.7 history1 11486	 history2
Sodium Potassium Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	3 7 0.013 138 <u>current</u> 20554 ▲ 7581	3 5 0.009 94.7 history1 11486 ▲ 5623	 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80	3 7 0.013 138 <u>current</u> 20554 ▲ 7581 ▲ 1050	3 5 0.009 94.7 history1 11486 ▲ 5623 ▲ 692	 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	3 7 0.013 138 current 20554 ▲ 7581 ▲ 1050 382	3 5 0.009 94.7 history1 11486 ▲ 5623 ▲ 692 ▲ 109	 history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4	3 7 0.013 138 <u>current</u> 20554 ▲ 7581 ▲ 1050 382 ▲ 28	3 5 0.009 94.7 <u>history1</u> 11486 ▲ 5623 ▲ 692 ▲ 109 ▲ 5	 history2
Sodium Potassium Water opm Water	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	3 7 0.013 138 <u>current</u> 20554 ▲ 7581 ▲ 1050 382 ▲ 28 0	3 5 0.009 94.7 11486 ▲ 5623 ▲ 692 ▲ 109 ▲ 5 0	 history2


Report Id: ALGOAKCA [WUSCAR] 06156936 (Generated: 04/24/2024 17:39:51) Rev: 1


Contact/Location: Service Manager - ALGOAKCA




OIL ANALYSIS REPORT



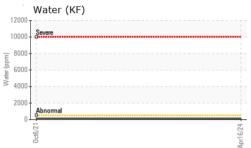

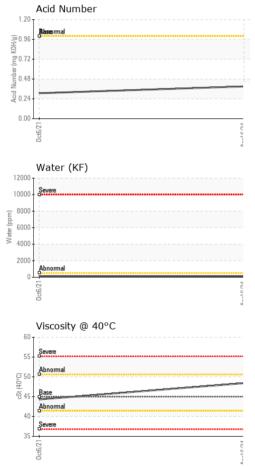

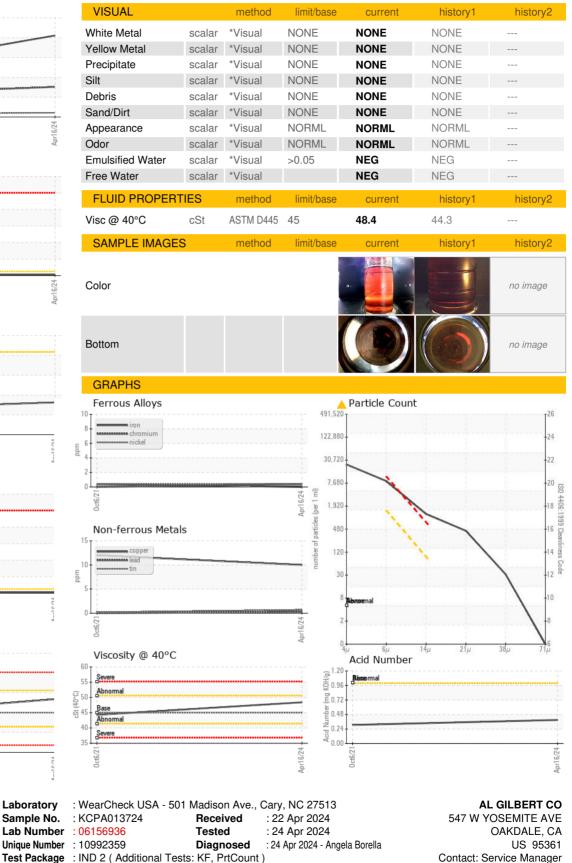

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Laboratory

Contact/Location: Service Manager - ALGOAKCA Page 2 of 2

T:

F: