




# OIL ANALYSIS REPORT

## Sample Rating Trend

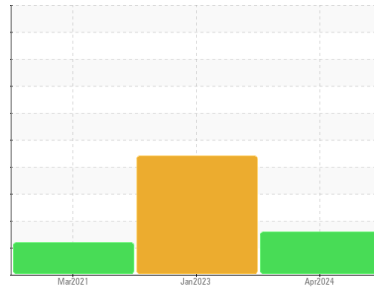

ISO



Machine Id  
**6857423 (S/N 1071)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA013576</b>	KCP53121	KCP34656
Sample Date	Client Info			<b>16 Apr 2024</b>	20 Jan 2023	24 Mar 2021
Machine Age	hrs	Client Info		<b>12810</b>	0	3848
Oil Age	hrs	Client Info		<b>0</b>	0	3848
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>ATTENTION</b>	ABNORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	<b>3</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<1	<1	0
Copper	ppm	ASTM D5185m	>50	<b>8</b>	12	5
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	100	<b>19</b>	12	31
Calcium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m	0	<b>0</b>	8	1
Zinc	ppm	ASTM D5185m	0	<b>94</b>	69	50
Sulfur	ppm	ASTM D5185m	23500	<b>19901</b>	19947	15988

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	0
Sodium	ppm	ASTM D5185m		<b>3</b>	2	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	2
Water	%	ASTM D6304	>0.05	<b>0.012</b>	▲ 0.513	0.012
ppm Water	ppm	ASTM D6304	>500	<b>127</b>	▲ 5130	125.7

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>5033</b>	---	11609
Particles >6µm		ASTM D7647	>1300	● <b>1412</b>	---	● 2240
Particles >14µm		ASTM D7647	>80	● <b>120</b>	---	● 132
Particles >21µm		ASTM D7647	>20	● <b>30</b>	---	● 30
Particles >38µm		ASTM D7647	>4	<b>2</b>	---	2
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	● <b>20/18/14</b>	---	● 18/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.44</b>	0.39	0.370


# OIL ANALYSIS REPORT

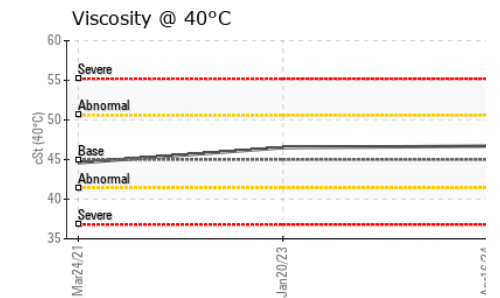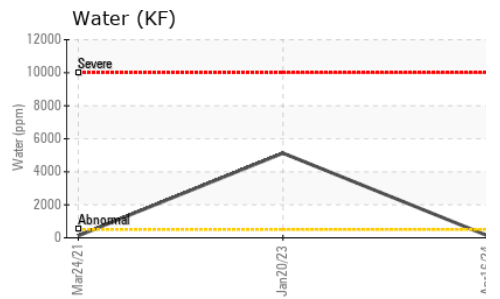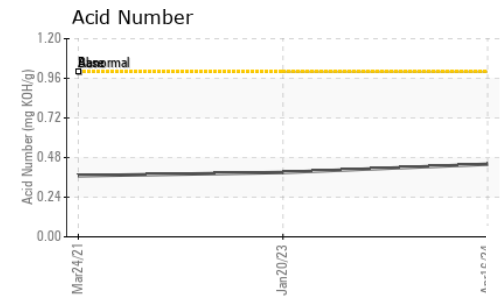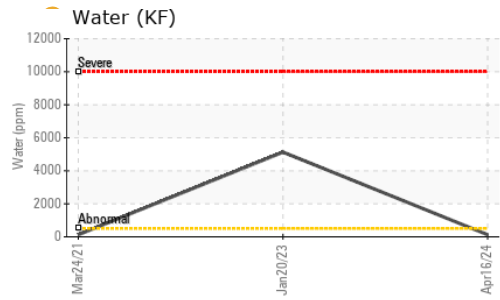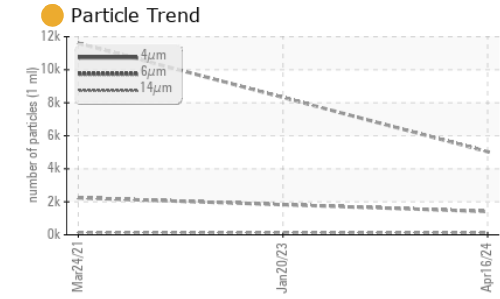





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	● HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	● >10%

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.7	46.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

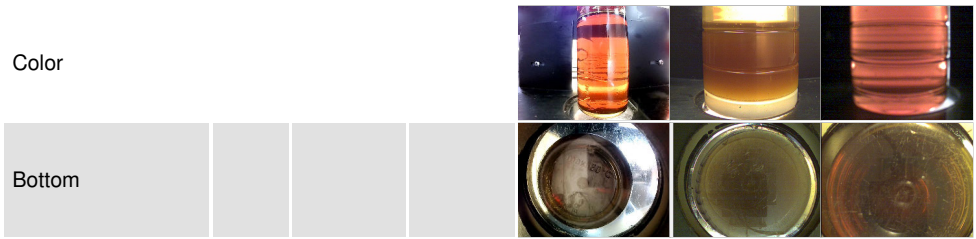

## GRAPHS

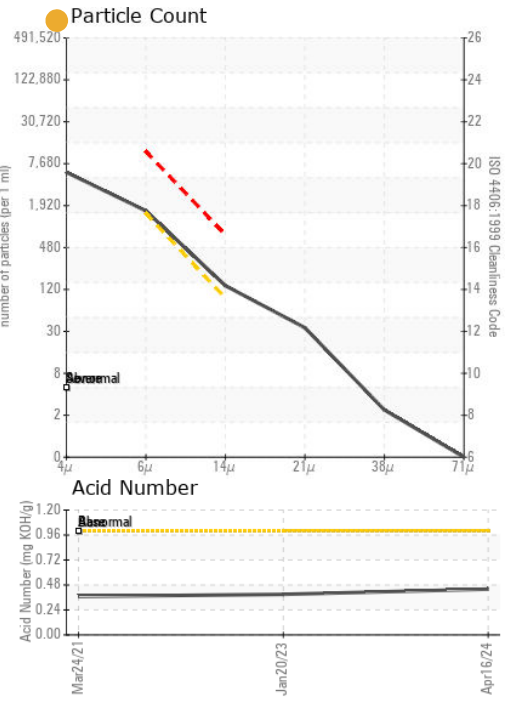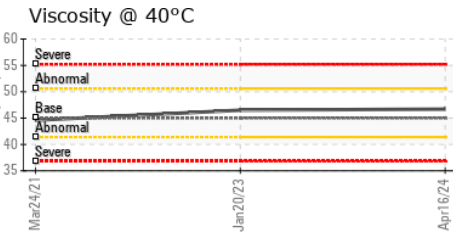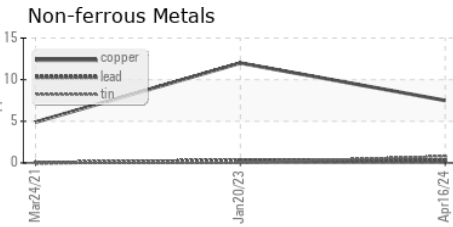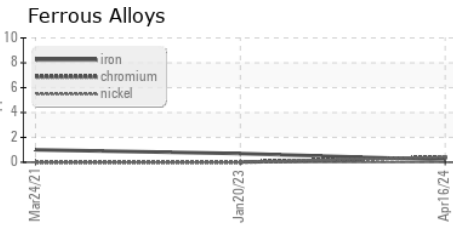

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA013576 **Received** : 22 Apr 2024  
**Lab Number** : 06156950 **Tested** : 23 Apr 2024  
**Unique Number** : 10992373 **Diagnosed** : 24 Apr 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**NEODORA**  
 1545 BERGER DR  
 SAN JOSE, CA  
 US 95112  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)