


OIL ANALYSIS REPORT

Sample Rating Trend

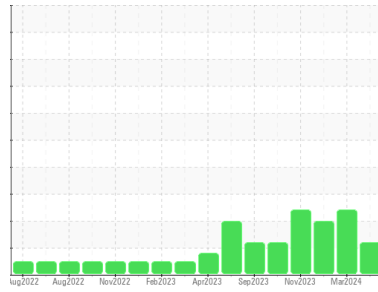

Area
Thermoforming
 Machine Id
Line 3 C Extruder (S/N X8257)
 Component
Bevel Helical Gearbox
 Fluid
{not provided} (18 GAL)

DIAGNOSIS

- Recommendation**
 No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.
- Fluid Condition**
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO50002279	TO50002231	TO50002186
Sample Date	Client Info	17 Apr 2024	29 Mar 2024	29 Feb 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	Not Chngd	Filtered	Not Chngd
Sample Status		ABNORMAL	ATTENTION	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
PQ	ASTM D8184	12	13	14	
Iron	ppm	ASTM D5185m >150	0	8	16
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	9	2	2
Lead	ppm	ASTM D5185m >100	<1	<1	1
Copper	ppm	ASTM D5185m >50	<1	3	8
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	6	0	0
Molybdenum	ppm	ASTM D5185m	<1	0	0
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	11	<1	<1
Calcium	ppm	ASTM D5185m	2	4	0
Phosphorus	ppm	ASTM D5185m	5	638	904
Zinc	ppm	ASTM D5185m	2	14	19
Sulfur	ppm	ASTM D5185m	0	738	1091

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >50	2	46	21
Sodium	ppm	ASTM D5185m	27	<1	3
Potassium	ppm	ASTM D5185m >20	7	<1	<1
Water	%	ASTM D6304 >0.1	0.00	0.003	0.011
ppm Water	ppm	ASTM D6304 >1000	0	30	110






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >1300	▲ 4651	● 1533	▲ 68153
Particles >6µm	ASTM D7647 >320	▲ 1007	● 536	▲ 16565
Particles >14µm	ASTM D7647 >80	72	● 110	▲ 300
Particles >21µm	ASTM D7647 >20	28	● 57	▲ 39
Particles >38µm	ASTM D7647 >4	2	● 10	2
Particles >71µm	ASTM D7647 >3	0	● 1	0
Oil Cleanliness	ISO 4406 (c) >17/15/13	▲ 19/17/13	● 18/16/14	▲ 23/21/15

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.79	0.77	0.78

OIL ANALYSIS REPORT

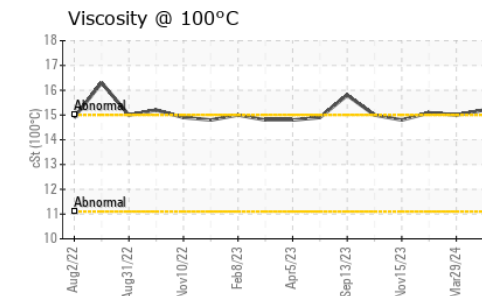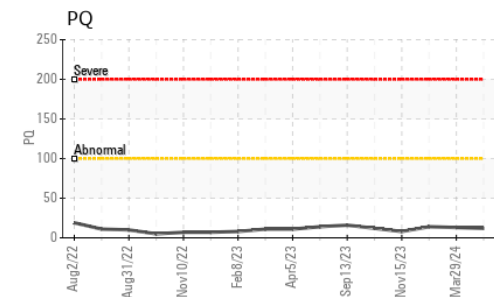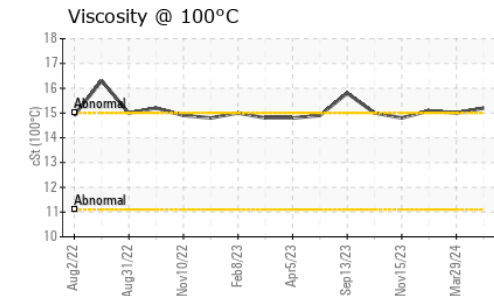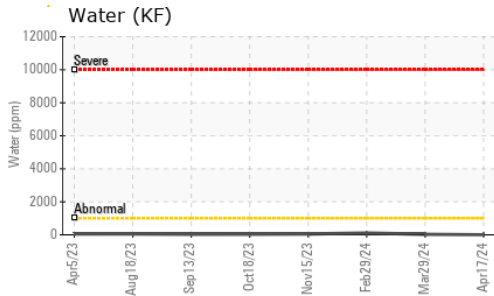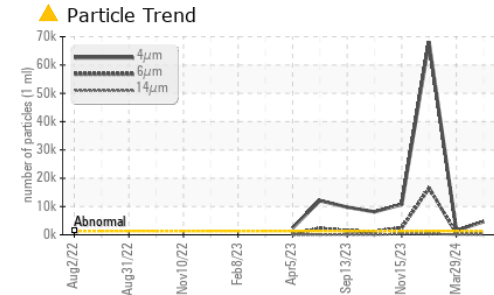

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	147	146	145
Visc @ 100°C	cSt	ASTM D445	15.2	15.0	15.09
Viscosity Index (VI)	Scale	ASTM D2270	104	102	104

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS

Ferrous Alloys

Non-ferrous Metals

Particle Count

Viscosity @ 40°C

Acid Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50002279
Lab Number : 06156961
Unique Number : 10992384
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)