

Area
Thermoforming
 Machine Id
Line 3 B Extruder (S/N X8951)
 Component
Bevel Helical Gearbox
 Fluid
SUMMIT UNIPAR FG-150 (8 GAL)

DIAGNOSIS

- Recommendation**
 No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.
- Fluid Condition**
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION


method	limit/base	current	history1	history2
Sample Number	Client Info	TO50002195	TO50002232	TO50002202
Sample Date	Client Info	17 Apr 2024	29 Mar 2024	29 Feb 2024
Machine Age	hrs	1000	1000	1000
Oil Age	hrs	0	1000	1000
Oil Changed	Client Info	Not Chngd	Filtered	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	ATTENTION

WEAR METALS


method	limit/base	current	history1	history2	
PQ	ASTM D8184	9	14	13	
Iron	ppm	ASTM D5185m >150	4	4	2
Chromium	ppm	ASTM D5185m >10	<1	<1	<1
Nickel	ppm	ASTM D5185m >10	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	3	2	2
Lead	ppm	ASTM D5185m >100	<1	0	0
Copper	ppm	ASTM D5185m >50	2	1	2
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<		

OIL ANALYSIS REPORT


▲ Particle Trend

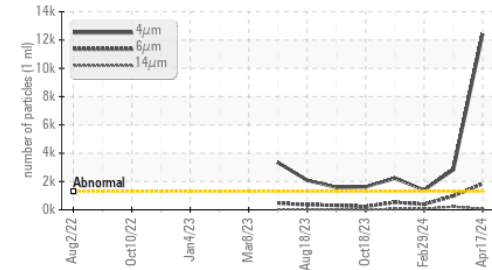


Water (KF)

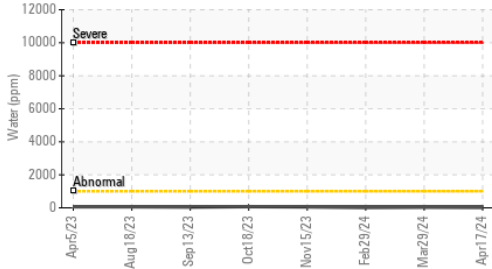


Viscosity @ 100°C

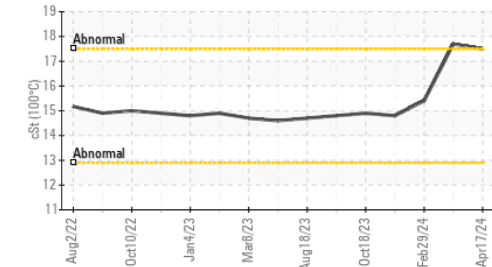

PQ

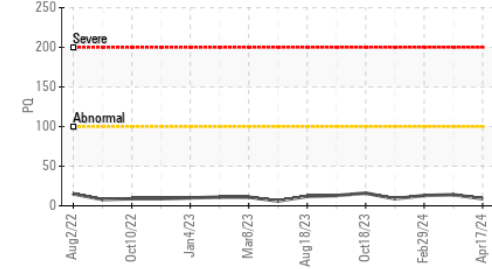

Viscosity @ 100°C

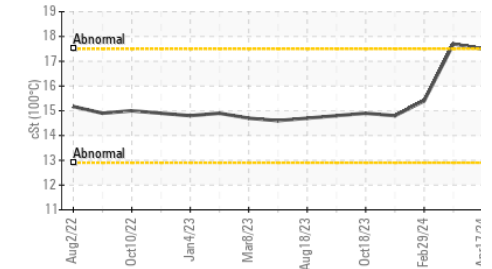

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	174	177	149
Visc @ 100°C	cSt	ASTM D445	17.5	17.7	15.4
Viscosity Index (VI)	Scale	ASTM D2270	109	108	105

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

Bottom




GRAPHS


Ferrous Alloys

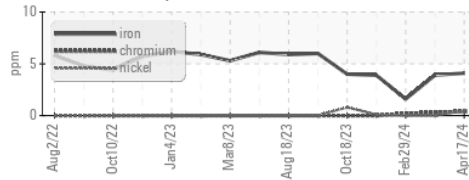


Non-ferrous Metals

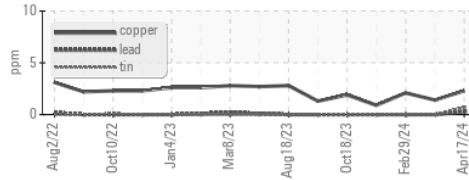


Viscosity @ 40°C

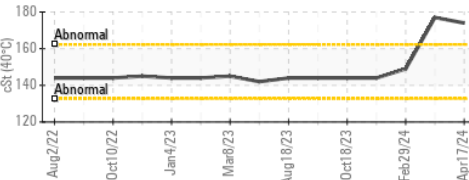

▲ Particle Count

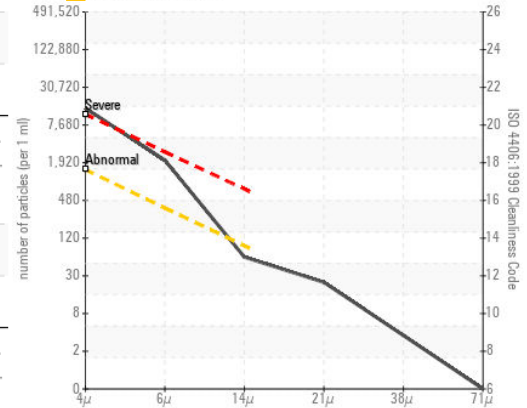

Acid Number

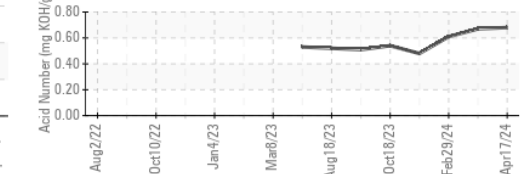

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50002195 **Received** : 22 Apr 2024
Lab Number : 06156964 **Tested** : 23 Apr 2024
Unique Number : 10992387 **Diagnosed** : 25 Apr 2024 - Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, PQ, PrtCount, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DART CONTAINER CORPORATION
 4444 W LEADBETTER DR
 DALLAS, TX
 US 75236
 Contact: YON PALOMINO
 yon.palomino@dart.biz
 T: (214)775-5673
 F: