




# OIL ANALYSIS REPORT

Sample Rating Trend

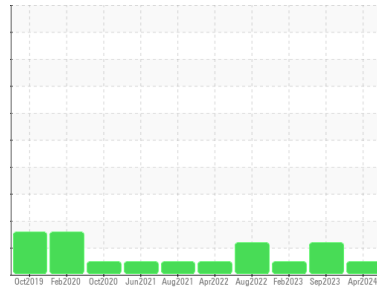

**NORMAL**



Machine Id  
**050-0026**

Component  
**Diesel Engine**

Fluid  
**SCHAEFFER SUPREME 7000 (1 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0903848</b>	WC0815122	WC0750628
Sample Date	Client Info		<b>17 Apr 2024</b>	06 Sep 2023	27 Feb 2023
Machine Age	hrs	Client Info	<b>1808</b>	1808	1511
Oil Age	hrs	Client Info	<b>1808</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>81</b>	▲ 151	78
Chromium	ppm	ASTM D5185m >20	<b>7</b>	9	7
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>8</b>	12	11
Lead	ppm	ASTM D5185m >40	<b>2</b>	5	2
Copper	ppm	ASTM D5185m >330	<b>1</b>	3	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>74</b>	75	68
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Molybdenum	ppm	ASTM D5185m 50	<b>81</b>	88	90
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 1000	<b>16</b>	24	14
Calcium	ppm	ASTM D5185m 1400	<b>2334</b>	2777	2654
Phosphorus	ppm	ASTM D5185m 985	<b>1056</b>	1173	1072
Zinc	ppm	ASTM D5185m 1060	<b>1379</b>	1574	1351
Sulfur	ppm	ASTM D5185m 4000	<b>5670</b>	5897	4420

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>13</b>	20	14
Sodium	ppm	ASTM D5185m	<b>3</b>	5	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	3

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	1.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>13.3</b>	16.0	14.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.8</b>	32.1	26.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.3</b>	32.2	25.8
Base Number (BN)	mg KOH/g	ASTM D2896 10	<b>6.8</b>	6.7	6.8







# OIL ANALYSIS REPORT

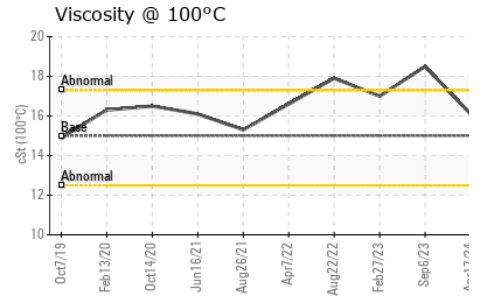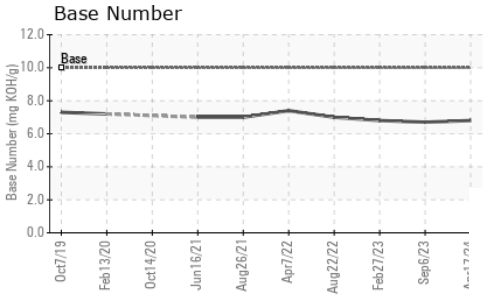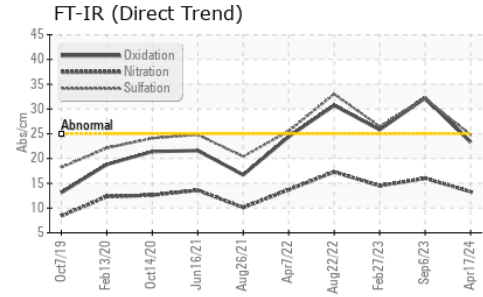

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 15	16.1	▲ 18.5	17.0

### GRAPHS

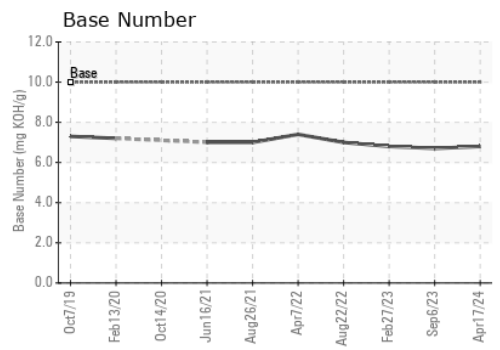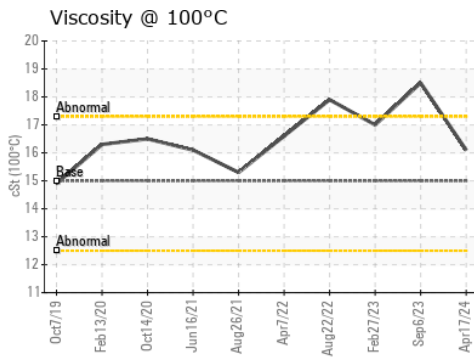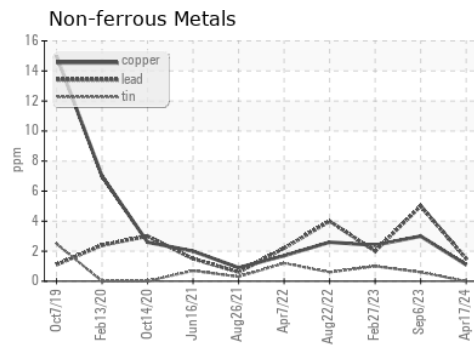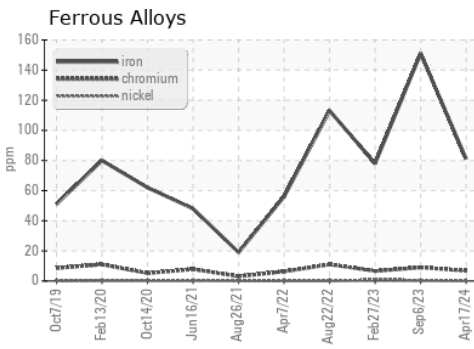

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0903848      **Received** : 23 Apr 2024  
**Lab Number** : 06157498      **Tested** : 24 Apr 2024  
**Unique Number** : 10992921      **Diagnosed** : 24 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHIMMICK CONSTRUCTION**  
 5535 TRAILHEAD DRIVE  
 CHATTANOOGA, TN  
 US 37415  
 Contact: DANIEL LISELLA  
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)