


# **OIL ANALYSIS REPORT**





6523
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

### DIAGNOSIS

Machine Id

#### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION         method         limit/base         current         history1         history2           Sample Number         Client Info         WC0926828             Sample Date         Client Info         15 Apr 2024            Machine Age         hrs         Client Info         0            Oil Changed         Client Info         Changed            Sample Status         MC Method         ABNORMAL            CONTAMINATION         method         limit/base         current         history1         history2           Fuel         WC Method         >0.2         NEG              Water         WC Method         >0.2         NEG              Glycol         WC Method         NEG               Iron         ppm         ASTM D5185m         >10.0          129              Iron         ppm         ASTM D5185m         >4         0 <t< th=""><th></th><th></th><th></th><th></th><th>Apr2024</th><th></th><th></th></t<>					Apr2024		
Sample Number   Client Info   WC0926828	CAMPLE INICODA	MATION	mothod	limit/bass	ourront.	hiotorya	history
Sample Date		MATION		IIIIII/base			
Machine Age         hrs         Client Info         8146							
Oil Age         hrs         Client Info         0             Oil Changed Sample Status         Client Info         Changed             Sample Status         Method         Social Control         Control         ABNORMAL            CONTAMINATION         method         limit/base         current         history1         history2           Fuel         WC Method         >5         <1.0             Water         WC Method         >5         <1.0            Wear         WC Method         NEG             WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185m         >100         129             Uron         ppm         ASTM D5185m         >10              Chromium         ppm         ASTM D5185m         >20         <1             Irin         ppm         ASTM D5185m         >20         2             Copper         ppm         ASTM D5185m </td <td>•</td> <td>la u a</td> <td></td> <td></td> <td></td> <td></td> <td></td>	•	la u a					
Contamed   Client Info   Changed   Client Info   ABNORMAL   Contament   Con							
ABNORMAL	-	IIIS			•		
CONTAMINATION			Ciletit IIIIO				
Fuel	·						
Water Glycol         WC Method         >0.2         NEG             WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185m         >10.0         129             Chromium         ppm         ASTM D5185m         >2.0         <1		V				history1	history2
WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185m         >100         129             Chromium         ppm         ASTM D5185m         >20         <1							
WEAR METALS         method         limit/base         current         history1         history2           Iron         ppm         ASTM D5185m         >100         ▲ 129             Chromium         ppm         ASTM D5185m         >20         <1				>0.2			
Iron	Glycol		WC Method		NEG		
Chromium	WEAR METALS		method	limit/base	current	history1	history2
Nickel		ppm		>100	<b>129</b>		
Description	Chromium	ppm	ASTM D5185m	>20	<1		
Silver	Nickel	ppm		>4	_		
Aluminum		ppm			-		
Lead		• •					
Copper         ppm         ASTM D5185m         >330         1             Tin         ppm         ASTM D5185m         >15         0             Vanadium         ppm         ASTM D5185m         <1							
Tin							
Vanadium         ppm         ASTM D5185m         <1             Cadmium         ppm         ASTM D5185m         0             ADDITIVES         method         limit/base         current         history1         history2           Boron         ppm         ASTM D5185m         30             Barium         ppm         ASTM D5185m         <1             Molybdenum         ppm         ASTM D5185m         75             Manganese         ppm         ASTM D5185m         368             Magnesium         ppm         ASTM D5185m         368             Calcium         ppm         ASTM D5185m         953             Phosphorus         ppm         ASTM D5185m         953             Zinc         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >20         2 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
ADDITIVES		• •		>15			
ADDITIVES							
Boron		ppm			U		
Barium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum         ppm         ASTM D5185m         75             Manganese         ppm         ASTM D5185m         368             Magnesium         ppm         ASTM D5185m         1685             Calcium         ppm         ASTM D5185m         953             Phosphorus         ppm         ASTM D5185m         1218             Zinc         ppm         ASTM D5185m         3653             Sulfur         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         >20         2             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %	Boron	ppm	ASTM D5185m				
Manganese         ppm         ASTM D5185m         <1             Magnesium         ppm         ASTM D5185m         368             Calcium         ppm         ASTM D5185m         1685             Phosphorus         ppm         ASTM D5185m         953             Zinc         ppm         ASTM D5185m         3653             Sulfur         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         >20         2             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Sulfation		ppm	ASTM D5185m				
Magnesium         ppm         ASTM D5185m         368             Calcium         ppm         ASTM D5185m         1685             Phosphorus         ppm         ASTM D5185m         953             Zinc         ppm         ASTM D5185m         1218             Sulfur         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         1             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADA	-				_		
Calcium         ppm         ASTM D5185m         1685             Phosphorus         ppm         ASTM D5185m         953             Zinc         ppm         ASTM D5185m         1218             Sulfur         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         1             Potassium         ppm         ASTM D5185m         >20         2            INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Nitration         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation<	•						
Phosphorus         ppm         ASTM D5185m         953             Zinc         ppm         ASTM D5185m         1218             Sulfur         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         1             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Sulfation         Abs/.1mm         *ASTM D7624         >20         13.1             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5          -	-						
Table   Tabl							
Sulfur         ppm         ASTM D5185m         3653             CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         1             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Nitration         Abs/cm         *ASTM D7624         >20         13.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5		• •					
CONTAMINANTS         method         limit/base         current         history1         history2           Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         1             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Nitration         Abs/cm         *ASTM D7624         >20         13.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5	-						
Silicon         ppm         ASTM D5185m         >25         8             Sodium         ppm         ASTM D5185m         1             Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Nitration         Abs/cm         *ASTM D7624         >20         13.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5					3653		
Sodium	CONTAMINANTS		method	limit/base	current	history1	history2
Potassium         ppm         ASTM D5185m         >20         2             INFRA-RED         method         limit/base         current         history1         history2           Soot %         %         *ASTM D7844         >3         1.9             Nitration         Abs/cm         *ASTM D7624         >20         13.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5		• •		>25			
INFRA-RED							
Soot %         *ASTM D7844         >3         1.9             Nitration         Abs/cm         *ASTM D7624         >20         13.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5	Potassium	ppm	ASTM D5185m	>20	2		
Nitration         Abs/cm         *ASTM D7624         >20         13.1             Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5	INFRA-RED		method	limit/base	current	history1	history2
Sulfation         Abs/.1mm         *ASTM D7415         >30         30.0             FLUID DEGRADATION         method         limit/base         current         history1         history2           Oxidation         Abs/.1mm         *ASTM D7414         >25         27.5	Soot %	%	*ASTM D7844	>3	1.9		
FLUID DEGRADATION     method     limit/base     current     history1     history2       Oxidation     Abs/.1mm     *ASTM D7414     >25     27.5	Nitration	Abs/cm	*ASTM D7624	>20	13.1		
Oxidation	Sulfation	Abs/.1mm	*ASTM D7415	>30	30.0		
	FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	Oxidation	Abs/.1mm	*ASTM D7414	>25	27.5		
		mg KOH/g					



## **OIL ANALYSIS REPORT**

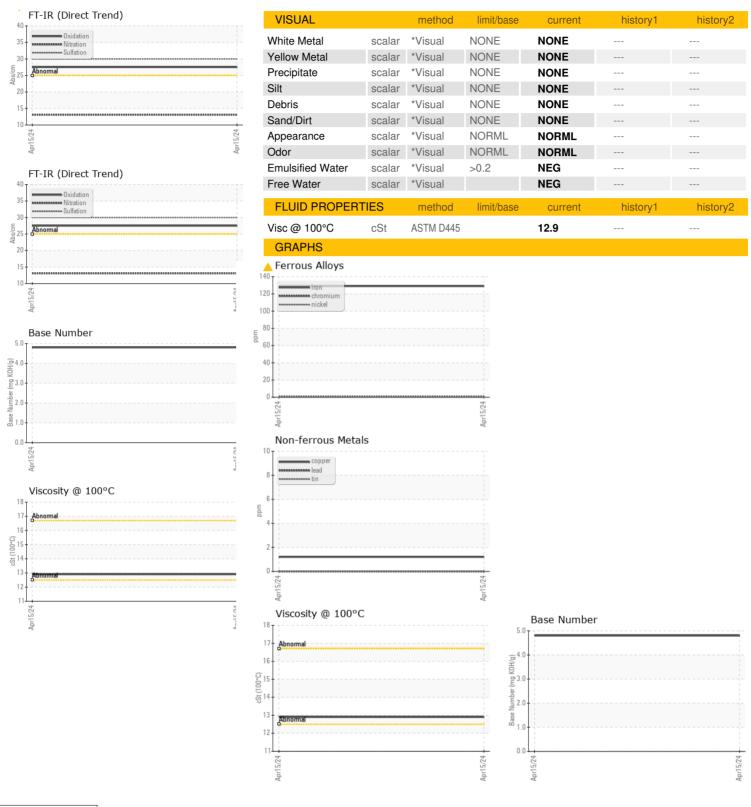





Certificate 12367

Laboratory Sample No. Lab Number : 06157515 Unique Number : 10992938 Test Package : FLEET

: WC0926828

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 23 Apr 2024 Tested : 24 Apr 2024

: 25 Apr 2024 - Angela Borella Diagnosed

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**FLORIDA POWER & LIGHT** 

2457 PORT WEST BLVD RIVIERA BEACH, FL US 33407

Contact: ALEX MECKEL alex.meckel@fpl.com

T: F: