


# **OIL ANALYSIS REPORT**

RP-101 [10024147044]

**B57006** 

Component Gearbox

PETRO CANADA SYNDURO SHB ISO 460 (--- QTS)





## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

## Fluid Condition

Viscosity of sample indicates oil is within ISO 150 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0923583	WC0907984	WC0923592
Sample Date		Client Info		22 Apr 2024	21 Apr 2024	20 Apr 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	1	<1	3
Chromium	ppm	ASTM D5185m	>15	<1	<1	<1
Nickel	ppm	ASTM D5185m	>15	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	2
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	<1	<1	<1
Tin	ppm	ASTM D5185m	>25	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
Cadmium	ppm	ASTM D5185m		<1	<1	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	5.0	0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	5.0	<1	0	<1
Calcium	ppm	ASTM D5185m	5.0	0	0	0
Phosphorus	ppm	ASTM D5185m	60	302	296	305
Zinc	ppm	ASTM D5185m	5.0	2	<1	3
Sulfur	ppm	ASTM D5185m	1900	1300	1097	1285
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	2	10
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	1	1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	1637	3381	3165
Particles >6µm		ASTM D7647	>5000	542	1486	1296
Particles >14μm		ASTM D7647	>640	93	359	251
Particles >21μm		ASTM D7647	>160	36	161	99
Particles >38μm		ASTM D7647	>40	2	17	7
Particles >71μm		ASTM D7647		0	1	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/16/14	19/18/16	19/17/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045 0.3


**0.34** 0.37 0.38 Contact/Location: RYAN LOWE - HORAUS


Page 1 of 2



## **OIL ANALYSIS REPORT**

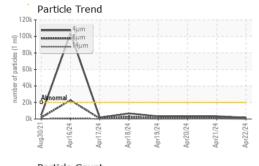


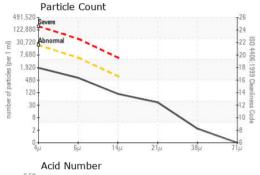

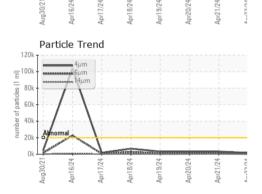

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	452	<u> </u>	<b>△</b> 135	<b>▲</b> 137
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color	
Bottom	

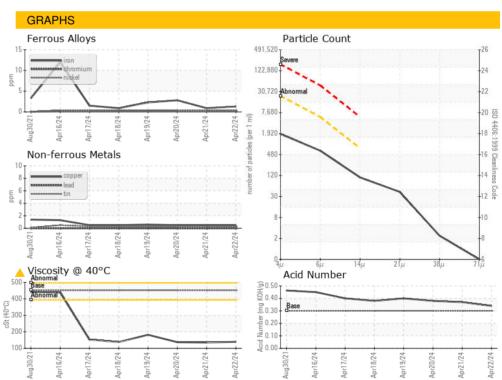



0.1 PG

0.00



Certificate 12367

Laboratory Sample No.

Lab Number : 06157663 Unique Number : 10993086

: WC0923583

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** 

Diagnosed

: 23 Apr 2024 : 24 Apr 2024 : 25 Apr 2024 - Angela Borella

Test Package : IND 2 ( Additional Tests: PrtCount ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

1101 NORTH MAIN ST AUSTIN, MN

**HORMEL FOODS - AUSTIN** 

US 55912 Contact: RYAN LOWE rslowe@hormel.com

T: (507)437-5674 F: (507)437-9805