

OIL ANALYSIS REPORT

Sample Rating Trend

WATER

Machine Id

CENTRAL DUPAGE (S/N 10001188)

Component Hydraulic System

MOBIL DTE FM 32 (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.


Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.








SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0003043	PH05833223	
Sample Date		Client Info		03 Apr 2024	02 Mar 2023	
Machine Age	yrs	Client Info		1	0	
Oil Age	yrs	Client Info		0	1	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	
Chromium	ppm	ASTM D5185m	>20	<1	0	
Nickel	ppm	ASTM D5185m	>20	<1	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	2	0	
Lead	ppm	ASTM D5185m	>20	0	0	
Copper	ppm	ASTM D5185m	>20	1	0	
Tin	ppm	ASTM D5185m	>20	<1	0	
Vanadium	ppm	ASTM D5185m	0	<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		<1	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m		2	2	
Calcium	ppm	ASTM D5185m		0	3	
Phosphorus	ppm	ASTM D5185m		451	568	
Zinc	ppm	ASTM D5185m		10	2	
Sulfur	ppm	ASTM D5185m		474	675	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	12	0	
Sodium	ppm	ASTM D5185m		0	<1	
Potassium	ppm	ASTM D5185m	>20	<1	0	
Water	%	ASTM D6304	>0.05	6 0.059		
ppm Water	ppm	ASTM D6304	>500	590		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	3386	773	
Particles >6µm		ASTM D7647	>2500	225	248	
Particles >14µm		ASTM D7647	>320	10	17	
Particles >21µm		ASTM D7647	>80	3	4	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/15/10	17/15/11	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.44	0.38	




OIL ANALYSIS REPORT



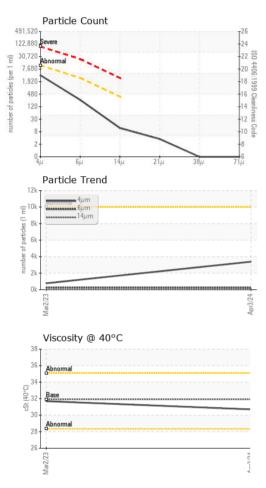



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
and/Dirt	scalar	*Visual	NONE	NONE	NONE	
ppearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
mulsified Water	scalar	*Visual	>0.05	0.2%	NEG	
ree Water	scalar	*Visual		NEG	NEG	
FLUID PROPERT	IES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D445	31.9	30.7	31.7	
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color						no image
ottom						no image
PrtFilter					no image	no image
GRAPHS						
Ferrous Alloys						
1			De	rtiala Filtar (N		
iron thromium			Ра	rticle Filter (N	1agn: 200 x)	
iron			Pa	rticle Filter (N	Оµ	100 200 ³⁰⁰ -
iron tromium				rticle Filter (N	Оµ	100 200 300,
iron chromium nickel				rticle Filter (N	Оµ	100 200 300µ 1
iron tromium			Pa	rticle Filter (M	Оµ	10) 200 300, 11111111 1111111
iron chromium nickel	s			rticle Filter (M	Оµ	00 20 ³⁰ , 111111111 11111111
iron stronmium nickel	s			rticle Filter (N	Оµ	100 200 300 1
iron stronmium nickel	s			rticle Filter (N	Оµ	100 200 ³⁰⁰ 1
iron tronmium nickel	S			rticle Filter (N	Оµ	100 200 ²⁰⁰
Non-ferrous Metal	S		Apr3/24	rticle Filter (M	Оµ	100 200 ^{300,}
Non-ferrous Metal	S		Apr3/24	rticle Filter (M	Оµ	00 20 ²⁰ 0 1111111 111111
iron chromium nickel Non-ferrous Metal	S			rticle Filter (N	Оµ	00 20 ³⁰) mmm mmm
Non-ferrous Metal	S		Apr3/24		¢ Innun	100 200 ³⁰⁰
iron chromium nickel	S		Apr3/24		¢ Innun	100 200 300
Non-ferrous Metal	S		Apr3/24		¢ Innun	100 200 300
Non-ferrous Metal	S		Apr3/24		¢ Innun	
Viscosity @ 40°C	S		Apr3/24		¢ Innun	



Contact/Location: JILL BRENENGEN - IMRCHA