

Area
PLOGER
Machine Id

## **OIL ANALYSIS REPORT**

Sample Rating Trend



6174 - PLOGER **Rear Differential** Fluid {not provided} (--- GAL)

#### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0900785	WC0728471	WC0647542
Sample Date		Client Info		02 Sep 2023	02 Sep 2022	20 Oct 2021
Machine Age	mls	Client Info		540741	540741	477246
Dil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>500	280	189	113
Chromium	ppm	ASTM D5185m	>10	3	2	1
Nickel	ppm	ASTM D5185m	>10	7	3	2
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	6
Aluminum	ppm	ASTM D5185m	>25	2	6	3
Lead	ppm	ASTM D5185m	>25	_ <1	0	0
Copper	ppm	ASTM D5185m	>100	3	2	2
Tin	ppm	ASTM D5185m	>10	1	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m	-	<1	1	0
Cadmium	ppm	ASTM D5185m		<1	0	<1
	PPIII		11 11 11		-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		78	86	90
Barium	ppm	ASTM D5185m		0	0	0
Volybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		8	4	3
Vagnesium	ppm	ASTM D5185m		152	109	173
Calcium	ppm	ASTM D5185m		9	0	11
Phosphorus	ppm	ASTM D5185m		1504	1256	1827
Zinc	ppm	ASTM D5185m		11	0	3
Sulfur	ppm	ASTM D5185m		25820	21642	23612
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	34	17	19
Sodium	ppm	ASTM D5185m		4	6	5
Potassium	ppm	ASTM D5185m	>20	5	3	2
Water	%	ASTM D6304		0.044	0.046	0.064
ppm Water	ppm	ASTM D6304	>2000	440	460.7	640.2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>47143</b>		
Particles >6µm		ASTM D7647	>5000	1337		
Particles >14µm		ASTM D7647	>640	10		
Particles >21µm		ASTM D7647	>160	3		
Particles >38µm		ASTM D7647	>40	0		
Particles >71µm		ASTM D7647 ASTM D7647	>10	0		
		ISO 4406 (c)	>10	0 <u> </u>		
()II (`loanlinooc		1, 1, 1, 444 U(1) ((1)	201/17/10	- Z3/10/1U		
		( )				
Oil Cleanliness FLUID DEGRADA		method	limit/base	current	history1	history2

Report Id: BASTARHD [WUSCAR] 06157700 (Generated: 04/25/2024 11:14:43) Rev: 1

```
Contact/Location: GIANNA CREDAROLI - BASTARHD
```

Page 1 of 2



# **OIL ANALYSIS REPORT**

ep2/22

: WearCheck USA - 501 Madison Ave., Cary, NC 27513


Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)


Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)


Received


Diagnosed

Tested





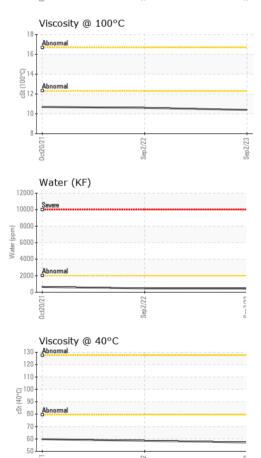

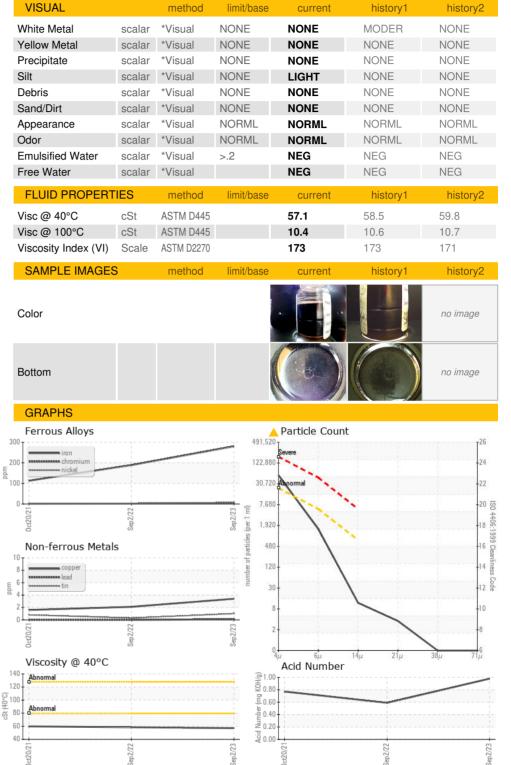

ep2/23

: 23 Apr 2024

: 24 Apr 2024

: 25 Apr 2024 - Jonathan Hester



Report Id: BASTARHD [WUSCAR] 06157700 (Generated: 04/25/2024 11:14:43) Rev: 1

Certificate 12367

Laboratory

Sample No.

Lab Number

Unique Number : 10993123

: WC0900785

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

:06157700

Contact/Location: GIANNA CREDAROLI - BASTARHD

US 10591

T:

F:

**BASF - GIANNA CREDAROLI** 

Contact: GIANNA CREDAROLI

gianna.credaroli@basf.com

500 WHITE PLAINS RD

TARRYTOWN, NY