

OIL ANALYSIS REPORT

{UNASSIGNED} APM2-80 (S/N C03L09828)

1 Rotary Compressor

{not provided} (2 GAL)

Sample Rating Trend ISO

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	NOITAN	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0926266		
Sample Date		Client Info		16 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	7		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>3	2		
Lead	ppm	ASTM D5185m	>4	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>3	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
	PP					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		1		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m				
Zinc				283		
Sulfur	ppm	ASTM D5185m		283 0		
CONTAMINANTS	ppm ppm	ASTM D5185m ASTM D5185m				
CONTAMINANTS	ppm		limit/base	0		
Silicon	ppm	ASTM D5185m	limit/base	0 1536		
	ppm	ASTM D5185m method		0 1536 current		
Silicon	ppm	ASTM D5185m method ASTM D5185m		0 1536 current	history1	history2
Silicon Sodium	ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>45 >20	0 1536 current 9 0 <1	history1	history2
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	>45 >20	0 1536 current 9 0	history1	history2
Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm	Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>45 >20	0 1536 current 9 0 <1 0.042	history1	history2
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>45 >20 >0.6	0 1536 current 9 0 <1 0.042 420	history1	history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>45 >20 >0.6 limit/base	0 1536 current 9 0 <1 0.042 420 current	history1 history1	history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>45 >20 >0.6 limit/base >10000	0 1536 current 9 0 <1 0.042 420 current 18207	history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >10000 >2500	0 1536 current 9 0 <1 0.042 420 current 18207 3226	history1 history1 history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >10000 >2500 >320	0 1536 current 9 0 <1 0.042 420 current 18207 3226 178	history1 history1 history1	history2 history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm	MSTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >10000 >2500 >320 >80	0 1536 current 9 0 <1 0.042 420 current 18207 3226 178 44	history1 history1 history1	history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >10000 >2500 >320 >80 >20	0 1536 current 9 0 <1 0.042 420 current 18207 3226 178 44 2	history1 history1 history1	history2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>45 >20 >0.6 limit/base >10000 >2500 >320 >80 >20 >4	0 1536 current 9 0 <1 0.042 420 current 18207 3226 178 44 2	history1 history1 history1	history2 history2



OIL ANALYSIS REPORT

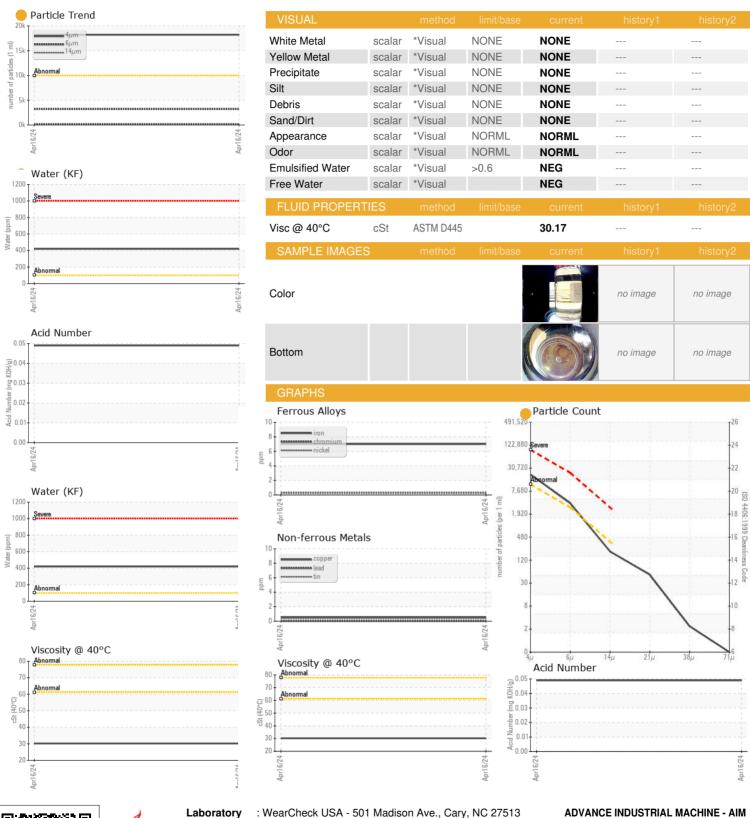





Certificate 12367

Sample No.

Laboratory

: WC0926266 Lab Number : 06157701 Unique Number : 10993124 Test Package : PLANT

Received **Tested**

Diagnosed

: 23 Apr 2024

: 26 Apr 2024 : 29 Apr 2024 - Jonathan Hester

US 30907 Contact: JEFF BELLA jbella@aim-aig.com

T: (706)364-0010

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ADVAUG [WUSCAR] 06157701 (Generated: 04/29/2024 12:39:31) Rev: 1

Contact/Location: JEFF BELLA - ADVAUG

902 SHARTOM ROAD

AUGUSTA, GA