


# **OIL ANALYSIS REPORT**

Sample Rating Trend

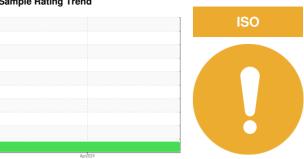

Machine Id

# SHELL TXM-M 10W30

Component Bulk Tank New (Unused) Oil

{not provided} (--- GAL)

### Recommendation

This is a baseline read-out on the submitted sample. Please note that this is a corrected copy for data entry updates.


### Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

			,	Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PE0002639		
Sample Date		Client Info		17 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status		Onorie iriio		ATTENTION		
CONTAMINATIO	)NI	method	limit/base	current	history1	history2
Water	/IN	WC Method	iiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	mm bass	0		
Chromium	ppm	ASTM D5185m		0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum		ASTM D5185m		0		
Lead	ppm	ASTM D5185m		0		
Copper	ppm	ASTM D5185m		0		
Coppei Tin	ppm	ASTM D5185m		0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
	ppm	MOTIVI DOTODITI		U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		99		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		2		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		62		
Calcium	ppm	ASTM D5185m		3644		
Phosphorus	ppm	ASTM D5185m		1168		
Zinc	ppm	ASTM D5185m		1522		
Sulfur	ppm	ASTM D5185m		3820		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		14		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>6569</b>		
Particles >6µm		ASTM D7647	>1300	1103		
Particles >14μm		ASTM D7647	>160	46		
Particles >21µm		ASTM D7647	>40	11		
Particles >38μm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>20/17/13</b>		



## **OIL ANALYSIS REPORT**

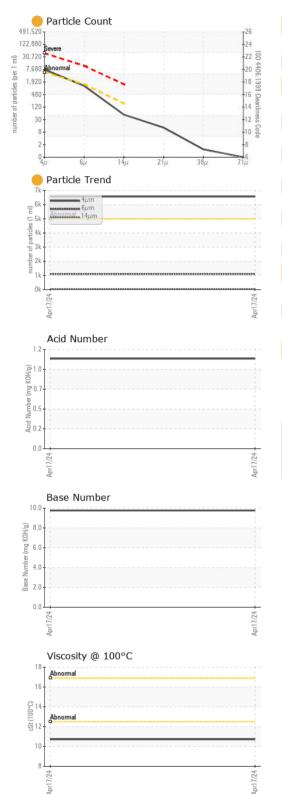

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.09		
Base Number (BN)	mg KOH/g	ASTM D2896		9.76		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
<b>Emulsified Water</b>	scalar	*Visual		NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		61.72		
Visc @ 100°C	cSt	ASTM D445		10.72		
Viscosity Index (VI)	Scale	ASTM D2270		165		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image





Certificate 12367

Laboratory

**Sample No.** : PE0002639 Lab Number : 06158206

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 23 Apr 2024

Tested : 07 May 2024 Diagnosed

: 07 May 2024 - Doug Bogart

1977 Claxter Road NE Salem, OR US 97301

Unique Number : 10993629 Test Package : PLANT ( Additional Tests: FT-IR, ICP, KV100, KV40, PrtCount, SCREEN, TEDAntYact: Donovan Bresko To discuss this sample report, contact Customer Service at 1-800-237-1369.

dbresko@petrocard.com T: (800)950-3835

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PetroCard - Salem