




# OIL ANALYSIS REPORT

## Sample Rating Trend

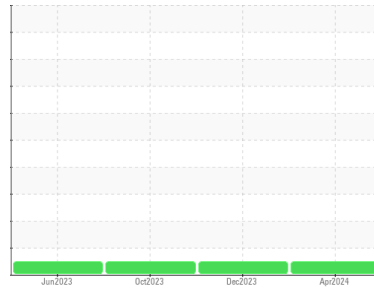

**NORMAL**



Machine Id  
**98089**  
 Component  
**Gasoline Engine**  
 Fluid  
**PETRO CANADA SUPREME SYNTHETIC 5W-20 (6 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0004327</b>	SBP0004329	SBP0004336
Sample Date	Client Info			<b>19 Apr 2024</b>	21 Dec 2023	11 Oct 2023
Machine Age	mls	Client Info		<b>220680</b>	209932	209932
Oil Age	mls	Client Info		<b>5624</b>	5147	5379
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>13</b>	11	8
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>4</b>	2	6
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>155	<b>3</b>	2	3
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	232	<b>60</b>	51	39
Barium	ppm	ASTM D5185m	<1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	78	<b>72</b>	69	70
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	577	<b>551</b>	517	496
Calcium	ppm	ASTM D5185m	1002	<b>1211</b>	1115	1147
Phosphorus	ppm	ASTM D5185m	739	<b>730</b>	674	677
Zinc	ppm	ASTM D5185m	834	<b>832</b>	790	795
Sulfur	ppm	ASTM D5185m	2510	<b>3191</b>	2865	3001

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>12</b>	11	13
Sodium	ppm	ASTM D5185m	>400	<b>2</b>	0	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.1</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.8</b>	12.3	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.9</b>	23.3	23.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.3</b>	17.2	18.2
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	<b>3.7</b>	4.3	4.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

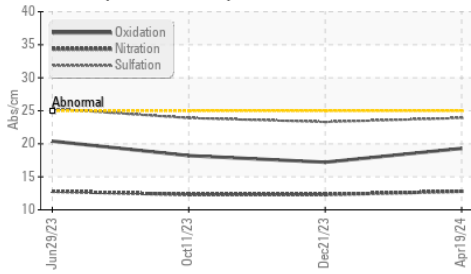

Base Number

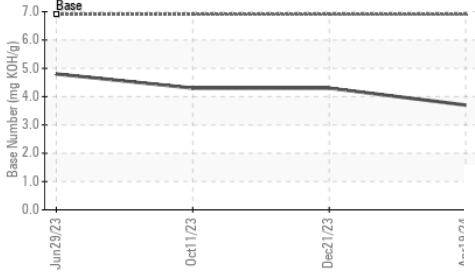

Viscosity @ 100°C

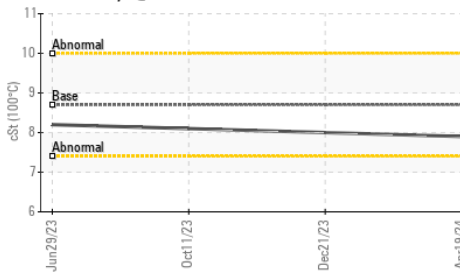


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	8.7	<b>7.9</b>	8	8.1

## GRAPHS


Ferrous Alloys

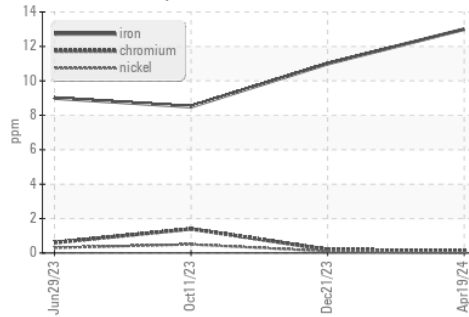


Non-ferrous Metals

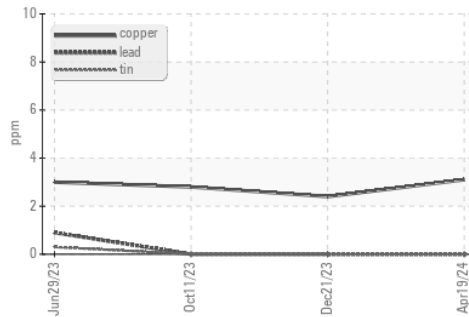

Viscosity @ 100°C

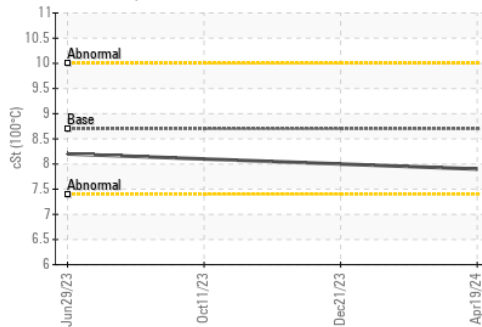

Base Number

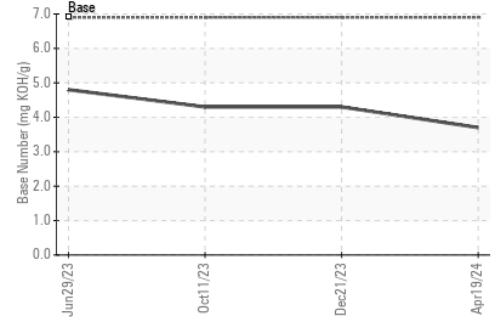

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004327  
**Lab Number** : 06158364  
**Unique Number** : 10993787  
**Test Package** : FLEET

**Received** : 23 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**Sapp Bros. Fleet - Norfolk Location**  
 1216 W. Monroe Ave.  
 Norfolk, NE  
 US 68701

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Ty Zelmer  
 tzelmer@sappbros.net  
 T: (402)371-7372  
 F: