


OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id

INTERNATIONAL 530

Diesel Engine

PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

AL)		0ct2022	Jan2023	Sep2023 Oct2023	Apr2024	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0906010	WC0851024	WC0792646
Sample Date		Client Info		18 Apr 2024	04 Oct 2023	13 Sep 2023
Machine Age	mls	Client Info		133382	265485	263156
Oil Age	mls	Client Info		0	5000	5000
Oil Changed		Client Info		Changed	Not Changd	N/A
Sample Status				SEVERE	SEVERE	SEVERE
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	38	54	49
Chromium	ppm	ASTM D5185m	>20	<1	4	4
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	6	5
Lead	ppm	ASTM D5185m	>40	1	<1	<1
Copper	ppm	ASTM D5185m	>330	2	2	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2	7	8
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		48	52	63
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		764	750	830
Calcium	ppm	ASTM D5185m		854	926	1082
Phosphorus	ppm	ASTM D5185m		836	838	925
Zinc	ppm	ASTM D5185m		992	1040	1157
Sulfur	ppm	ASTM D5185m		2682	2308	3109
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	6	6
Sodium	ppm	ASTM D5185m		0	5	4
Potassium	ppm	ASTM D5185m	>20	<1	6	6
Fuel	%	ASTM D3524	>5	17.8	1 5.7	▲ 13.2
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	1.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.3	12.3	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	23.9	25.8
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.8	22.4	22.0
Oxidation Base Number (BN)	Abs/.1mm mg KOH/g	*ASTM D7414 ASTM D2896	>25 9.8	19.8 7.9	22.4 5.8	22.0 6.9



OIL ANALYSIS REPORT

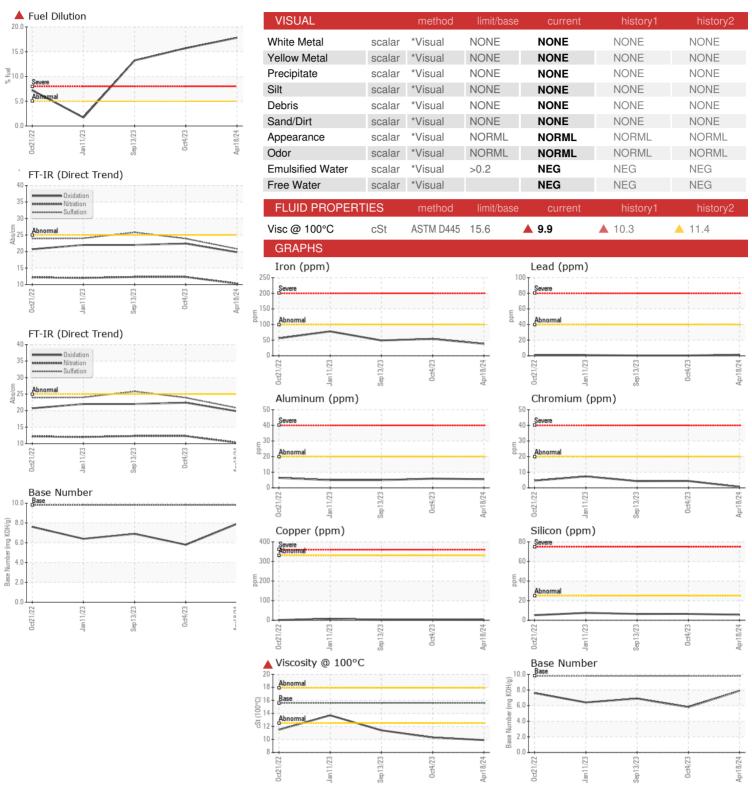





Certificate 12367

Sample No.

: WC0906010 Lab Number : 06158380 Unique Number : 10993803

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 23 Apr 2024 Tested : 25 Apr 2024 Diagnosed

: 25 Apr 2024 - Wes Davis Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

1603 SALEM CHURCH RD GOLDSBORO, NC

Contact: BRANDON BRIGGS brandonbriggs@wcps.org T:

WAYNE CO SCHOOL BUS GARAGE

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 27530

F: