

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

8775733 (S/N 1355) Component Compressor

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|--------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | KCPA013735 | | |
| Sample Date | | Client Info | | 15 Apr 2024 | | |
| Machine Age | hrs | Client Info | | 7185 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >3 | <1 | | |
| Titanium | ppm | ASTM D5185m | >3 | <1 | | |
| Silver | ppm | ASTM D5185m | >2 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >50 | 8 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | | |
| Barium | ppm | ASTM D5185m | 90 | 0 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | 100 | <1 | | |
| Calcium | ppm | ASTM D5185m | 0 | 3 | | |
| Phosphorus | ppm | ASTM D5185m | 0 | 3 | | |
| Zinc | ppm | ASTM D5185m | 0 | 0 | | |
| Sulfur | ppm | ASTM D5185m | 23500 | 14980 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | <1 | | |
| Water | % | ASTM D6304 | >0.05 | 0.006 | | |
| ppm Water | ppm | ASTM D6304 | >500 | 65 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 792 | | |
| Particles >6µm | | ASTM D7647 | >1300 | 223 | | |
| Particles >14µm | | ASTM D7647 | >80 | 28 | | |
| Particles >21µm | | ASTM D7647 | >20 | 9 | | |
| Particles >38µm | | ASTM D7647 | >4 | 0 | | |
| Particles >71µm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | 17/15/12 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | 0.42 | | |



Abnormal

Particle Trend

Sev 35 Apr15/24

4

Ê 1⊧

-<u>18</u> 1k

te ok


0


0

0

0

OIL ANALYSIS REPORT

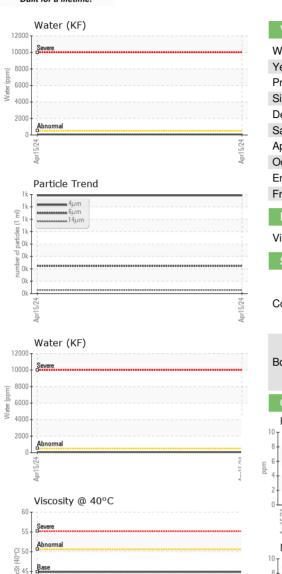

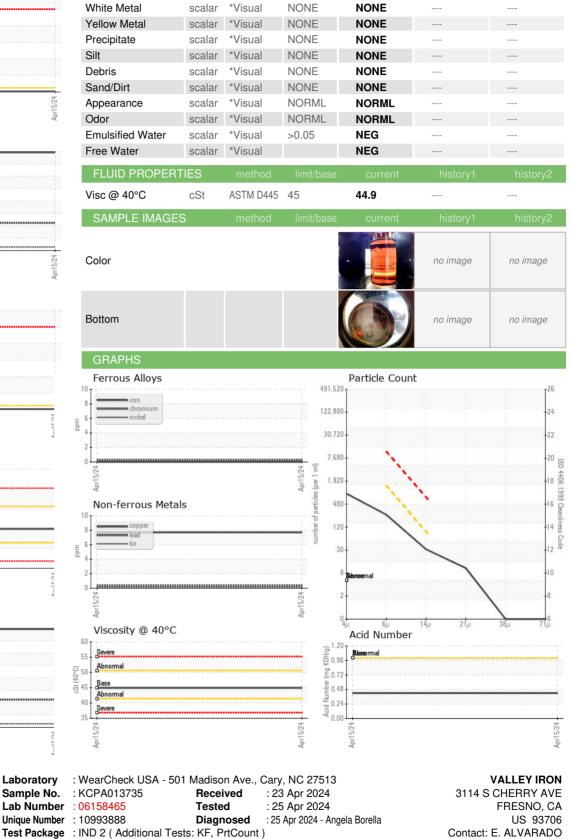

Report Id: VALFRECA [WUSCAR] 06158465 (Generated: 04/25/2024 17:11:31) Rev: 1

Certificate 12367

Laboratory

Sample No.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: E. ALVARADO - VALFRECA

T:

F:

ealvarado@valleyiron.com