

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER SK 15 101995.01 (S/N 2308)

Component Compressor

Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| Iron ppm ASTM D5185m >50 <1 | story2 |
|--|--------|
| Machine Age hrs Client Info 102 | story2 |
| Oil Age hrs Client Info 0 Oil Changed Client Info N/A Sample Status Imit/base current history1 WEAR METALS method limit/base current history1 Iron ppm ASTM D5185m >50 <1 | story2 |
| Oil Changed Client Info N/A Sample Status method limit/base current history1 history1 WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >50 <1 Chromium ppm ASTM D5185m >10 <1 Nickel ppm ASTM D5185m >3 <10 <1 Nickel ppm ASTM D5185m >3 <10 <1 Aluminum ppm ASTM D5185m >10 2 0 Lead ppm ASTM D5185m >10 <1 Vanadium ppm ASTM D5185m >10 <1 ADDITIVES method limit/base current history1 hi Boron ppm ASTM D5185m | story2 |
| Sample Status method limit/base current history1 WEAR METALS method limit/base current history1 history1 history1 Iron ppm ASTM D5185m >50 <1 | story2 |
| WEAR METALS method limit/base current history1 history1 Iron ppm ASTM D5185m >50 <1 | story2 |
| Iron ppm ASTM D5185m >50 <1 Chromium ppm ASTM D5185m >10 <1 | story2 |
| Chromium ppm ASTM D5185m >10 <1 | |
| Depm ASTM D5185m >10 <1 Nickel ppm ASTM D5185m >3 <1 | |
| Nickel ppm ASTM D5185m >3 <1 Titanium ppm ASTM D5185m >3 <1 | |
| Titanium ppm ASTM D5185m >3 <1 Silver ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 2 Lead ppm ASTM D5185m >10 <1 | |
| Silver ppm ASTM D5185m >2 0 Aluminum ppm ASTM D5185m >10 2 Lead ppm ASTM D5185m >10 <1 | |
| Aluminum ppm ASTM D5185m >10 2 Lead ppm ASTM D5185m >10 <1 | |
| Lead ppm ASTM D5185m >10 <1 Copper ppm ASTM D5185m >50 1 Tin ppm ASTM D5185m >10 <1 | |
| Copper ppm ASTM D5185m >50 1 Tin ppm ASTM D5185m >10 <1 | |
| Tin ppm ASTM D5185m >10 <1 Vanadium ppm ASTM D5185m >10 <1 Cadmium ppm ASTM D5185m <0 ADDITIVES method limit/base current history1 hi Boron ppm ASTM D5185m 0 Barium ppm ASTM D5185m 90 13 Molybdenum ppm ASTM D5185m 90 39 Maganese ppm ASTM D5185m 90 39 Magnesium ppm ASTM D5185m 90 39 Phosphorus ppm ASTM D5185m 2 3 ContrAminant ppm ASTM D5185m 2 3 Silicon ppm ASTM D5185m >25 <1 | |
| Vanadium ppm ASTM D5185m 0 Cadmium ppm ASTM D5185m <1 | |
| CadmiumppmASTM D5185m<1ADDITIVESmethodlimit/basecurrenthistory1hiBoronppmASTM D5185m0BariumppmASTM D5185m9013MolybdenumppmASTM D5185m<1 | |
| ADDITIVESmethodlimit/basecurrenthistory1hiBoronppmASTM D5185m0BariumppmASTM D5185m9013MolybdenumppmASTM D5185m<1 | |
| Boron ppm ASTM D5185m 0 Barium ppm ASTM D5185m 90 13 Barium ppm ASTM D5185m 90 13 Molybdenum ppm ASTM D5185m 90 13 Manganese ppm ASTM D5185m 90 39 Magnesium ppm ASTM D5185m 90 39 Calcium ppm ASTM D5185m 2 3 Phosphorus ppm ASTM D5185m 2 3 Zinc ppm ASTM D5185m 2 11 Solicon ppm ASTM D5185m >25 <1 | story2 |
| Barium ppm ASTM D5185m 90 13 Molybdenum ppm ASTM D5185m 90 13 Manganese ppm ASTM D5185m <1 | Storyz |
| Molybdenum ppm ASTM D5185m <1 Manganese ppm ASTM D5185m 90 39 Magnesium ppm ASTM D5185m 90 39 Calcium ppm ASTM D5185m 2 3 Phosphorus ppm ASTM D5185m 2 3 Zinc ppm ASTM D5185m 4 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m >25 <1 Sodium ppm ASTM D5185m 25 <1 | |
| Manganese ppm ASTM D5185m <1 Magnesium ppm ASTM D5185m 90 39 Calcium ppm ASTM D5185m 2 3 Phosphorus ppm ASTM D5185m 2 3 Zinc ppm ASTM D5185m 4 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m<>25 <1 | |
| Magnesium ppm ASTM D5185m 90 39 Calcium ppm ASTM D5185m 2 3 Phosphorus ppm ASTM D5185m 2 3 Zinc ppm ASTM D5185m 4 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m >25 <1 | |
| Calcium ppm ASTM D5185m 2 3 Phosphorus ppm ASTM D5185m 4 Zinc ppm ASTM D5185m 11 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m<>25 <1 | |
| Phosphorus ppm ASTM D5185m 4 Zinc ppm ASTM D5185m 11 CONTAMINANTS method limit/base current history1 history1 Silicon ppm ASTM D5185m >25 <1 Sodium ppm ASTM D5185m 3 | |
| Zinc ppm ASTM D5185m 11 CONTAMINANTS method limit/base current history1 hi Silicon ppm ASTM D5185m<>25 <1 | |
| CONTAMINANTSmethodlimit/basecurrenthistory1hiSiliconppmASTM D5185m>25<1 | |
| Silicon ppm ASTM D5185m >25 <1 Sodium ppm ASTM D5185m 3 | |
| Sodium ppm ASTM D5185m 3 | story2 |
| | |
| | |
| Potassium ppm ASTM D5185m >20 15 | |
| Water % ASTM D6304 >0.05 0.022 | |
| ppm Water ppm ASTM D6304 >500 228 | |
| FLUID CLEANLINESS method limit/base current history1 hi | story2 |
| Particles >4μm ASTM D7647 11782 | |
| Particles >6μm ASTM D7647 >1300 ▲ 2968 | |
| Particles >14μm ASTM D7647 >80 76 | |
| Particles >21μm ASTM D7647 >20 13 | |
| Particles >38μm ASTM D7647 >4 0 | |
| Particles >71μm ASTM D7647 >3 0 | |
| Oil Cleanliness ISO 4406 (c) >/17/13 ▲ 21/19/13 | |
| FLUID DEGRADATION method limit/base current history1 hi | |
| Acid Number (AN) mg KOH/g ASTM D8045 0.4 0.33 | story2 |



(maa)

Water

Water (

OIL ANALYSIS REPORT

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

491,52

122,880 30 720 7.68

1,920

480

120

30

(^{0.50} (⁰/HOX) 0.40

Ē 0.30

· 문 0.20

0.10 Acid

0.00

Aar79

Mar29/24

Ba

(per 1 ml) Mar29/24

>0.05

46

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

current

current

Particle Count

Acid Number

NEG

NEG

43.7

history1

history

history1

no image

no image

history2

history

history2


no image

no imade

4406

:1999 Cle

14

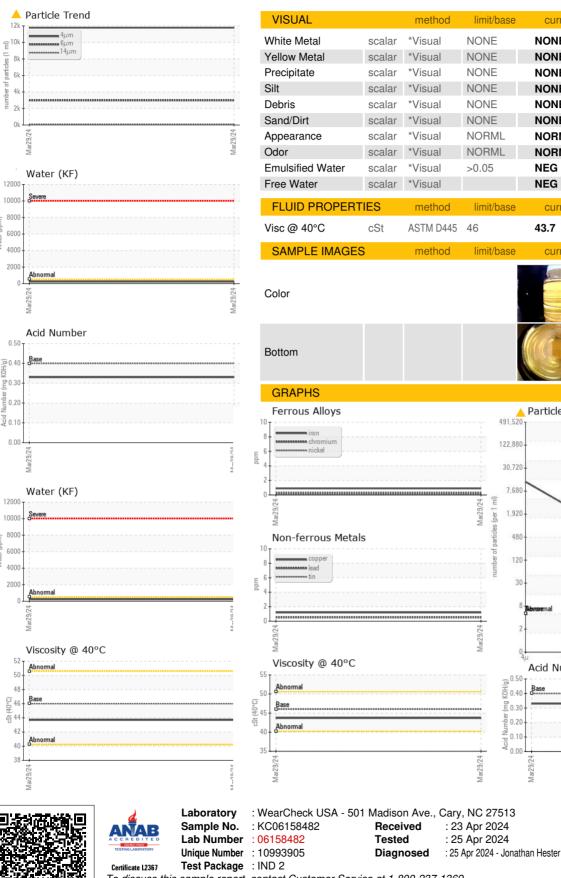

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

PALM CASUAL

ORLANDO, FL

US 32804

3132 N JOHN YOUNG PKWY

Contact: Service Manager

Report Id: PALORL [WUSCAR] 06158482 (Generated: 04/25/2024 20:32:35) Rev: 1

Contact/Location: Service Manager - PALORL Page 2 of 2

214