




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 950G 259
 Component
Diesel Engine
 Fluid
PETRO CANADA 15W40 (32 QTS)

Sample Rating Trend

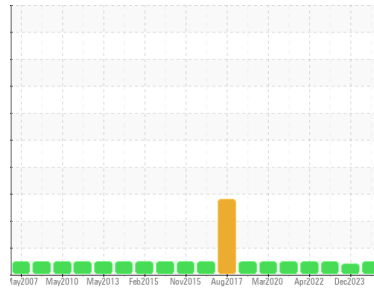

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RW0004754	RW0004741	RW0003939
Sample Date	Client Info		12 Apr 2024	04 Dec 2023	04 Jan 2023
Machine Age	hrs	Client Info	433	0	3096
Oil Age	hrs	Client Info	0	143	251
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	0.4	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	11	15	14
Chromium	ppm	ASTM D5185m >20	<1	0	<1
Nickel	ppm	ASTM D5185m >2	2	5	<1
Titanium	ppm	ASTM D5185m >2	<1	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	2	2
Lead	ppm	ASTM D5185m >40	<1	<1	<1
Copper	ppm	ASTM D5185m >330	3	13	12
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	12	257	8
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	71	232	60
Manganese	ppm	ASTM D5185m	1	5	<1
Magnesium	ppm	ASTM D5185m	891	779	944
Calcium	ppm	ASTM D5185m	1087	1248	1128
Phosphorus	ppm	ASTM D5185m	1027	904	1078
Zinc	ppm	ASTM D5185m	1175	1008	1268
Sulfur	ppm	ASTM D5185m	3101	2893	3855

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	10	3
Sodium	ppm	ASTM D5185m	2	5	2
Potassium	ppm	ASTM D5185m >20	1	0	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	5.7	6.6	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.8	19.8	17.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.3	14.7	13.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.63	12.15	9.77




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

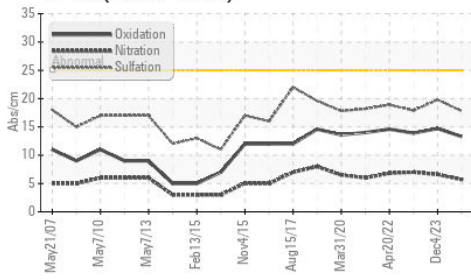

Base Number

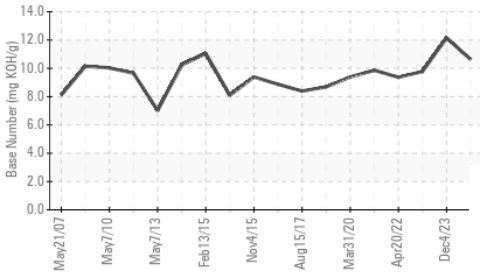









Viscosity @ 100°C

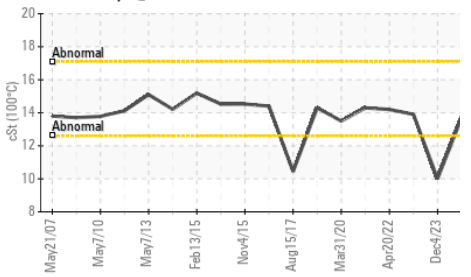

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.7	10.0	13.9

GRAPHS

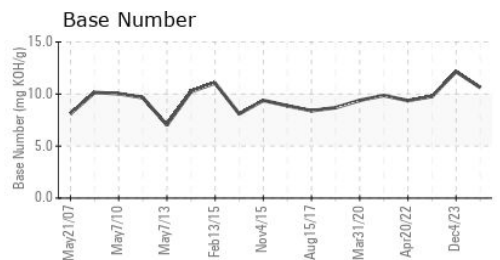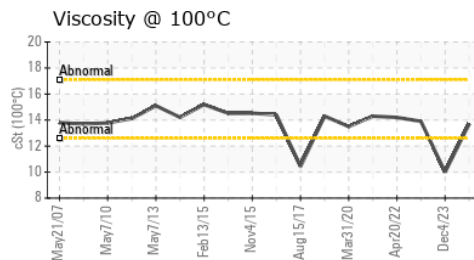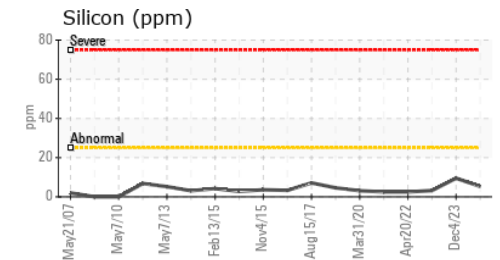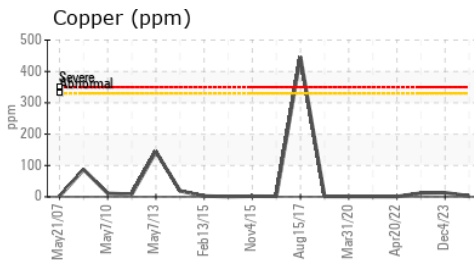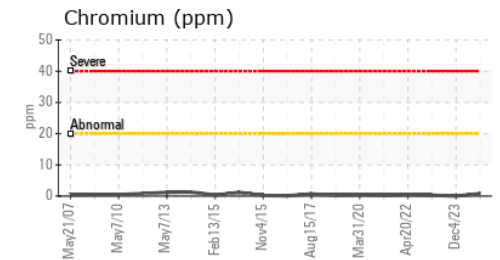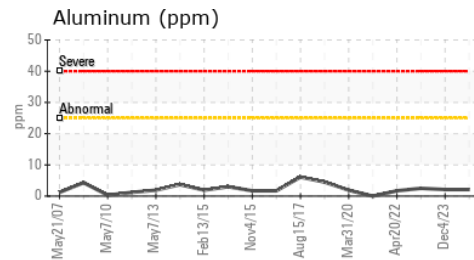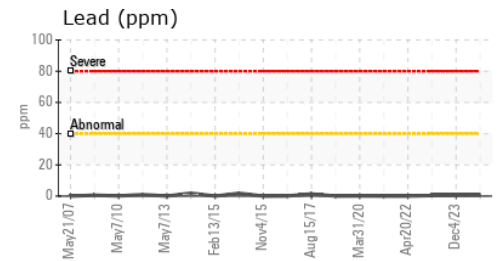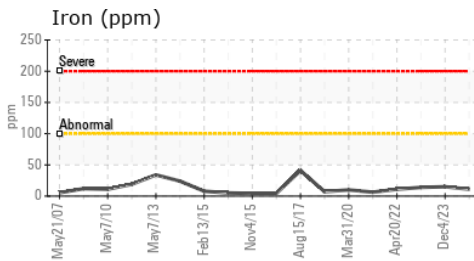

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : RW0004754
 Lab Number : 06158489
 Unique Number : 10993912
 Test Package : MOB 2
 Received : 23 Apr 2024
 Tested : 24 Apr 2024
 Diagnosed : 24 Apr 2024 - Wes Davis

CITY OF FARMINGTON HILLS
 27245 HALSTED RD
 FARMINGTON HILLS, MI
 US 48331
 Contact: JERRY BROCK
 jbrock@fhgov.com
 T: (248)871-2850
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)