OIL ANALYSIS REPORT

Sample Rating Trend

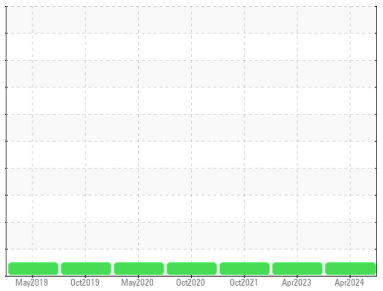

NORMAL

Area
WHEY
Machine Id
NF01PP11BB01
Component
Bearing
Fluid
MOBIL SHC 626 (--- QTS)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0927460**	WC0805910	WC0629284
Sample Date		Client Info		**16 Apr 2024**	21 Apr 2023	24 Oct 2021
Machine Age	mths	Client Info		**0**	0	0
Oil Age	mths	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>2	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**0**	1	<1
Chromium	ppm	ASTM D5185m	>20	**0**	0	0
Nickel	ppm	ASTM D5185m	>20	**0**	0	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m		**0**	0	<1
Aluminum	ppm	ASTM D5185m	>20	**0**	0	0
Lead	ppm	ASTM D5185m	>20	**0**	0	0
Copper	ppm	ASTM D5185m	>20	**0**	<1	1
Tin	ppm	ASTM D5185m	>20	**0**	0	0
Antimony	ppm	ASTM D5185m		**---**	---	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**0**	0	0
Barium	ppm	ASTM D5185m		**0**	0	0
Molybdenum	ppm	ASTM D5185m		**0**	0	0
Manganese	ppm	ASTM D5185m		**0**	<1	<1
Magnesium	ppm	ASTM D5185m		**0**	2	0
Calcium	ppm	ASTM D5185m		**0**	<1	0
Phosphorus	ppm	ASTM D5185m		**419**	409	443
Zinc	ppm	ASTM D5185m		**13**	1	0
Sulfur	ppm	ASTM D5185m		**102**	152	96

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	**0**	0	0
Sodium	ppm	ASTM D5185m		**<1**	<1	0
Potassium	ppm	ASTM D5185m	>20	**0**	0	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**LIGHT**	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

OIL ANALYSIS REPORT

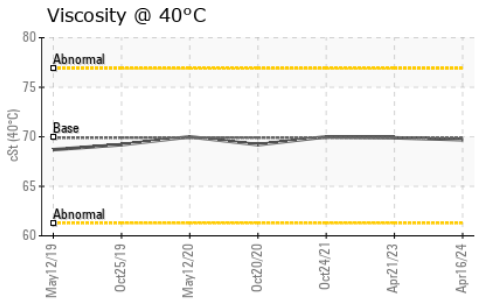

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	69.9	**69.7**	69.9	70.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

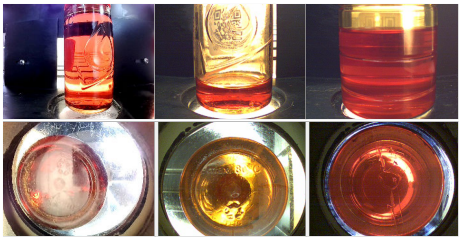

GRAPHS

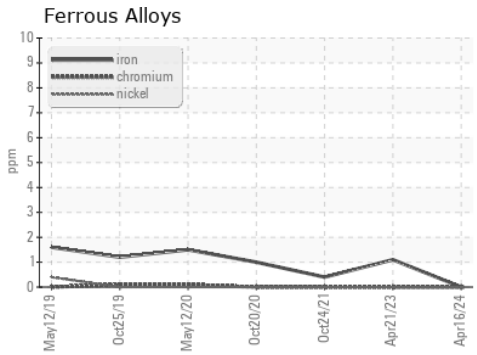

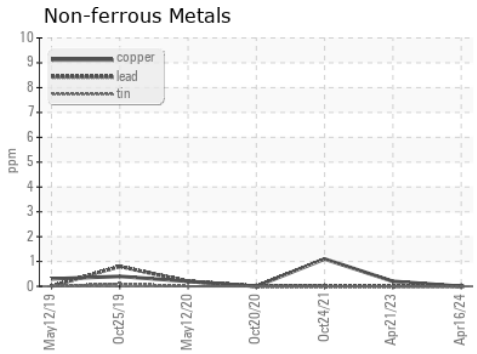

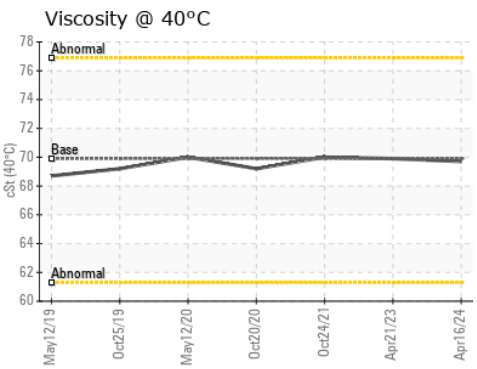

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0927460
Lab Number : 06158644
Unique Number : 10994067
Test Package : IND 1

Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 25 Apr 2024 - Jonathan Hester

LEPRINO FOODS-GREELEY
1302 1ST AVE
GREELEY, CO
US 80631-5909
Contact: ERIC KLINE
EKLINE@LEPRINOFOODS.COM
T:
F: (970)347-5190

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)