




# OIL ANALYSIS REPORT

Sample Rating Trend

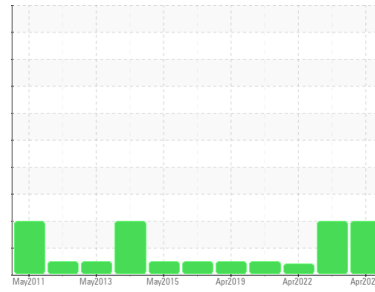

ISO



Machine Id  
**ALSTOM 3513**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO UNIVIS N 32 (55 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0798844</b>	WC0457034	WC0643827
Sample Date	Client Info		<b>20 Apr 2024</b>	25 Apr 2023	23 Apr 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	1	1
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	2	3
Nickel	ppm	ASTM D5185m >10	<b>12</b>	13	21
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m >10	<b>6</b>	7	11
Copper	ppm	ASTM D5185m >75	<b>5</b>	7	9
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m .1	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m .3	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m 74	<b>46</b>	51	55
Phosphorus	ppm	ASTM D5185m 266	<b>318</b>	330	367
Zinc	ppm	ASTM D5185m 338	<b>423</b>	444	442
Sulfur	ppm	ASTM D5185m	<b>2459</b>	2328	2558

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>0</b>	2	2
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	0


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>▲ 11641</b>	▲ 12429	9517
Particles >6µm	ASTM D7647	>1300	<b>▲ 2898</b>	▲ 3115	● 1814
Particles >14µm	ASTM D7647	>160	<b>▲ 201</b>	▲ 222	149
Particles >21µm	ASTM D7647	>40	<b>▲ 48</b>	▲ 51	37
Particles >38µm	ASTM D7647	>10	<b>2</b>	5	5
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>20/17/14	<b>▲ 21/19/15</b>	▲ 21/19/15	● 20/18/14




# OIL ANALYSIS REPORT


▲ Particle Trend

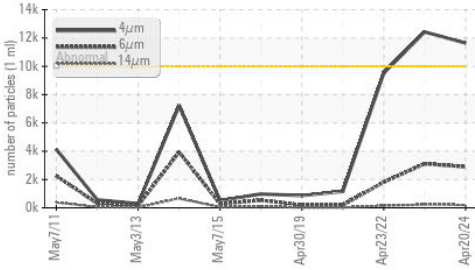


▲ Particle Trend

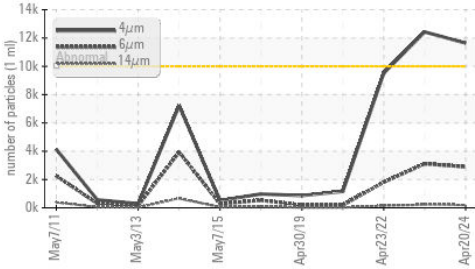

Acid Number

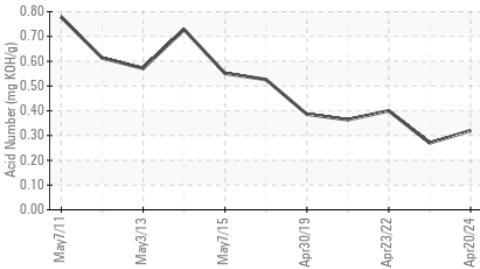

Viscosity @ 40°C

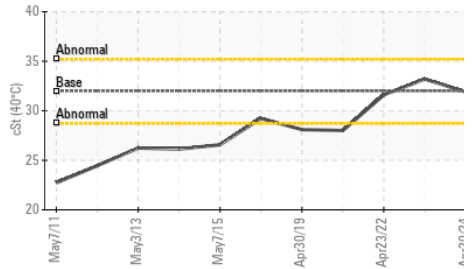

FLUID DEGRADATION	method	limit/base	current	history1	history2
-------------------	--------	------------	---------	----------	----------

Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.32</b>	0.27	0.40
------------------	----------	------------	-------------	------	------


VISUAL	method	limit/base	current	history1	history2
--------	--------	------------	---------	----------	----------

White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------


Visc @ 40°C	cSt	ASTM D445	<b>31.9</b>	33.2	31.6
-------------	-----	-----------	-------------	------	------

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

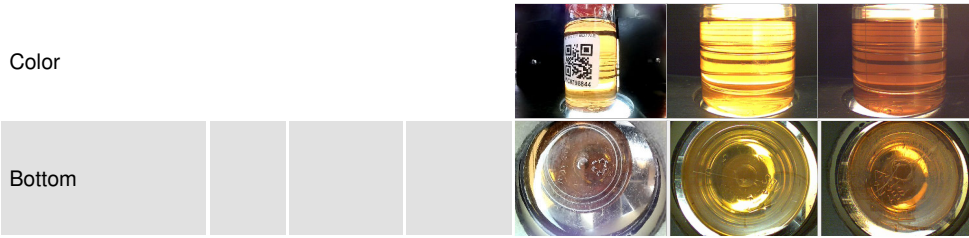


### GRAPHS


Ferrous Alloys

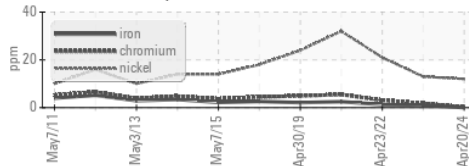


Non-ferrous Metals

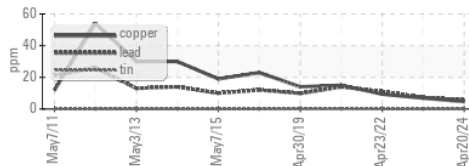


Viscosity @ 40°C

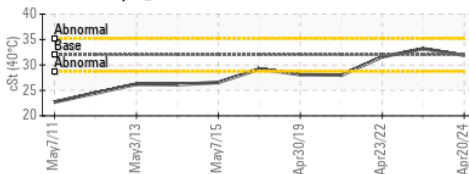

▲ Particle Count

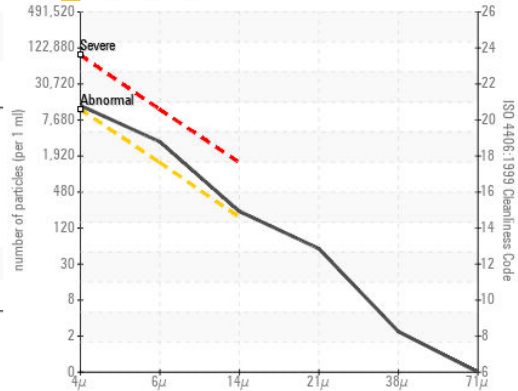

Acid Number

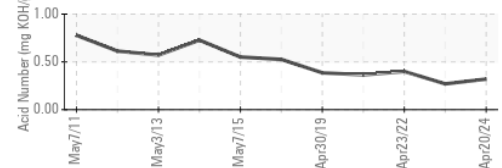

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WC0798844

**Lab Number** : 06159026

**Unique Number** : 10994449

**Test Package** : MOB 2

**Received** : 24 Apr 2024

**Tested** : 25 Apr 2024

**Diagnosed** : 25 Apr 2024 - Don Baldrige

**AMTRAK**

1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR

WASHINGTON, DC

US 20018

Contact: MICHAEL PORTER

michael.porter@amtrak.com

T: (202)870-1399

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)