




# OIL ANALYSIS REPORT

Sample Rating Trend

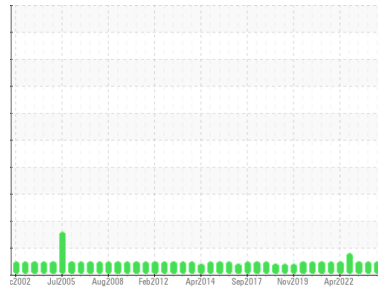

**NORMAL**



Area  
**FILMS DEPARTMENT SAMPLES**  
 Machine Id  
**LUFKIN/WELEX 2A (S/N 242-40478)**  
 Component  
**Gearbox**  
 Fluid  
**TEXACO REGAL OIL R&O 220 (25 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0869527</b>	WC0869564	WC0757268
Sample Date	Client Info			<b>23 Apr 2024</b>	20 Nov 2023	04 Apr 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>9</b>	7	10
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	2	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>200	<b>0</b>	6	1
Tin	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	2	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Phosphorus	ppm	ASTM D5185m	0	<b>76</b>	100	96
Zinc	ppm	ASTM D5185m	0	<b>8</b>	<1	5
Sulfur	ppm	ASTM D5185m	4046	<b>2911</b>	3152	2821

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>29</b>	34	32
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>1830</b>	3870	702
Particles >6µm		ASTM D7647	>5000	<b>143</b>	1805	186
Particles >14µm		ASTM D7647	>640	<b>18</b>	278	21
Particles >21µm		ASTM D7647	>160	<b>3</b>	41	3
Particles >38µm		ASTM D7647	>40	<b>0</b>	4	0
Particles >71µm		ASTM D7647	>10	<b>0</b>	3	0
Oil Cleanliness		ISO 4406 (c)	>--/19/16	<b>18/14/11</b>	19/18/15	17/15/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.27</b>	0.22	0.28


Particle Trend

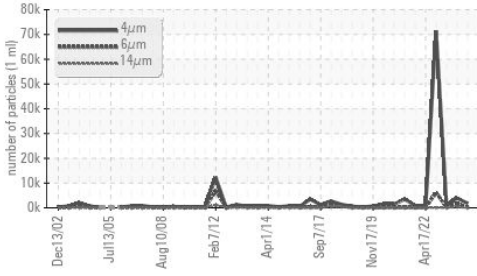


Acid Number

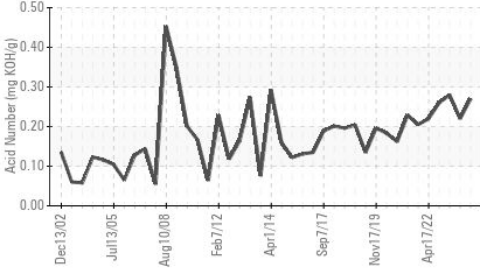

Viscosity @ 40°C

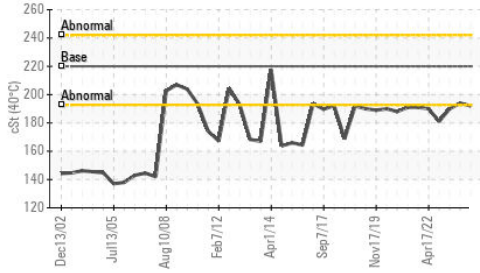

Particle Trend

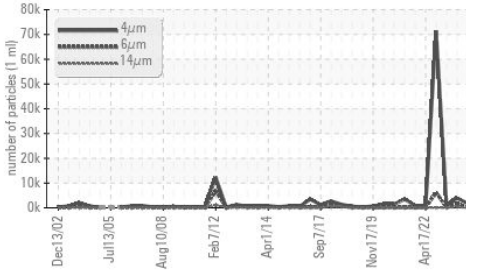

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	192	194	190

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color




Bottom




## GRAPHS


Ferrous Alloys

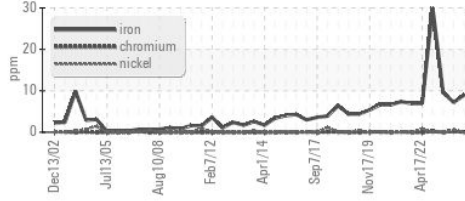


Non-ferrous Metals

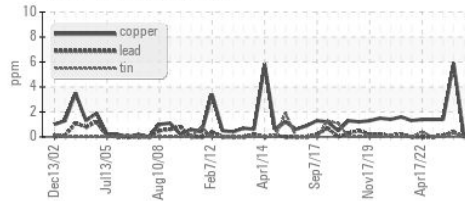


Viscosity @ 40°C

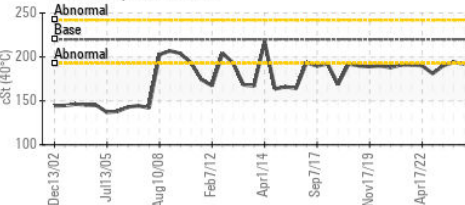

Particle Count

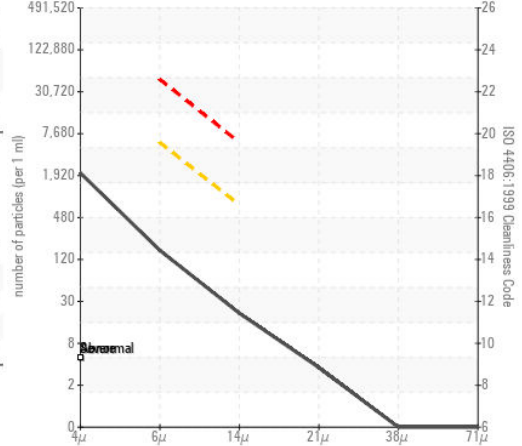

Acid Number

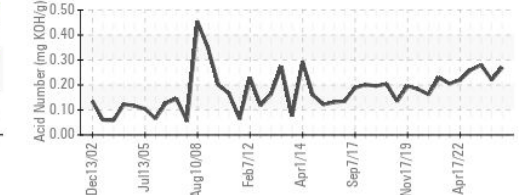

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0869527

Lab Number : 06159068

Unique Number : 10994491

Test Package : IND 2 ( Additional Tests: PrtCount )

Received : 24 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 25 Apr 2024 - Don Baldrige

SEALED AIR CORP - CRYOVAC DIVISION

1301 WEST MAGNOLIA AVE

IOWA PARK, TX

US 76367

Contact: KEVIN KETCHERSID

kevin.a.ketchersid@sealedair.com

T: (940)592-2111

F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)