




OIL ANALYSIS REPORT

Sample Rating Trend

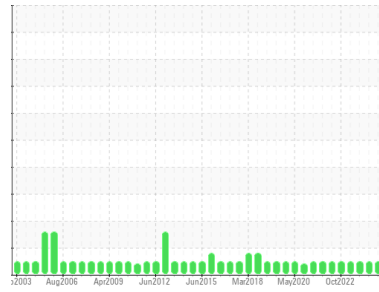

NORMAL



Area
FILMS DEPARTMENT SAMPLES
 Machine Id
EGAN 1B (S/N 503243A)
 Component
Gearbox
 Fluid
TEXACO REGAL OIL R&O 220 (40 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: one of two samples received with same ID and sampling date.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0869524 | WC0821052 | WC0821047 |
| Sample Date | Client Info | | | 23 Apr 2024 | 23 Apr 2024 | 08 Oct 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|-----------|----------|----------|
| Iron | ppm | ASTM D5185m | >200 | 18 | 18 | 15 |
| Chromium | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >100 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >200 | 7 | 7 | 7 |
| Tin | ppm | ASTM D5185m | >25 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 0 | 0 | 0 | 2 |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 0 | 5 |
| Phosphorus | ppm | ASTM D5185m | 0 | 179 | 188 | 194 |
| Zinc | ppm | ASTM D5185m | 0 | 14 | 15 | 2 |
| Sulfur | ppm | ASTM D5185m | 4046 | 9821 | 10107 | 8161 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >50 | 7 | 6 | 7 |
| Sodium | ppm | ASTM D5185m | | 2 | 2 | 1 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | <1 |


| FLUID CLEANLINESS | | method | limit/base | current | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm | | ASTM D7647 | | 1213 | 997 | 274 |
| Particles >6µm | | ASTM D7647 | >5000 | 802 | 693 | 104 |
| Particles >14µm | | ASTM D7647 | >640 | 385 | 209 | 11 |
| Particles >21µm | | ASTM D7647 | >160 | 73 | 23 | 3 |
| Particles >38µm | | ASTM D7647 | >40 | 0 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | >10 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >--/19/16 | 17/17/16 | 17/17/15 | 15/14/11 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.75 | 0.75 | 0.67 |


Particle Trend

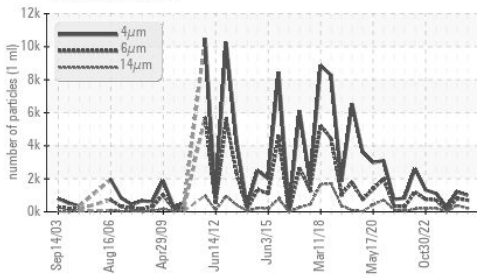


Acid Number

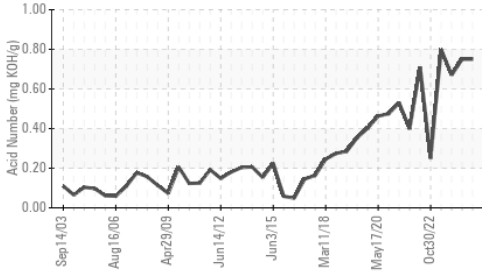

Viscosity @ 40°C

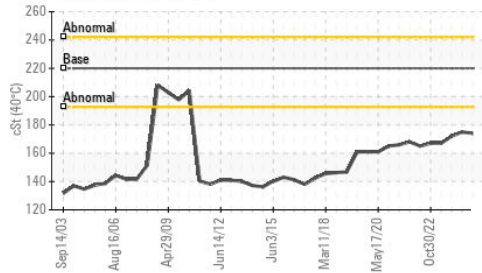

Particle Trend

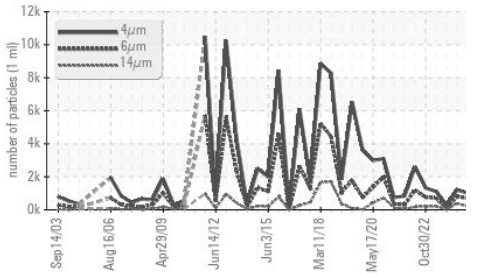

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 220 | 174 | 175 | 172 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

Color




Bottom




GRAPHS


Ferrous Alloys

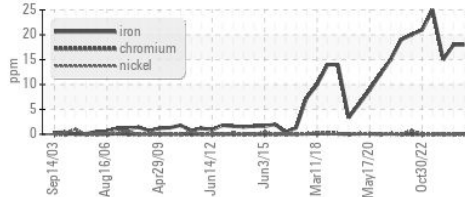


Non-ferrous Metals

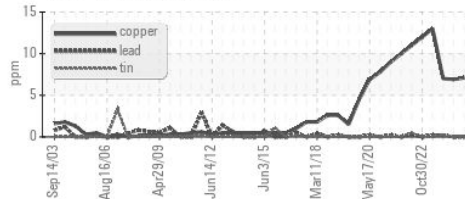


Viscosity @ 40°C

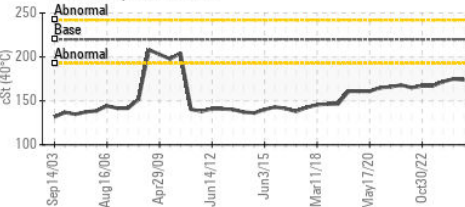

Particle Count

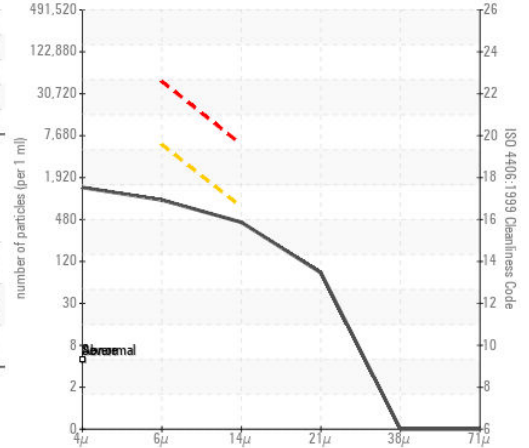

Acid Number

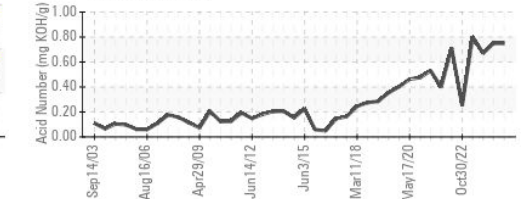

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0869524

Lab Number : 06159069

Unique Number : 10994492

Test Package : IND 2 (Additional Tests: PrtCount)

Received : 24 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 25 Apr 2024 - Don Baldrige

SEALED AIR CORP - CRYOVAC DIVISION

1301 WEST MAGNOLIA AVE

IOWA PARK, TX

US 76367

Contact: KEVIN KETCHERSID

kevin.a.ketchersid@sealedair.com

T: (940)592-2111

F: (940)592-2513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)