

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

BS-3 (S/N 8511-07) Component Hydraulic System JAX FGG-AW ISO 320 (15 GAL)

DIAGNOSIS

A Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.


Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



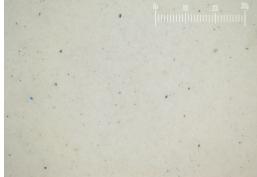

SAMPLE INFORMA	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0002283		
Sample Date		Client Info		12 Feb 2024		
	hrs	Client Info		0		
ů,	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	9		
Chromium	ppm	ASTM D5185m	>20	0		
	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		8		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		173		
	ppm	ASTM D5185m		8		
Sulfur	ppm	ASTM D5185m		13679		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLINE	SS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	6050		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14µm		ASTM D7647	>320	129		
Particles >21µm		ASTM D7647	>80	31		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	23/20/14		
FLUID DEGRADAT	ION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045

0.55

Report Id: MICJUN [WUSCAR] 06159078 (Generated: 04/26/2024 08:01:10) Rev: 1

Contact/Location: SCOTT NYP - MICJUN Page 1 of 2



491.520 122.88

Ê 30,720

number of particles (per 1

7 68

1.92 480

120

30

8

60 ^{〒50k}

1 1) 40k 30k

20

10 0

0.60

(B/HO) Ê0.36 E 0.24

Pio 0.12 0.00

36

350 340

్ల 330

. € 320 Ba र्दे ₃₁₀ 300

290


280 Feb12/24

9

Feb 1

BC

OIL ANALYSIS REPORT

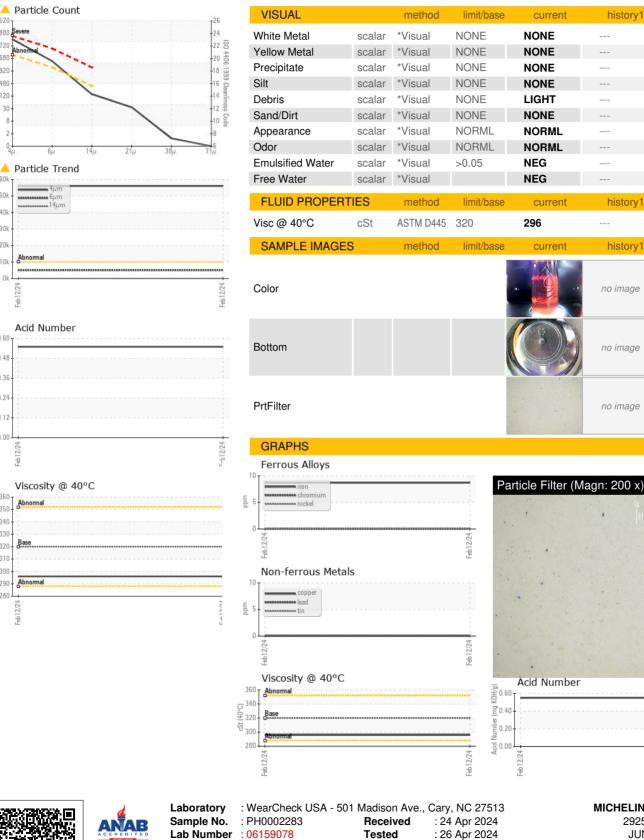

MICHELIN JUNCTION CITY 2925 INDUSTRIAL ST JUNCTION CITY, KS US 66441 Contact: SCOTT NYP SCOTT.NYP@MICHELIN.COM T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

2/24 eb1

Report Id: MICJUN [WUSCAR] 06159078 (Generated: 04/26/2024 08:01:10) Rev: 1

Certificate 12367

Unique Number : 10994501

Test Package : PLANT (Additional Tests: PrtFilter)

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Diagnosed

: 26 Apr 2024 - Jonathan Hester

Contact/Location: SCOTT NYP - MICJUN Page 2 of 2

history1

history

history1

no image

no image

no image

history2

history2

history2

no image

no imade

no image