


OIL ANALYSIS REPORT

Sample Rating Trend

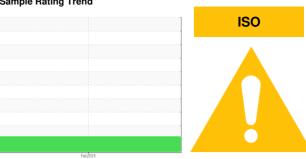

Machine Id

BS-4 (S/N 8578-02)

Component
Hydraulic System

JAX FGG-AW ISO 320 (15 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.


Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0001828		
Sample Date		Client Info		12 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		10		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		171		
Zinc	ppm	ASTM D5185m		10		
Sulfur	ppm	ASTM D5185m		13673		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	6		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	<u>▲</u> 53776		
Particles >6µm		ASTM D7647	>2500	<u>^</u> 7061		
Particles >14μm		ASTM D7647	>320	119		
Particles >21µm		ASTM D7647	>80	23		
Particles >38μm		ASTM D7647	>20	1		
Particles >71μm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>^</u> 23/20/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
				0.56		

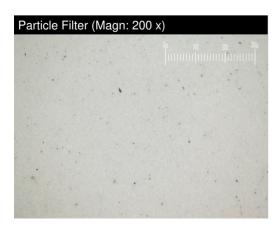

Contact/Location: SCOTT NYP - MICJUN



OIL ANALYSIS REPORT

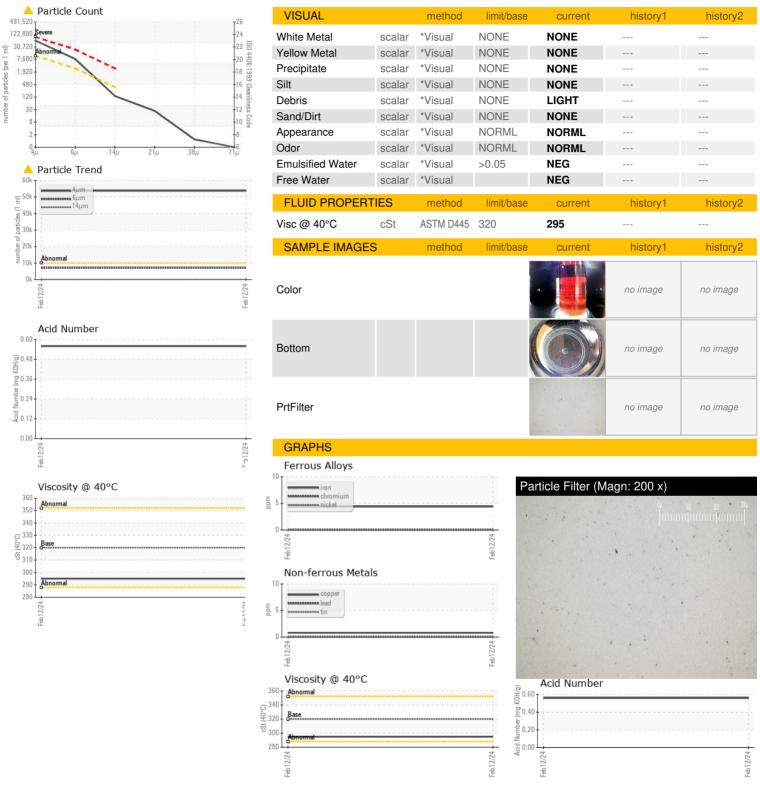





Certificate 12367

Laboratory Sample No.

Unique Number : 10994505

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PH0001828 Lab Number : 06159082

Received **Tested** Diagnosed : 24 Apr 2024

: 26 Apr 2024

: 26 Apr 2024 - Jonathan Hester

Test Package: PLANT (Additional Tests: PrtFilter)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **MICHELIN JUNCTION CITY**

2925 INDUSTRIAL ST JUNCTION CITY, KS US 66441

Contact: SCOTT NYP SCOTT.NYP@MICHELIN.COM

T: F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: MICJUN [WUSCAR] 06159082 (Generated: 04/26/2024 08:01:45) Rev: 1

Contact/Location: SCOTT NYP - MICJUN