OIL ANALYSIS REPORT

Sample Rating Trend

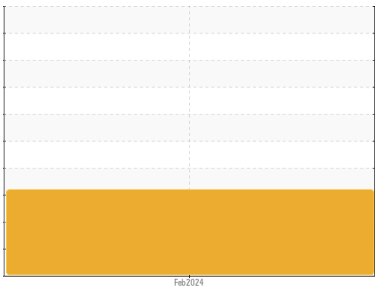

DIRT

Machine Id
TA-1 (S/N 8268-14)
Component
Hydraulic System
Fluid
JAX FGG-AW ISO 320 (35 GAL)

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a high amount of silt (particulates < 14 microns in size) present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition
The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

Particle Filter (Magn: 200 x)

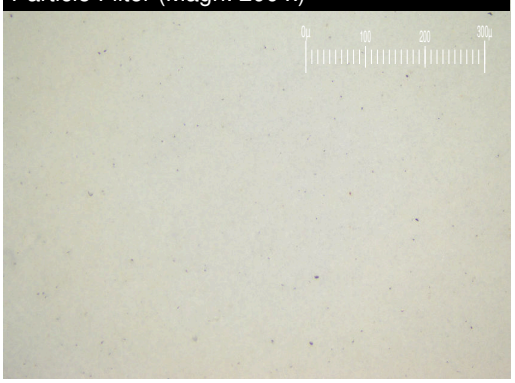

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PH0002282**	---	---
Sample Date		Client Info		**12 Feb 2024**	---	---
Machine Age	hrs	Client Info		**0**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**N/A**	---	---
Sample Status				**ABNORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	**10**	---	---
Chromium	ppm	ASTM D5185m	>20	**0**	---	---
Nickel	ppm	ASTM D5185m	>20	**0**	---	---
Titanium	ppm	ASTM D5185m		**0**	---	---
Silver	ppm	ASTM D5185m		**0**	---	---
Aluminum	ppm	ASTM D5185m	>20	**0**	---	---
Lead	ppm	ASTM D5185m	>20	**0**	---	---
Copper	ppm	ASTM D5185m	>20	**0**	---	---
Tin	ppm	ASTM D5185m	>20	**0**	---	---
Vanadium	ppm	ASTM D5185m		**0**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**10**	---	---
Barium	ppm	ASTM D5185m		**0**	---	---
Molybdenum	ppm	ASTM D5185m		**0**	---	---
Manganese	ppm	ASTM D5185m		**0**	---	---
Magnesium	ppm	ASTM D5185m		**0**	---	---
Calcium	ppm	ASTM D5185m		**6**	---	---
Phosphorus	ppm	ASTM D5185m		**205**	---	---
Zinc	ppm	ASTM D5185m		**13**	---	---
Sulfur	ppm	ASTM D5185m		**12677**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	▲ **29**	---	---
Sodium	ppm	ASTM D5185m		**0**	---	---
Potassium	ppm	ASTM D5185m	>20	**0**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	▲ **42969**	---	---
Particles >6µm		ASTM D7647	>2500	● **3773**	---	---
Particles >14µm		ASTM D7647	>320	**127**	---	---
Particles >21µm		ASTM D7647	>80	**32**	---	---
Particles >38µm		ASTM D7647	>20	**3**	---	---
Particles >71µm		ASTM D7647	>4	**1**	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ **23/19/14**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.46**	---	---

OIL ANALYSIS REPORT

Particle Count

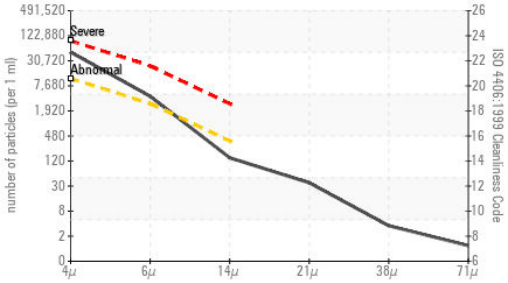

Particle Trend

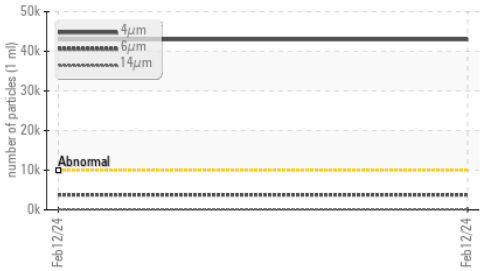

Silicon (ppm)

Viscosity @ 40°C

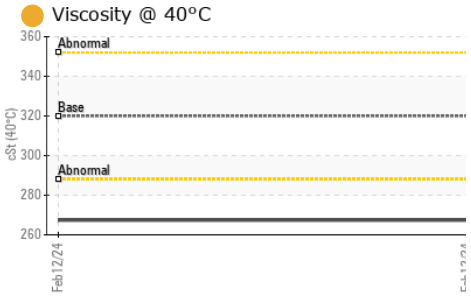

Acid Number

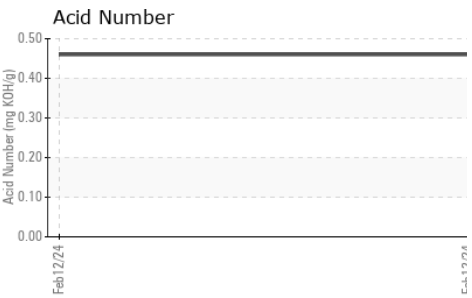

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.05	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	**267.4**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

Ferrous Alloys

Non-ferrous Metals

Viscosity @ 40°C

Particle Filter (Magn: 200 x)

Acid Number

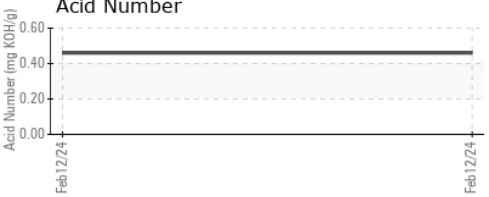

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0002282 **Received** : 24 Apr 2024
Lab Number : 06159083 **Tested** : 29 Apr 2024
Unique Number : 10994506 **Diagnosed** : 30 Apr 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: PrtFilter)

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MICHELIN JUNCTION CITY
2925 INDUSTRIAL ST
JUNCTION CITY, KS
US 66441
Contact: SCOTT NYP
SCOTT.NYP@MICHELIN.COM
T:
F: