




# OIL ANALYSIS REPORT

## Sample Rating Trend

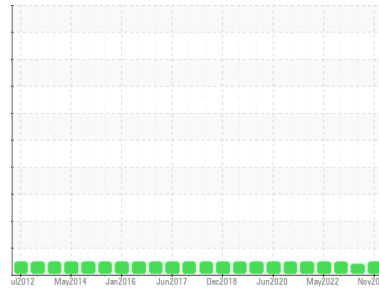

**NORMAL**



Machine Id  
**IZ/11WM**

Component  
**Gearbox**

Fluid  
**MOBIL MOBILGEAR SHC XMP 320 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0807466</b>	WC0807374	WC0695214
Sample Date	Client Info			<b>16 Nov 2023</b>	28 Mar 2023	19 Dec 2022
Machine Age	mths	Client Info		<b>0</b>	0	111240
Oil Age	mths	Client Info		<b>111</b>	103	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>46</b>	37	42
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>200	<b>1</b>	4	<1
Tin	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	1	<1
Calcium	ppm	ASTM D5185m	0	<b>0</b>	1	0
Phosphorus	ppm	ASTM D5185m	485	<b>401</b>	387	367
Zinc	ppm	ASTM D5185m	0	<b>43</b>	16	19
Sulfur	ppm	ASTM D5185m		<b>5391</b>	1337	4108






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>5</b>	8	6
Sodium	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Water	%	ASTM D6304	>0.2	<b>NEG</b>	NEG	NEG

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<b>3352</b>	---	379
Particles >6µm		ASTM D7647	>5000	<b>262</b>	---	89
Particles >14µm		ASTM D7647	>640	<b>30</b>	---	7
Particles >21µm		ASTM D7647	>160	<b>12</b>	---	3
Particles >38µm		ASTM D7647	>40	<b>1</b>	---	2
Particles >71µm		ASTM D7647	>10	<b>0</b>	---	2
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>19/15/12</b>	---	16/14/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	<b>1.05</b>	0.87	0.97



# OIL ANALYSIS REPORT

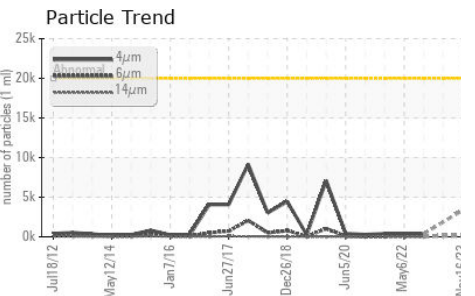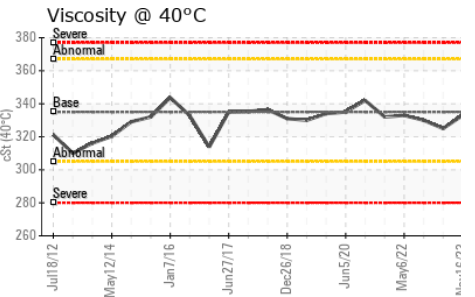
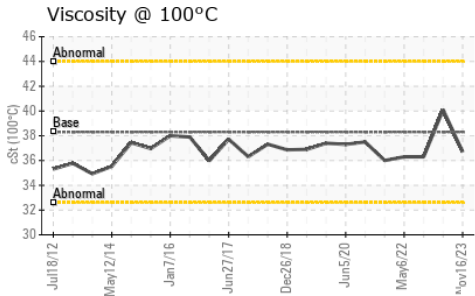
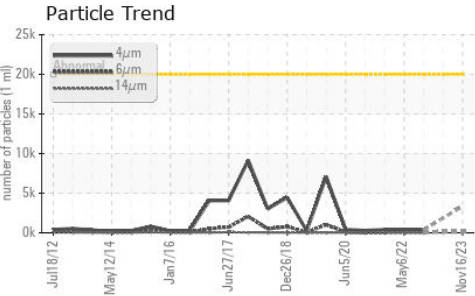
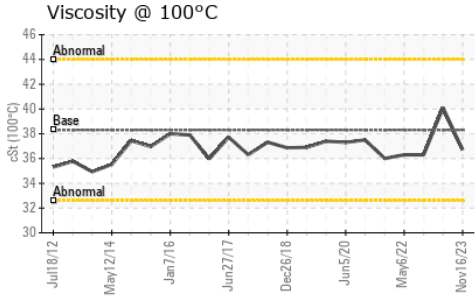


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	335	330	325
Visc @ 100°C	cSt	ASTM D445	38.3	36.7	40.1
Viscosity Index (VI)	Scale	ASTM D2270	164	157	176

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

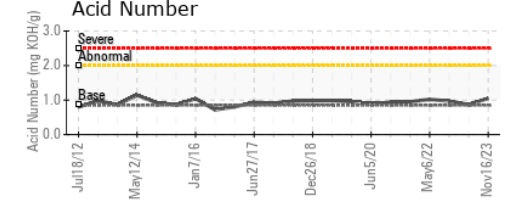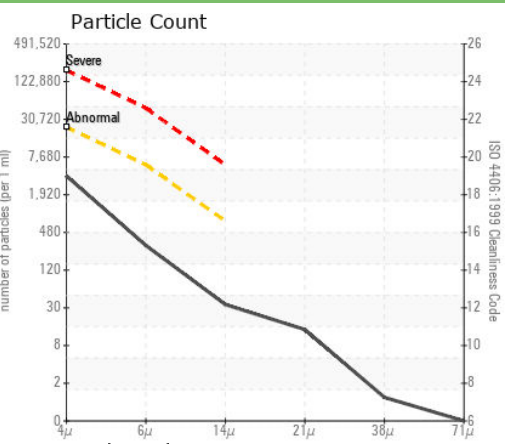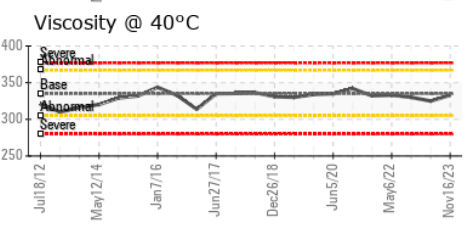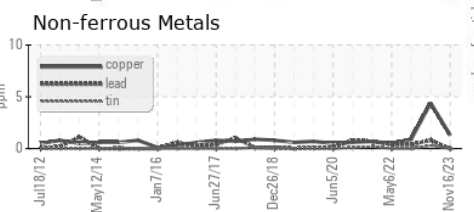

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0807466 **Received** : 24 Apr 2024  
**Lab Number** : 06159099 **Tested** : 26 Apr 2024  
**Unique Number** : 10994522 **Diagnosed** : 26 Apr 2024 - Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: KV100, VI )

**JPHYTEC**

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JP  
 Contact: Service

T:  
F: