


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id

IZ/8WM
Component
Gearbox

MOBIL MOBILGEAR SHC XMP 320 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

L)		ul2012 Jun	2014 Dec2015 Jun20	7 Dec2018 Aug2020 May2	022 Feb202	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0807463	WC0807371	WC0695216
Sample Date		Client Info		16 Feb 2024	01 Jun 2023	25 Jan 2023
Machine Age	mths	Client Info		0	0	115078
Oil Age	mths	Client Info		0	45	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	27	20	21
Chromium	ppm	ASTM D5185m	>15	0	0	<1
Nickel	ppm	ASTM D5185m	>15	0	1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>100	0	<1	<1
Copper	ppm	ASTM D5185m	>200	1	0	<1
Tin	ppm	ASTM D5185m	>25	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		<1	2	<1
Calcium	ppm	ASTM D5185m	0	0	1	0
Phosphorus	ppm	ASTM D5185m	485	424	440	400
Zinc	ppm	ASTM D5185m	0	16	0	14
Sulfur	ppm	ASTM D5185m		5388	4580	4147
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	6	8	9
Sodium	ppm	ASTM D5185m	>15	0	0	<1
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water	%	ASTM D6304		NEG	NEG	NEG
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	1713	338	1092
Particles >6μm		ASTM D7647	>5000	285	111	255
Particles >14µm		ASTM D7647	>640	14	10	24
Particles >21µm		ASTM D7647		3	4	6
Particles >38µm		ASTM D7647	>40	0	0	1
Particles >71μm		ASTM D7647	>10	0	0	1
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/15/11	16/14/10	17/15/12
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	1.12	0.95	0.95



OIL ANALYSIS REPORT

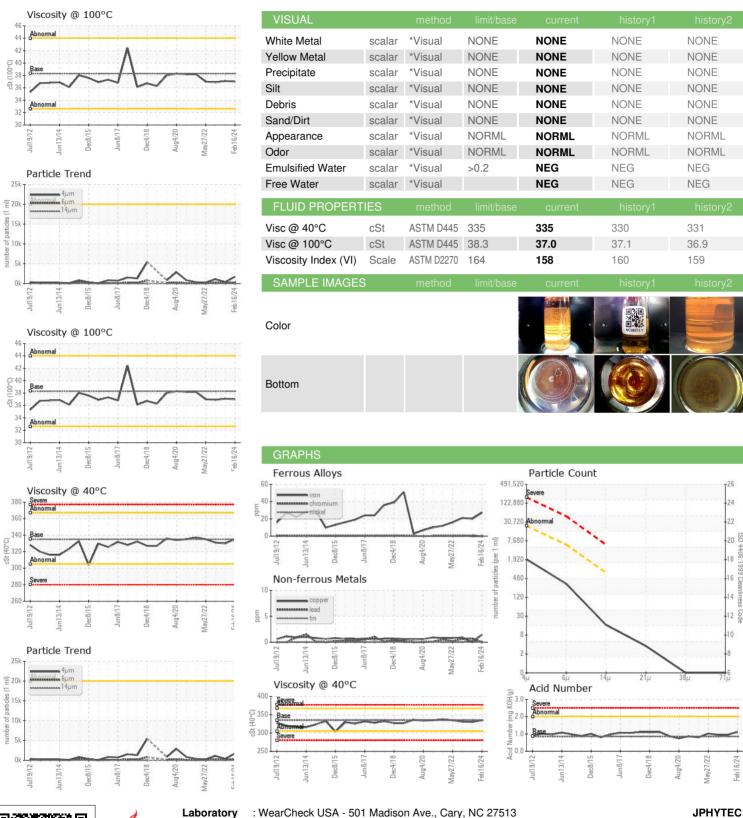





Certificate 12367

Laboratory Sample No.

: WC0807463 Lab Number : 06159102

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Unique Number : 10994525 Diagnosed Test Package : PLANT (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: 24 Apr 2024

: 26 Apr 2024

: 26 Apr 2024 - Jonathan Hester

Contact/Location: Service ? - JPHYTEC

Contact: Service

JΡ

T:

F: