




OIL ANALYSIS REPORT

Sample Rating Trend

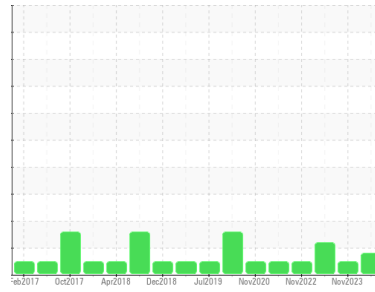

WEAR



Machine Id
VAC 1178580-1 P2 W-BTTM (S/N C7314)
 Component
Pump
 Fluid
USPI VAC 100 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Elemental data confirmed.

Wear

An increase in the iron level is noted.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	USPM36810	USPM31306	USPM27373
Sample Date	Client Info	23 Apr 2024	18 Nov 2023	13 Jul 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		MARGINAL	NORMAL	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >90	▲ 79	0	25
Chromium ppm	ASTM D5185m >5	<1	0	0
Nickel ppm	ASTM D5185m >5	<1	0	0
Titanium ppm	ASTM D5185m >3	<1	0	<1
Silver ppm	ASTM D5185m >3	0	0	0
Aluminum ppm	ASTM D5185m >7	2	<1	1
Lead ppm	ASTM D5185m >12	<1	0	0
Copper ppm	ASTM D5185m >30	1	0	<1
Tin ppm	ASTM D5185m >9	<1	<1	0
Vanadium ppm	ASTM D5185m	<1	0	<1
Cadmium ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 0	3	<1	0
Barium ppm	ASTM D5185m 0	0	0	0
Molybdenum ppm	ASTM D5185m 0	<1	0	0
Manganese ppm	ASTM D5185m	<1	0	<1
Magnesium ppm	ASTM D5185m 0	<1	0	0
Calcium ppm	ASTM D5185m 0	5	1	1
Phosphorus ppm	ASTM D5185m 1800	1127	1104	● 742
Zinc ppm	ASTM D5185m 0	14	0	9
Sulfur ppm	ASTM D5185m 0	587	68	● 706

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >60	6	5	3
Sodium ppm	ASTM D5185m	14	0	3
Potassium ppm	ASTM D5185m >20	1	0	2
Water %	ASTM D6304 >.1	0.031	0.029	0.034
ppm Water	ASTM D6304 >1000	316	299.4	349.7

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	1942	1325	750
Particles >6µm	ASTM D7647 >1300	608	378	181
Particles >14µm	ASTM D7647 >160	45	34	6
Particles >21µm	ASTM D7647 >40	10	8	1
Particles >38µm	ASTM D7647 >10	0	0	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	18/16/13	18/16/12	17/15/10

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.05	0.19	0.18	0.21



OIL ANALYSIS REPORT

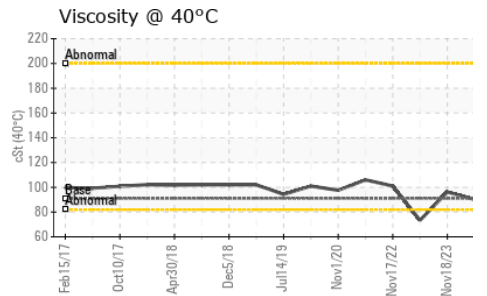
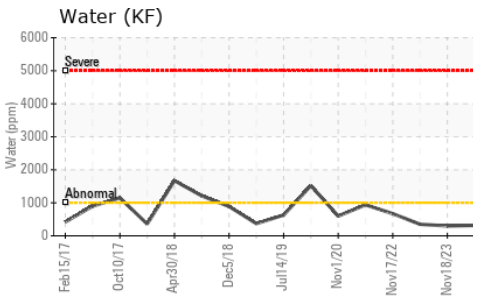
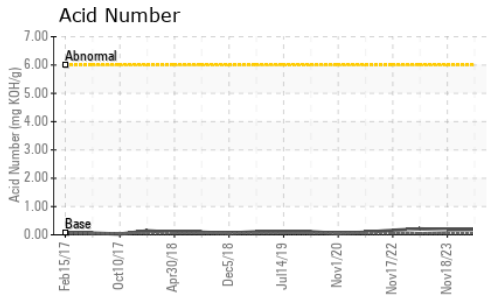
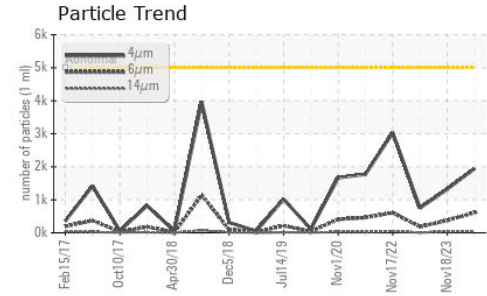
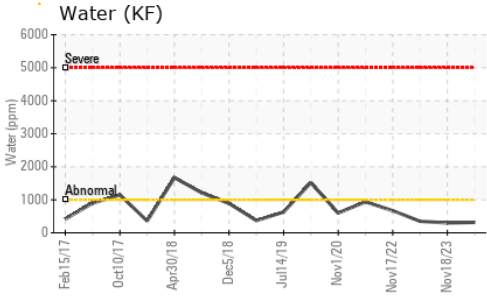


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 91	90.16	96.2	73.35

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

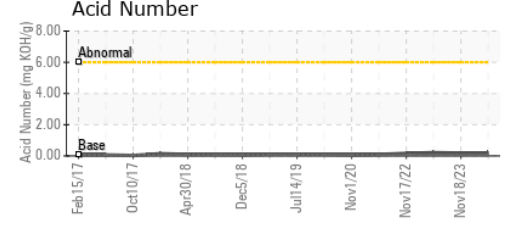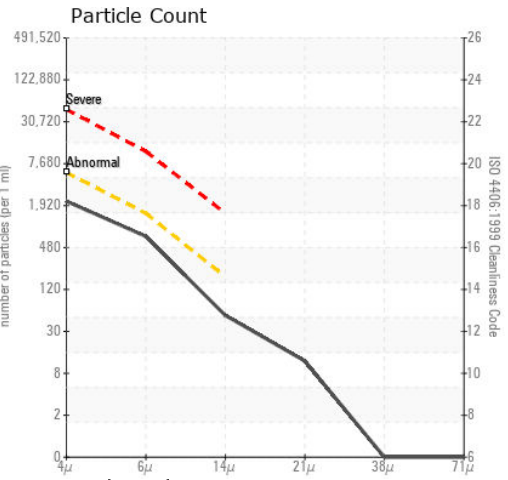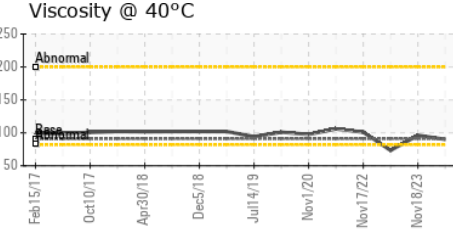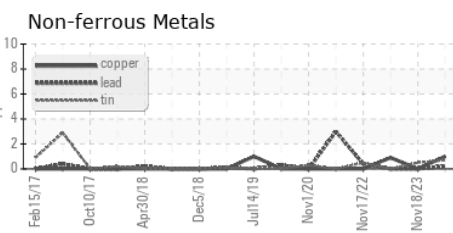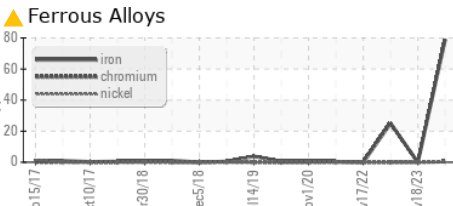

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM36810 **Received** : 24 Apr 2024
Lab Number : 06159156 **Tested** : 29 Apr 2024
Unique Number : 10994579 **Diagnosed** : 29 Apr 2024 - Doug Bogart
Test Package : IND 2

JBS - BEARDSTOWN
 8295 ARENZVILLE RD
 BEARDSTOWN, IL
 US 62618
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)