




OIL ANALYSIS REPORT

Sample Rating Trend

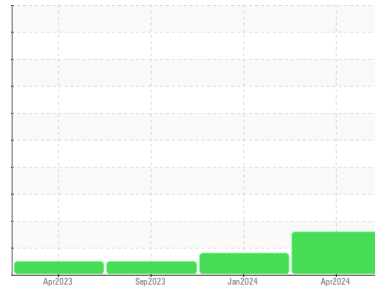

WEAR



Area

ULTRA COOLANT

Machine Id

CBV580705 - SMS TECH SERV

Component

Compressor

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

▲ Wear

The iron level is abnormal. The lead level is abnormal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		UCH06159252	UCH06068592	UCH05957716
Sample Date	Client Info		17 Apr 2024	05 Jan 2024	12 Sep 2023
Machine Age	hrs	Client Info	26251	25023	23396
Oil Age	hrs	Client Info	4730	0	1875
Oil Changed	Client Info		Not Changed	Not Changd	Not Changed
Sample Status			ABNORMAL	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	▲ 92	71	15
Chromium	ppm	ASTM D5185m >10	1	0	<1
Nickel	ppm	ASTM D5185m	1	0	<1
Titanium	ppm	ASTM D5185m	2	1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	<1	0
Lead	ppm	ASTM D5185m >25	▲ 53	<1	<1
Copper	ppm	ASTM D5185m >50	7	6	5
Tin	ppm	ASTM D5185m >15	<1	1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 500	751	738	663
Molybdenum	ppm	ASTM D5185m 0	<1	0	<1
Manganese	ppm	ASTM D5185m	16	12	2
Magnesium	ppm	ASTM D5185m 0	2	2	<1
Calcium	ppm	ASTM D5185m 0	12	7	8
Phosphorus	ppm	ASTM D5185m 20	2	2	3
Zinc	ppm	ASTM D5185m 0	21	13	36
Sulfur	ppm	ASTM D5185m 200	365	376	396

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	12	8	3
Sodium	ppm	ASTM D5185m	64	51	56
Potassium	ppm	ASTM D5185m >20	5	4	3


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.20	0.144	0.183




OIL ANALYSIS REPORT


▲ Non-ferrous Metals

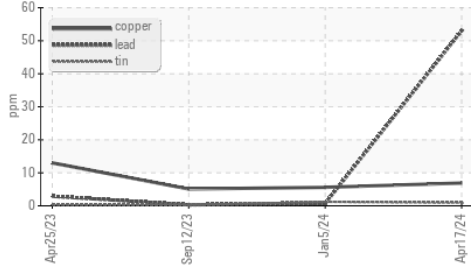


▲ Ferrous Alloys

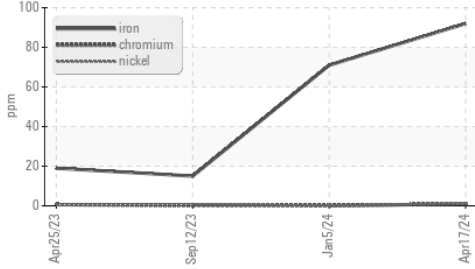

Acid Number

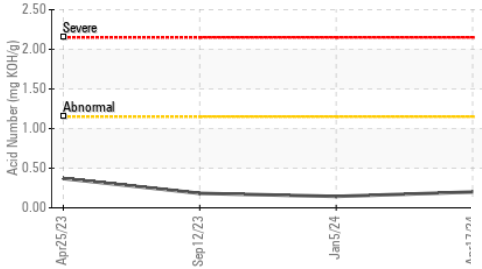


Viscosity @ 40°C

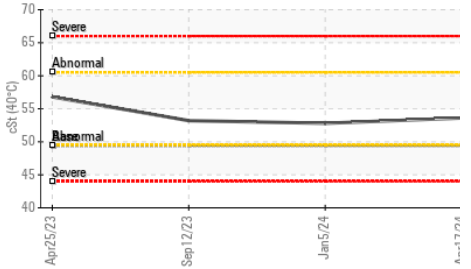

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.4	53.6	52.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

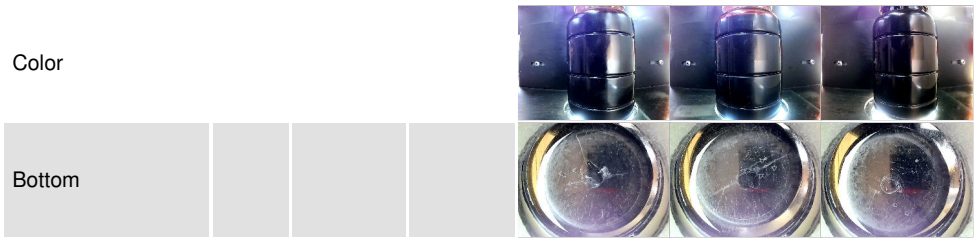


GRAPHS


▲ Ferrous Alloys

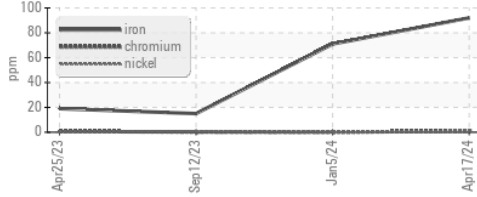


▲ Non-ferrous Metals

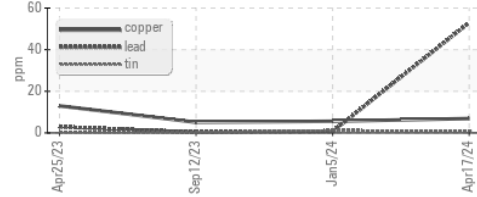

Viscosity @ 40°C

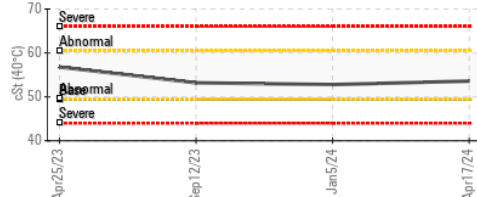

Acid Number

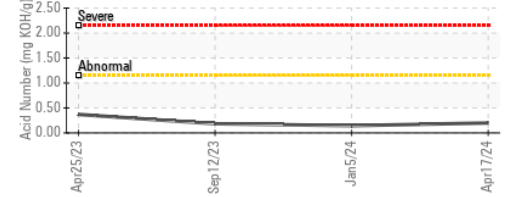

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCH06159252 **Received** : 24 Apr 2024
Lab Number : 06159252 **Tested** : 25 Apr 2024
Unique Number : 10994675 **Diagnosed** : 26 Apr 2024 - Jonathan Hester
Test Package : IND 2

A-L-L EQUIPMENT INC
 204 38TH ST
 MOLINE, IL
 US 61265
 Contact: KEVIN DESPOT
 kevind@a-l-equipment.com
 T: (815)877-7000
 F: (309)762-9950

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)