




# OIL ANALYSIS REPORT

Sample Rating Trend

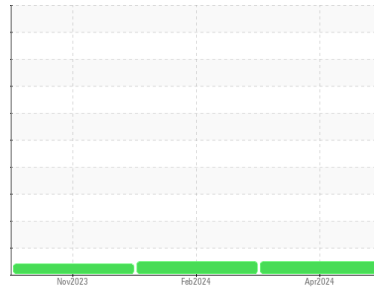

**NORMAL**



Area

**MINING**

Machine Id

**ME-56 SHUTTLEWAGON SW-25 52513026A**

Component

**Front Differential**

Fluid

**CAT TDTO SAE 50 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0910926</b>	WC0909657	WC0866105
Sample Date	Client Info			<b>15 Apr 2024</b>	28 Feb 2024	01 Nov 2023
Machine Age	hrs	Client Info		<b>10300</b>	10894	0
Oil Age	hrs	Client Info		<b>1500</b>	1000	500
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>76</b>	14	16
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m	>25	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>100	<b>0</b>	<1	4
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>5</b>	1	1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>32</b>	28	23
Calcium	ppm	ASTM D5185m	2980	<b>2953</b>	2828	2817
Phosphorus	ppm	ASTM D5185m	1100	<b>1097</b>	1085	899
Zinc	ppm	ASTM D5185m	1270	<b>1265</b>	1255	1191
Sulfur	ppm	ASTM D5185m		<b>9594</b>	8850	5832

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>9</b>	9	5
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



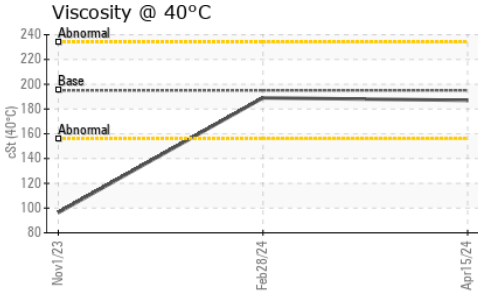


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	187	189	96.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

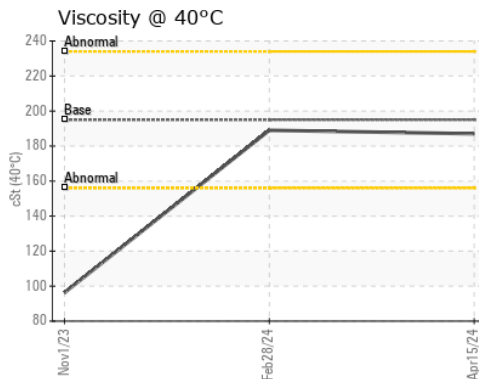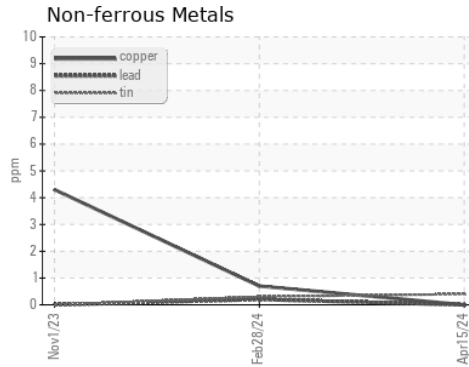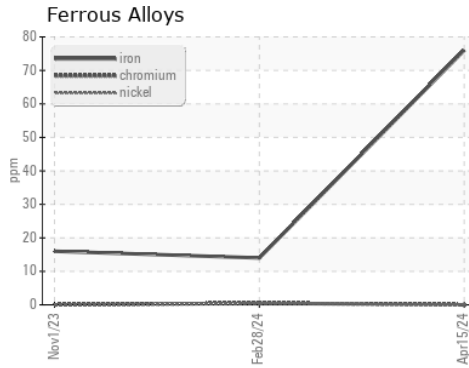

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0910926      **Received** : 24 Apr 2024  
**Lab Number** : 06159498      **Tested** : 25 Apr 2024  
**Unique Number** : 10994921      **Diagnosed** : 25 Apr 2024 - Wes Davis  
**Test Package** : CONST

**COVIA - CAMDEN - 094**  
 1700 SAND MILL RD  
 CAMDEN, TN  
 US 38320  
 Contact: TRACY KEE  
 tracy.kee@coviacorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: