

# **OIL ANALYSIS REPORT**

Sample Rating Trend ISO

Machine Id **TOTE 104** 

New (Unused) Oil

{not provided} (--- GAL)

#### Recommendation

This is a baseline read-out on the submitted sample.


### Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

|                  |          |              |            | Apr2024         |          |          |
|------------------|----------|--------------|------------|-----------------|----------|----------|
| SAMPLE INFORM    | MATION   | method       | limit/base | current         | history1 | history2 |
| Sample Number    |          | Client Info  |            | TLC0001643      |          |          |
| Sample Date      |          | Client Info  |            | 19 Apr 2024     |          |          |
| Machine Age      | hrs      | Client Info  |            | 0               |          |          |
| Oil Age          | hrs      | Client Info  |            | 0               |          |          |
| Oil Changed      |          | Client Info  |            | N/A             |          |          |
| Sample Status    |          |              |            | ATTENTION       |          |          |
| WEAR METALS      |          | method       | limit/base | current         | history1 | history2 |
| Iron             | ppm      | ASTM D5185m  | >5         | 0               |          |          |
| Chromium         | ppm      | ASTM D5185m  | >5         | 0               |          |          |
| Nickel           | ppm      | ASTM D5185m  | >5         | 0               |          |          |
| Titanium         | ppm      | ASTM D5185m  |            | 0               |          |          |
| Silver           | ppm      | ASTM D5185m  | >5         | 0               |          |          |
| Aluminum         | ppm      | ASTM D5185m  | >5         | <1              |          |          |
| Lead             | ppm      | ASTM D5185m  | >5         | 0               |          |          |
| Copper           | ppm      | ASTM D5185m  |            | 0               |          |          |
| Tin              | ppm      | ASTM D5185m  | >5         | <1              |          |          |
| Vanadium         | ppm      | ASTM D5185m  |            | 0               |          |          |
| Cadmium          | ppm      | ASTM D5185m  |            | 0               |          |          |
| ADDITIVES        |          | method       | limit/base | current         | history1 | history2 |
| Boron            | ppm      | ASTM D5185m  |            | 75              |          |          |
| Barium           | ppm      | ASTM D5185m  |            | 0               |          |          |
| Molybdenum       | ppm      | ASTM D5185m  |            | 15              |          |          |
| Manganese        | ppm      | ASTM D5185m  |            | 0               |          |          |
| Magnesium        | ppm      | ASTM D5185m  |            | 71              |          |          |
| Calcium          | ppm      | ASTM D5185m  |            | 486             |          |          |
| Phosphorus       | ppm      | ASTM D5185m  |            | 370             |          |          |
| Zinc             | ppm      | ASTM D5185m  |            | 274             |          |          |
| Sulfur           | ppm      | ASTM D5185m  |            | 2573            |          |          |
| CONTAMINANTS     | ;        | method       | limit/base | current         | history1 | history2 |
| Silicon          | ppm      | ASTM D5185m  | >15        | 6               |          |          |
| Sodium           | ppm      | ASTM D5185m  |            | 0               |          |          |
| Potassium        | ppm      | ASTM D5185m  | >20        | 1               |          |          |
| Water            | %        | ASTM D6304   |            | NEG             |          |          |
| FLUID CLEANLIN   | IESS     | method       | limit/base | current         | history1 | history2 |
| Particles >4µm   |          | ASTM D7647   | >5000      | <b>8619</b>     |          |          |
| Particles >6µm   |          | ASTM D7647   | >1300      | 1114            |          |          |
| Particles >14μm  |          | ASTM D7647   | >160       | 21              |          |          |
| Particles >21µm  |          | ASTM D7647   | >40        | 5               |          |          |
| Particles >38µm  |          | ASTM D7647   | >10        | 0               |          |          |
| Particles >71µm  |          | ASTM D7647   | >3         | 0               |          |          |
| Oil Cleanliness  |          | ISO 4406 (c) | >19/17/14  | <b>20/17/12</b> |          |          |
| FLUID DEGRADA    | ATION    | method       | limit/base | current         | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045   |            | 0.750           |          |          |



## **OIL ANALYSIS REPORT**

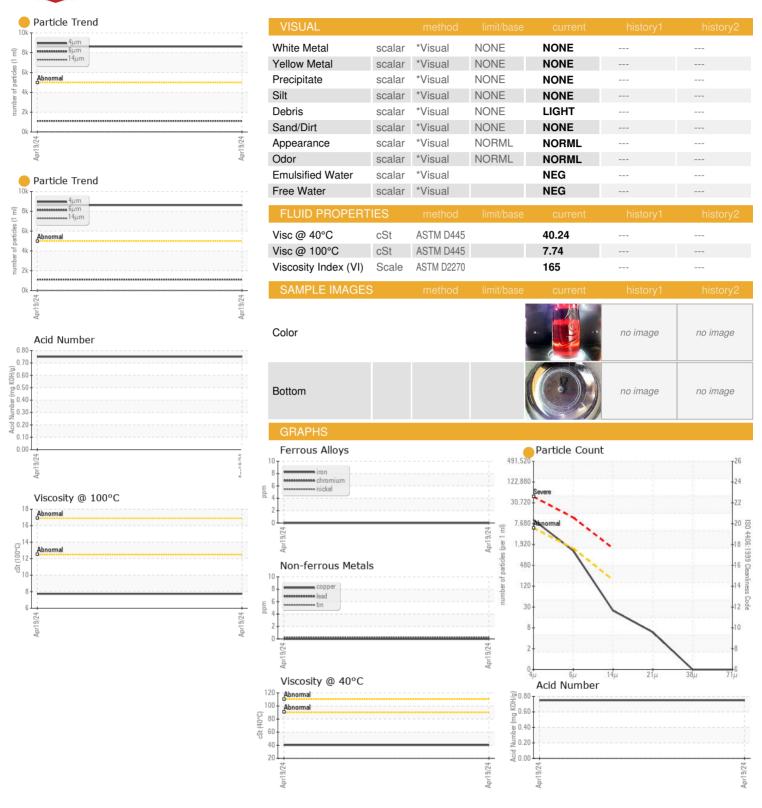



Certificate 12367

Laboratory

Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06159540

: TLC0001643 Unique Number : 10994963

Received **Tested** 

: 24 Apr 2024 : 26 Apr 2024 Diagnosed Test Package: PLANT (Additional Tests: FT-IR, ICP-NewOil, KV100, VI)

: 26 Apr 2024 - Jonathan Hester

Contact: MICHAEL JACKSON mjackson@supplypro1.com T: (470)991-1693

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: SUPATLGA [WUSCAR] 06159540 (Generated: 04/26/2024 12:28:52) Rev: 1

**SUPPLY PRO** 

ATLANTA, GA

US 30354

115 EMPIRE WAY