



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Machine Id  
**TOTE 98**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

### Contamination

There is a high amount of particulates present in the oil.

| SAMPLE INFORMATION | method      | limit/base  | current            | history1 | history2 |
|--------------------|-------------|-------------|--------------------|----------|----------|
| Sample Number      | Client Info |             | <b>TLC0001648</b>  | ---      | ---      |
| Sample Date        | Client Info |             | <b>19 Apr 2024</b> | ---      | ---      |
| Machine Age        | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Age            | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed        | Client Info |             | <b>N/A</b>         | ---      | ---      |
| Sample Status      |             |             | <b>ABNORMAL</b>    | ---      | ---      |

| WEAR METALS | method | limit/base     | current      | history1 | history2 |
|-------------|--------|----------------|--------------|----------|----------|
| Iron        | ppm    | ASTM D5185m >5 | <b>0</b>     | ---      | ---      |
| Chromium    | ppm    | ASTM D5185m >5 | <b>0</b>     | ---      | ---      |
| Nickel      | ppm    | ASTM D5185m >5 | <b>0</b>     | ---      | ---      |
| Titanium    | ppm    | ASTM D5185m    | <b>0</b>     | ---      | ---      |
| Silver      | ppm    | ASTM D5185m >5 | <b>0</b>     | ---      | ---      |
| Aluminum    | ppm    | ASTM D5185m >5 | <b>&lt;1</b> | ---      | ---      |
| Lead        | ppm    | ASTM D5185m >5 | <b>0</b>     | ---      | ---      |
| Copper      | ppm    | ASTM D5185m >5 | <b>0</b>     | ---      | ---      |
| Tin         | ppm    | ASTM D5185m >5 | <b>&lt;1</b> | ---      | ---      |
| Vanadium    | ppm    | ASTM D5185m    | <b>0</b>     | ---      | ---      |
| Cadmium     | ppm    | ASTM D5185m    | <b>0</b>     | ---      | ---      |

| ADDITIVES  | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>27</b>   | ---      | ---      |
| Barium     | ppm    | ASTM D5185m | <b>0</b>    | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m | <b>4</b>    | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m | <b>37</b>   | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m | <b>560</b>  | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m | <b>504</b>  | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m | <b>392</b>  | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m | <b>5961</b> | ---      | ---      |





| CONTAMINANTS | method | limit/base      | current    | history1 | history2 |
|--------------|--------|-----------------|------------|----------|----------|
| Silicon      | ppm    | ASTM D5185m >15 | <b>21</b>  | ---      | ---      |
| Sodium       | ppm    | ASTM D5185m     | <b>0</b>   | ---      | ---      |
| Potassium    | ppm    | ASTM D5185m >20 | <b>3</b>   | ---      | ---      |
| Water        | %      | ASTM D6304      | <b>NEG</b> | ---      | ---      |

| FLUID CLEANLINESS | method       | limit/base | current           | history1 | history2 |
|-------------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm    | ASTM D7647   | >5000      | <b>▲ 170431</b>   | ---      | ---      |
| Particles >6µm    | ASTM D7647   | >1300      | <b>▲ 89790</b>    | ---      | ---      |
| Particles >14µm   | ASTM D7647   | >160       | <b>▲ 3880</b>     | ---      | ---      |
| Particles >21µm   | ASTM D7647   | >40        | <b>▲ 501</b>      | ---      | ---      |
| Particles >38µm   | ASTM D7647   | >10        | <b>9</b>          | ---      | ---      |
| Particles >71µm   | ASTM D7647   | >3         | <b>0</b>          | ---      | ---      |
| Oil Cleanliness   | ISO 4406 (c) | >19/17/14  | <b>▲ 25/24/19</b> | ---      | ---      |

| FLUID DEGRADATION | method   | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | <b>0.74</b> | ---      | ---      |



# OIL ANALYSIS REPORT

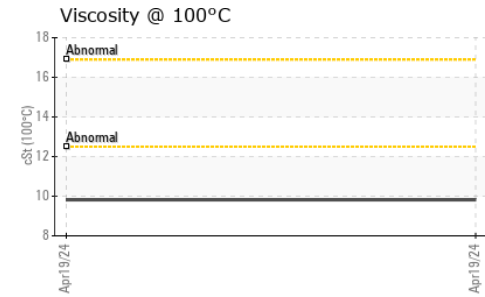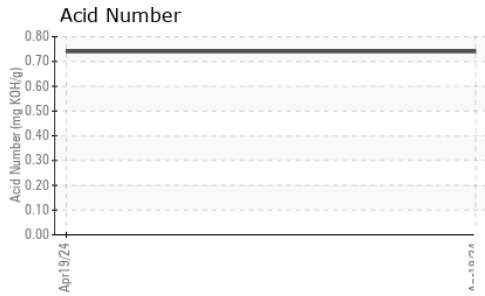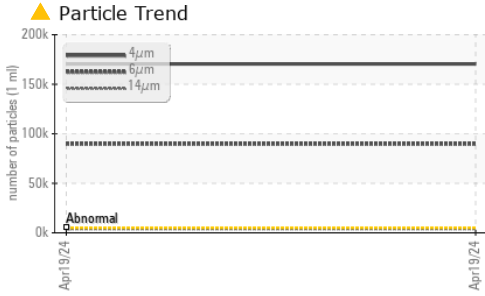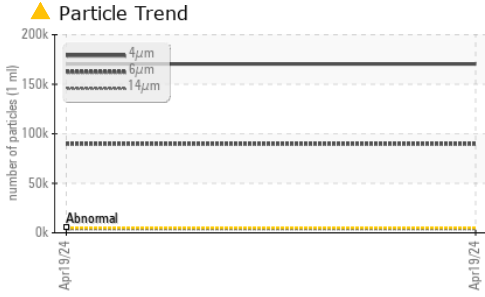





| VISUAL           | method | limit/base | current    | history1     | history2 |
|------------------|--------|------------|------------|--------------|----------|
| White Metal      | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Yellow Metal     | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Precipitate      | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Silt             | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Debris           | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE       | <b>NONE</b>  | ---      |
| Appearance       | scalar | *Visual    | NORML      | <b>NORML</b> | ---      |
| Odor             | scalar | *Visual    | NORML      | <b>NORML</b> | ---      |
| Emulsified Water | scalar | *Visual    | <b>NEG</b> | ---          | ---      |
| Free Water       | scalar | *Visual    | <b>NEG</b> | ---          | ---      |

| FLUID PROPERTIES     | method | limit/base | current      | history1 | history2 |
|----------------------|--------|------------|--------------|----------|----------|
| Visc @ 40°C          | cSt    | ASTM D445  | <b>58.92</b> | ---      | ---      |
| Visc @ 100°C         | cSt    | ASTM D445  | <b>9.82</b>  | ---      | ---      |
| Viscosity Index (VI) | Scale  | ASTM D2270 | <b>152</b>   | ---      | ---      |

## SAMPLE IMAGES

|        | method | limit/base | current | history1 | history2 |
|--------|--------|------------|---------|----------|----------|
| Color  |        |            |         | no image | no image |
| Bottom |        |            |         | no image | no image |

## GRAPHS

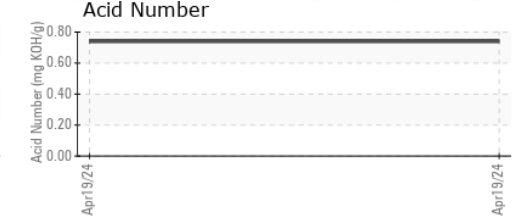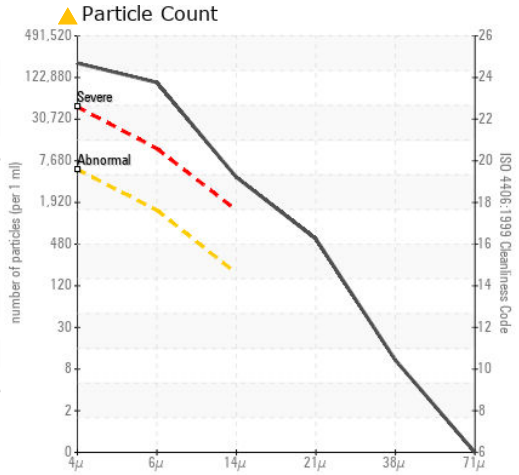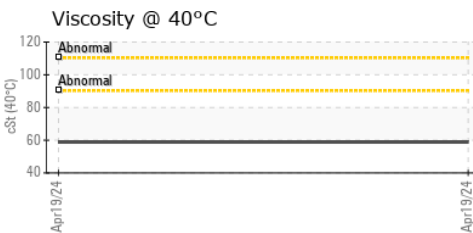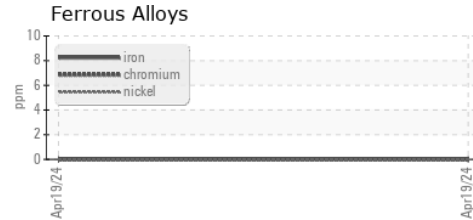

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TLC0001648 **Received** : 24 Apr 2024  
**Lab Number** : **06159545** **Tested** : 26 Apr 2024  
**Unique Number** : 10994968 **Diagnosed** : 26 Apr 2024 - Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: FT-IR, ICP-NewOil, KV100, VI )

**SUPPLY PRO**  
 115 EMPIRE WAY  
 ATLANTA, GA  
 US 30354

Contact: MICHAEL JACKSON  
 mjackson@supplypro1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (470)991-1693

F: