




OIL ANALYSIS REPORT

Sample Rating Trend

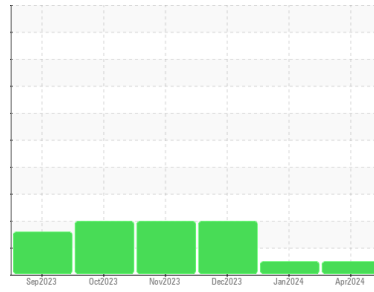

NORMAL



Area

ARIZONA

Machine Id

2321

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0857183	WC0881850	WC0881841
Sample Date	Client Info		01 Apr 2024	02 Jan 2024	05 Dec 2023
Machine Age	hrs	Client Info	940	625	573
Oil Age	hrs	Client Info	250	52	573
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	20	12	37
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >4	6	<1	<1
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	<1	0	<1
Aluminum	ppm	ASTM D5185m >20	4	3	10
Lead	ppm	ASTM D5185m >40	3	1	0
Copper	ppm	ASTM D5185m >330	368	46	146
Tin	ppm	ASTM D5185m >15	<1	2	4
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	107	127	248
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	41	32	117
Manganese	ppm	ASTM D5185m	1	<1	3
Magnesium	ppm	ASTM D5185m 450	765	691	700
Calcium	ppm	ASTM D5185m 3000	1473	1283	1380
Phosphorus	ppm	ASTM D5185m 1150	820	686	661
Zinc	ppm	ASTM D5185m 1350	931	767	797
Sulfur	ppm	ASTM D5185m 4250	3509	2766	2178

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	41	32	▲ 114
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	8	8	24

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	8.8	6.8	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.6	19.3	24.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.5	14.5	22.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	7.7	8.3	7.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

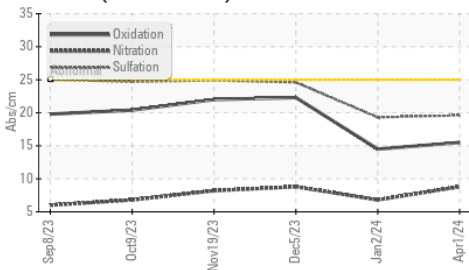

Base Number

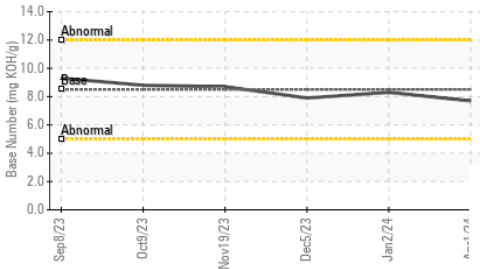

Viscosity @ 100°C

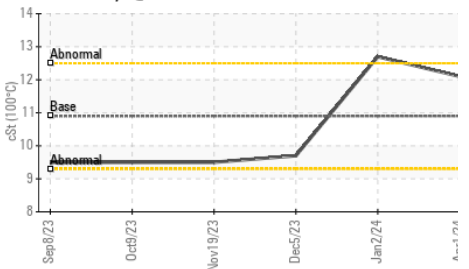


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	12.1	12.7

GRAPHS


Ferrous Alloys

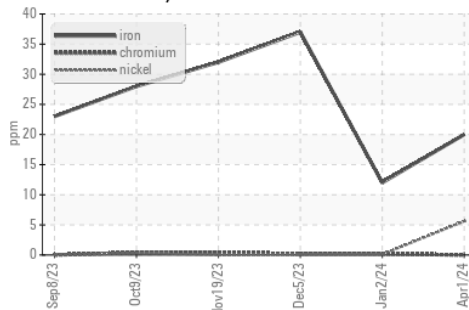


Non-ferrous Metals

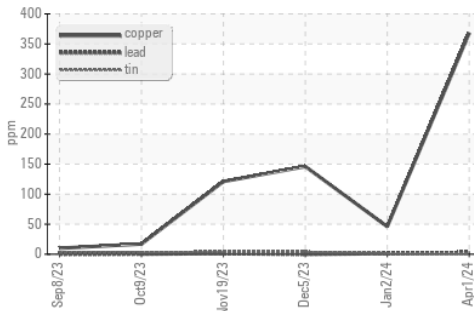

Viscosity @ 100°C

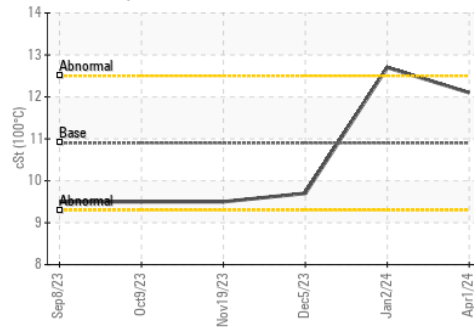

Base Number

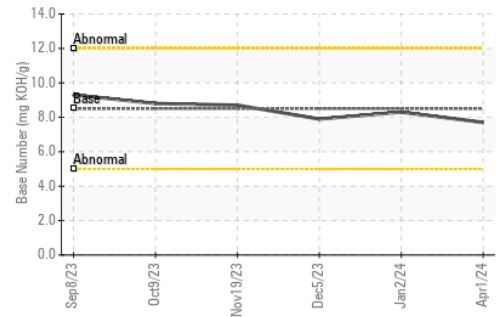

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0857183

Lab Number : 06159690

Unique Number : 10995113

Test Package : FLEET

Received : 24 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 26 Apr 2024 - Sean Felton

LIBERTY DISPOSAL

6401 S EASTERN AVE

OKLAHOMA CITY, OK

US 73149

Contact: CARRIE MARSHALL

c.marshall@ldi89.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)