




OIL ANALYSIS REPORT

Sample Rating Trend

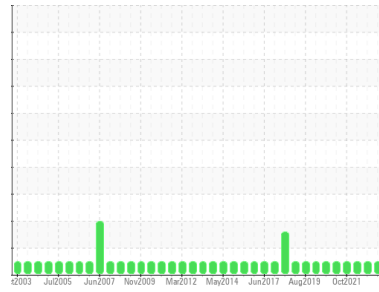

NORMAL



Machine Id
MACHINE 425
 Component
Hydraulic System
 Fluid
NOCO NOCOLUBE AW 46 (138 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0886754	WC0847485	WC0677783
Sample Date	Client Info	05 Apr 2024	26 Sep 2023	28 May 2022
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	Not Changd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>40	1	3	2
Chromium	ppm	ASTM D5185m	>4	<1	0	0
Nickel	ppm	ASTM D5185m	>20	1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>4	2	0	0
Lead	ppm	ASTM D5185m	>10	1	0	<1
Copper	ppm	ASTM D5185m	>60	4	4	3
Tin	ppm	ASTM D5185m	>4	1	0	0
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		2	<1	<1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		4	4	3
Calcium	ppm	ASTM D5185m	40	52	51	49
Phosphorus	ppm	ASTM D5185m	250	296	318	308
Zinc	ppm	ASTM D5185m	310	346	389	343
Sulfur	ppm	ASTM D5185m	2540	3703	3936	3193

CONTAMINANTS




method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	3	2	1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	0

FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>10000	800	2123	2428
Particles >6µm	ASTM D7647	>1300	198	677	572
Particles >14µm	ASTM D7647	>160	16	47	69
Particles >21µm	ASTM D7647	>40	5	14	17
Particles >38µm	ASTM D7647	>10	0	0	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>20/17/14	17/15/11	18/17/13	18/16/13



OIL ANALYSIS REPORT

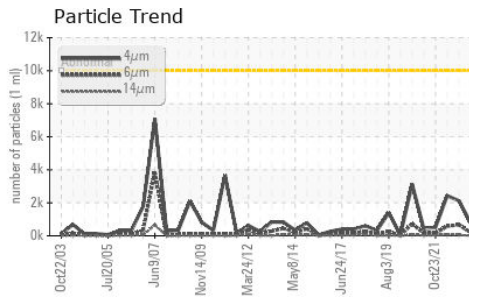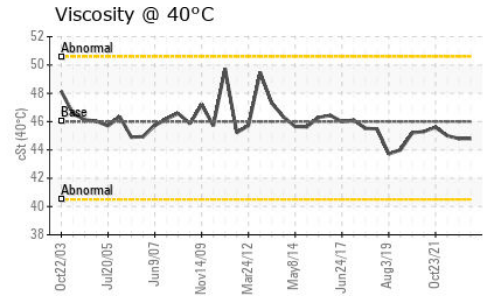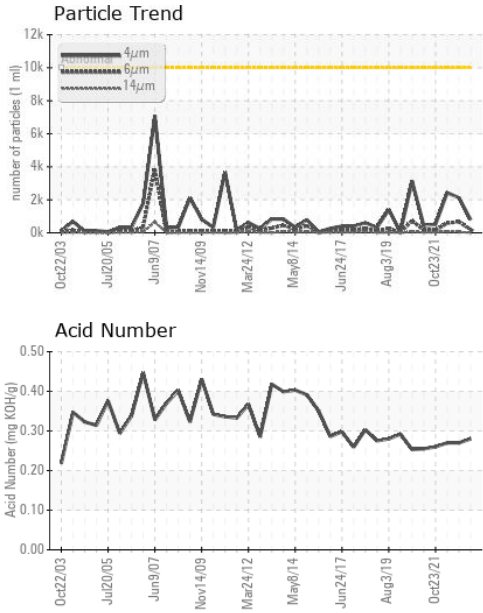


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.28	0.27	0.27






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.0	44.8	44.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

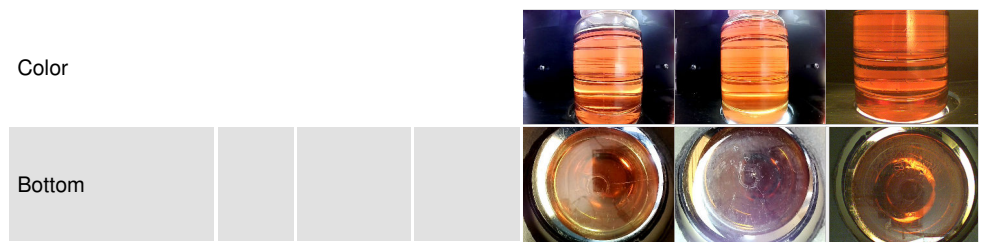

GRAPHS

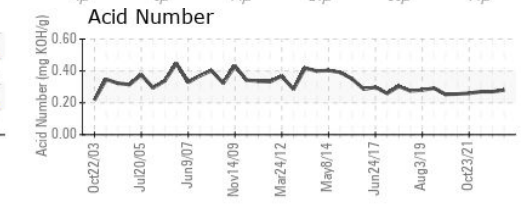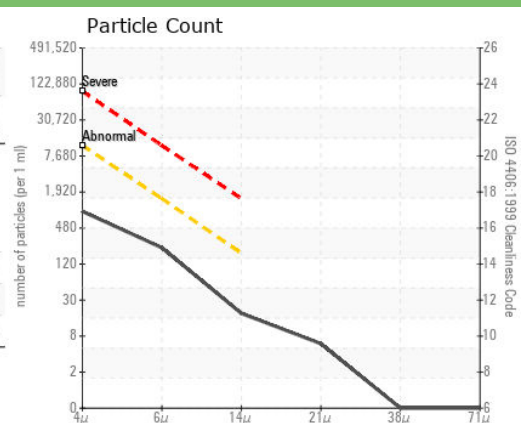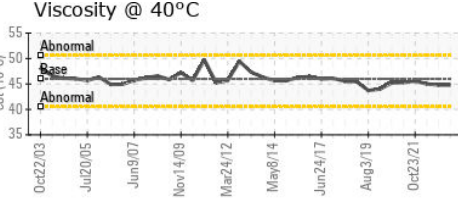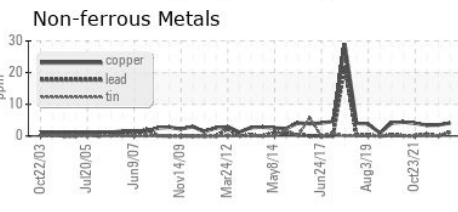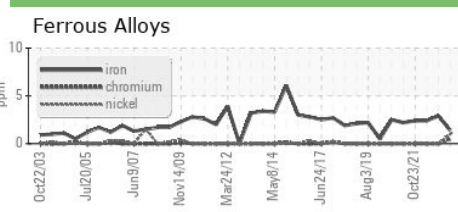

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0886754
Lab Number : 06159778
Unique Number : 10995201
Test Package : IND 2

Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 26 Apr 2024 - Don Baldrige

ALLIANCE PRECISION PLASTICS
 1220 LEE RD
 ROCHESTER, NY
 US 14606
 Contact: RON ORT
 rort@allianceppc.com
 T:
 F: (716)425-7251