

OIL ANALYSIS REPORT

Machine Id BOBSP 7304 Component Hydraulic System Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

1 C C C 1	1.1.2.1											
20030202	1000301									21		
										1		
5 1 1 1 5	1.1.2.1									1	_	
1000000	1.1.1.1.1.1											
	1.1.1.1.1									1		
1 1 1 1 1	1.1.1.1.1											
inconcercio.	nonnen m									nin -		
5 T T T 5	1.1.1.1.1											
de la la la la la la la	THE R. LEWIS											
										de la compañía de la		
										1		
11111												
										1		
	1.1.1.1.1										V	
										1.1		
	1.1.1.1									1		
5.00										1		
		- 1 - 1								-		
		1 A A			100							
2014 Nov201	6 Apr2017	Sep2017	Jul2018	Nov2018	May20	19 Oct	2019	Mar20	20 Ar	r20		
									/4			

ISO

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0001401	PTK0000389	PTK0001140
Sample Date		Client Info		19 Apr 2024	09 Nov 2023	18 May 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	ABNORMAL
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	18	15	7
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>10	2	0	0
Lead	ppm	ASTM D5185m	>10	1	0	<1
Copper	ppm	ASTM D5185m	>75	2	1	2
Tin	ppm	ASTM D5185m	>10	1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	1
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		1	0	0
Manganese	ppm	ASTM D5185m		1	0	<1
Magnesium	ppm	ASTM D5185m		2	0	2
Calcium	ppm	ASTM D5185m		11	4	6
Phosphorus	ppm	ASTM D5185m		284	283	263
Zinc	ppm	ASTM D5185m		19	14	13
Sulfur	ppm	ASTM D5185m		15506	13981	12058
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5	2	1
Sodium	ppm	ASTM D5185m		0	1	<1
Potassium	ppm	ASTM D5185m	>20	1	0	<1
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		31209	1513	39560
Particles >6µm		ASTM D7647	>2500	<u> </u>	451	6 414
Particles >14µm		ASTM D7647	>320	75	51	97
Particles >21µm		ASTM D7647	>80	20	21	20
Particles >38µm		ASTM D7647	>20	1	3	1

ASTM D7647 >4

ISO 4406 (c) >18/15

Particles >71µm

Oil Cleanliness

0

19/13

1

16/13

0

▲ 22/20/14



200

lu128/

Jul28/7

0.80 0.70 (B/H0J K0H/d) 0.50 0.40 0.30

0.10

160

140

120

cSt (40°C) 08 (40°C)

60 Abnorma

20

Jul28/14

Acid Number

Nov4/16

Nov4/16 Apr12/17 Sep13/17

Jul28/

200k In 150k 100k 100k 50k

Particle Trend

number of particles (1 ml) 1001 Particle Trend

Apr12/17 Sep13/17

Sep 13/17

Sep13/17

Apr12/1

Viscosity @ 40°C

Mav8/19

/lav8/19

w14/18


×14/18



FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.65	0.57	0.556
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		149	149	145
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



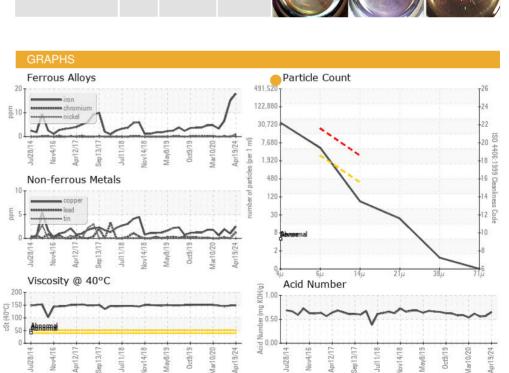



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: GRAELK [WUSCAR] 06159781 (Generated: 04/26/2024 11:47:47) Rev: 1

Contact/Location: TONY HILDY - GRAELK

Page 2 of 2

F:

Apr19/24

ar10/20

ar10/20

Bottom