

## **OIL ANALYSIS REPORT**

Machine Id KAESER SFC 55T 5183038 (S/N 1015)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear


All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

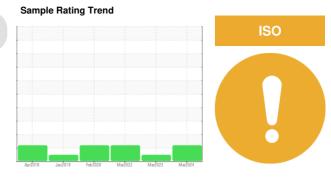


			11 14 1		1.1	11-1-0
SAMPLE INFORM	ΊΑΠΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015030	KCPA001406	KCP43666
Sample Date		Client Info		28 Mar 2024	31 Mar 2023	22 Mar 2022
Machine Age	hrs	Client Info		17485	15472	12968
Oil Age	hrs	Client Info		0	0	2442
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ATTENTION	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1
Lead	ppm	ASTM D5185m	>10	1	0	0
Copper	ppm	ASTM D5185m	>50	6	5	7
Tin	ppm	ASTM D5185m	>10	1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
			0	0	0	<1
Boron	ppm	ASTM D5185m ASTM D5185m	90	u <1	0	< 1
Barium	ppm			1	0	0
Molybdenum	ppm	ASTM D5185m ASTM D5185m	0	। <1	0	<1
Manganese Magnesium	ppm	ASTM D5185m	100	2	0	24
Calcium	ppm	ASTM D5185m	0	3	0	0
	ppm	ASTM D5185m	0	2	0	4
Phosphorus Zinc	ppm ppm	ASTM D5185m	0	4	0	4
Sulfur		ASTM D5185m	23500	4 22262	22465	16501
	ppm			-		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2	0	<1
Sodium	ppm	ASTM D5185m		0	0	10
Potassium	ppm	ASTM D5185m		2	0	2
Water	%	ASTM D6304		0.009	0.007	0.005
ppm Water	ppm	ASTM D6304	>500	91	77.5	57.8
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4878	2340	9015
Particles >6µm		ASTM D7647	>1300	<mark> </mark> 1360	548	2188
Particles >14µm		ASTM D7647	>80	<mark> </mark> 86	35	<u> </u>
Particles >21µm		ASTM D7647	>20	20	8	<u>▲</u> 66
Particles >38µm		ASTM D7647	>4	0	0	2
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>e</b> 19/18/14	18/16/12	<b>1</b> 8/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.51	0.47	0.46


Acid Number (AN) mg KOH/g ASTM D8045 1.0 Report Id: MEUGOL [WUSCAR] 06159790 (Generated: 04/26/2024 11:50:58) Rev: 1


0.47 0.51


Contact/Location: Service Manager - MEUGOL



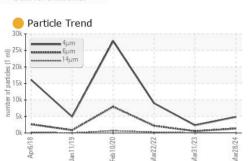

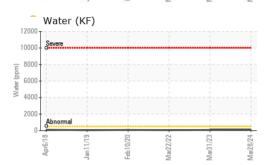








ñ

# **OIL ANALYSIS REPORT**

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.1	49.4	49.3
SAMPLE IMAGES	8	method	limit/base	current	history1	history2
Color						
Bottom					$(\bigcirc)$	

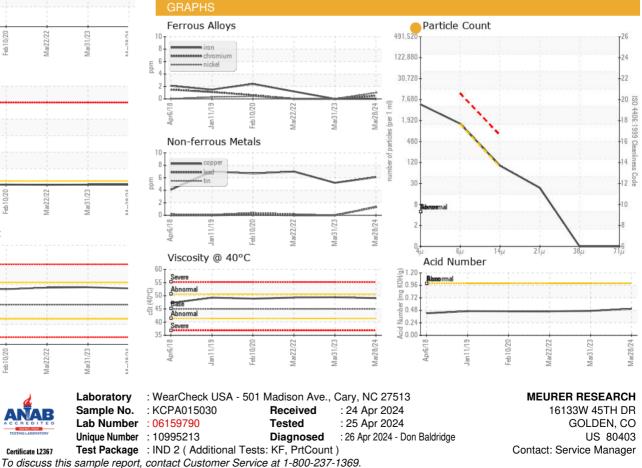

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MEUGOL [WUSCAR] 06159790 (Generated: 04/26/2024 11:50:58) Rev: 1

Certificate 12367

Contact/Location: Service Manager - MEUGOL

T:

F: