


OIL ANALYSIS REPORT

Sample Rating Trend

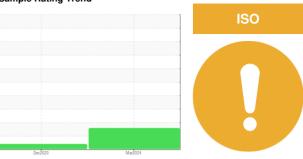

Machine Id

KAESER SK 15 6105969 (S/N 1036)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Dec2020	Mar2024		
CAMPLE INCOR	AATION		1221/1	a company	la fact a consider	la la tarre O
SAMPLE INFORM	MATION	method	limit/base		history1	history2
Sample Number		Client Info		KCPA015220	KCP29763	
Sample Date		Client Info		05 Mar 2024	15 Dec 2020	
Machine Age	hrs	Client Info		16099	5241	
Oil Age	hrs	Client Info		0	1747	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ATTENTION	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	<1	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	0	
Aluminum	ppm	ASTM D5185m	>10	2	0	
Lead	ppm	ASTM D5185m	>10	1	<1	
Copper	ppm	ASTM D5185m	>50	5	10	
Tin	ppm	ASTM D5185m	>10	1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		1	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		0	27	
Calcium	ppm	ASTM D5185m		3	0	
Phosphorus	ppm	ASTM D5185m	500	5	3	
Zinc	ppm	ASTM D5185m		0	35	
Sulfur	ppm	ASTM D5185m		2858	16265	
CONTAMINANTS	}	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	
Sodium	ppm	ASTM D5185m		0	11	
Potassium	ppm	ASTM D5185m	>20	1	1	
Water	%	ASTM D6304	>0.05	0.007	0.015	
ppm Water	ppm	ASTM D6304	>500	78	157.1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8587	3699	
Particles >6µm		ASTM D7647	>1300	2092	1375	
Particles >14µm		ASTM D7647	>80	89	76	
Particles >21µm		ASTM D7647	>20	<u>24</u>	19	
Particles >38µm		ASTM D7647	>4	1	3	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/18/14	18/13	
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

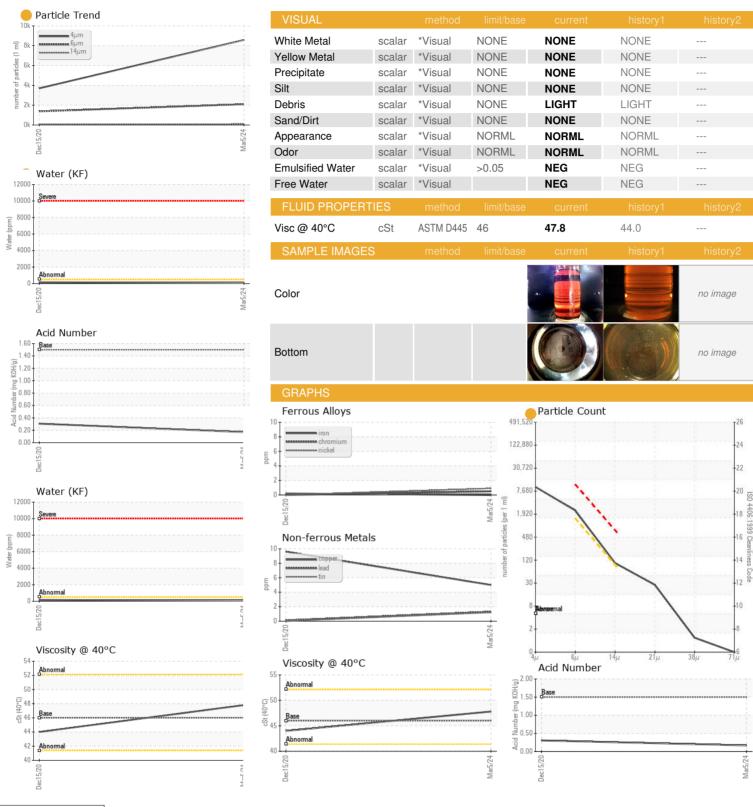





Certificate 12367

Laboratory Sample No.

: KCPA015220 Lab Number : 06159796 Unique Number : 10995219

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 24 Apr 2024 **Tested** : 25 Apr 2024 Diagnosed : 26 Apr 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

FIFTH GENERATION INC

12101 MOORE RD AUSTIN, TX US 78719

Contact: Service Manager

T: F: