


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



Machine Id

## 5105624 (S/N 1023)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

	$\mathbf{I} \mathbf{\Lambda}$	Gľ	XII	15	
_	-	чι	VС	$\sim$	ı

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jan 2022	Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016153	KCP40907	
Sample Date		Client Info		22 Apr 2024	26 Jan 2022	
Machine Age	hrs	Client Info		25902	19123	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	1	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>2	<1	<1	
Aluminum	ppm	ASTM D5185m	>10	2	<1	
Lead	ppm	ASTM D5185m	>10	1	0	
Copper	ppm	ASTM D5185m	>50	11	6	
Tin	ppm	ASTM D5185m	>10	1	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	<1	0	
Molybdenum	ppm	ASTM D5185m		1	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	90	<1	0	
Calcium	ppm	ASTM D5185m	2	3	0	
Phosphorus	ppm	ASTM D5185m		<1	2	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m		18771	15546	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	
Sodium	ppm	ASTM D5185m		0	<1	
Potassium	ppm	ASTM D5185m	>20	1	0	
Water	%	ASTM D6304	>0.05	0.011	0.006	
ppm Water	ppm	ASTM D6304	>500	115	60.3	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1842		
Particles >6µm		ASTM D7647	>1300	451		
Particles >14µm		ASTM D7647	>80	47		
Particles >21µm		ASTM D7647	>20	15		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.47



## **OIL ANALYSIS REPORT**

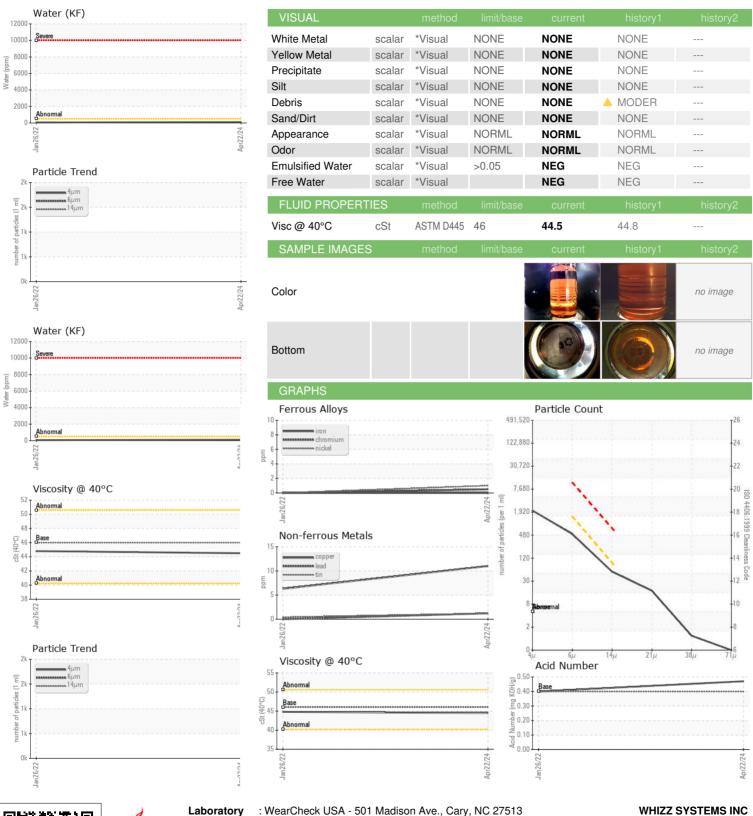





Certificate 12367

Laboratory Sample No.

Lab Number : 06159797 Unique Number : 10995220

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA016153 Received **Tested** 

: 24 Apr 2024 : 25 Apr 2024 Diagnosed Test Package : IND 2 ( Additional Tests: KF, PrtCount )

: 26 Apr 2024 - Don Baldridge

Contact: A/P whizz-ap@whizzsystems.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 95054

T:

F:

3240 SCOTT BLVD

SANTA CLARA, CA