




# OIL ANALYSIS REPORT

Sample Rating Trend

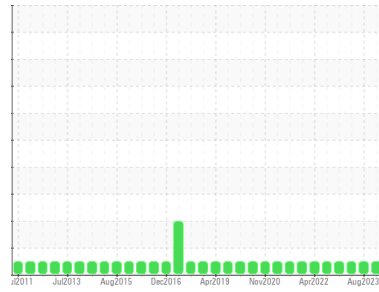

**NORMAL**



Machine Id  
**CAPACITY 0808114**  
 Component  
**Rear Transmission (Auto)**  
 Fluid  
**CASTROL TRANSYND (20 PNT)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0748603</b>	WC0748558	WC0748545
Sample Date	Client Info		<b>17 Apr 2024</b>	30 Aug 2023	30 Mar 2023
Machine Age	hrs	Client Info	<b>20316</b>	19595	19004
Oil Age	hrs	Client Info	<b>1312</b>	591	1172
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>12</b>	7	10
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >50	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m >50	<b>3</b>	<1	0
Copper	ppm	ASTM D5185m >225	<b>9</b>	4	7
Tin	ppm	ASTM D5185m >10	<b>2</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 133	<b>86</b>	77	85
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>1</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 0	<b>2</b>	0	3
Calcium	ppm	ASTM D5185m 27	<b>127</b>	122	143
Phosphorus	ppm	ASTM D5185m 293	<b>223</b>	218	241
Zinc	ppm	ASTM D5185m 0	<b>2</b>	0	4
Sulfur	ppm	ASTM D5185m 1050	<b>1750</b>	1859	1852

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	2	2
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



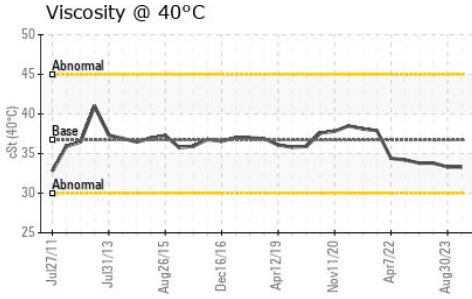


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	36.7	<b>33.3</b>	33.3	33.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

## GRAPHS

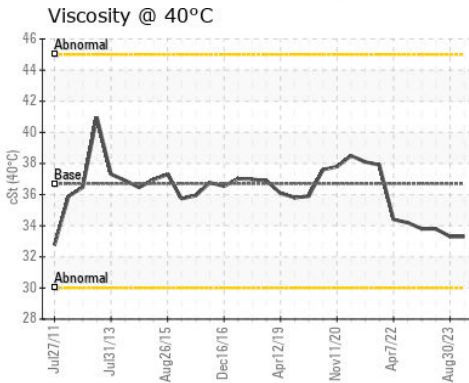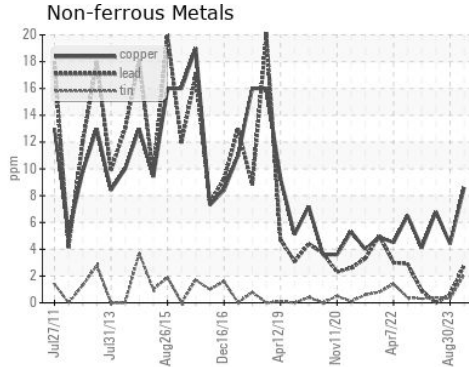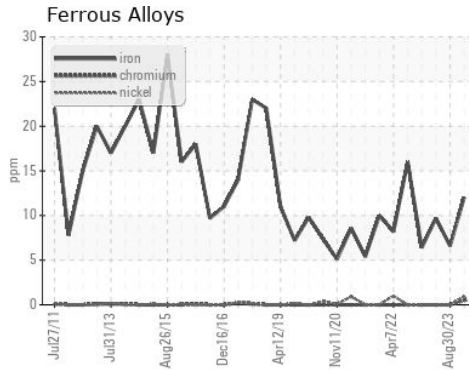

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0748603  
**Lab Number** : **06159946**  
**Unique Number** : 10995369  
**Test Package** : FLEET

**Received** : 24 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**DOLE FRESH FRUIT COMPANY**  
 10TH AVENUE MARINE TERMINAL, 850 WATER STREET  
 SAN DIEGO, CA  
 US 92101

Contact: CARLOS RENTERIA  
 carlos.renteria@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (619)615-1723

F: (619)236-0703