




# OIL ANALYSIS REPORT

Sample Rating Trend

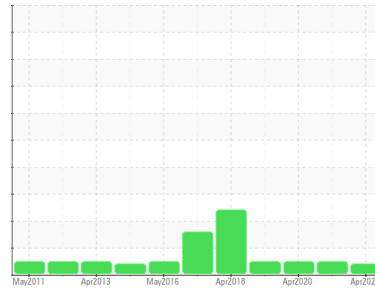

**VIS DEBRIS**



Area  
**[BOSTON MA]**  
 Machine Id  
**ALSTOM 3309**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO UNIVIS N 32 (55 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

High concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0673297</b>	WC0560211	WC0417739
Sample Date	Client Info		<b>13 Apr 2024</b>	17 Apr 2023	22 Apr 2020
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>2</b>	1	2
Chromium	ppm	ASTM D5185m >10	<b>4</b>	4	4
Nickel	ppm	ASTM D5185m >10	<b>24</b>	29	22
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>10</b>	13	9
Copper	ppm	ASTM D5185m >75	<b>7</b>	8	6
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m .1	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m .3	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>0</b>	<1	1
Calcium	ppm	ASTM D5185m 74	<b>53</b>	46	58
Phosphorus	ppm	ASTM D5185m 266	<b>348</b>	342	338
Zinc	ppm	ASTM D5185m 338	<b>441</b>	436	442
Sulfur	ppm	ASTM D5185m	<b>2959</b>	2921	2459

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>1</b>	1	2
Sodium	ppm	ASTM D5185m	<b>2</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>---</b>	5274	405
Particles >6µm	ASTM D7647	>1300	<b>---</b>	892	131
Particles >14µm	ASTM D7647	>160	<b>---</b>	59	14
Particles >21µm	ASTM D7647	>40	<b>---</b>	16	3
Particles >38µm	ASTM D7647	>10	<b>---</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>---</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>20/17/14	<b>---</b>	20/17/13	16/14/11



# OIL ANALYSIS REPORT

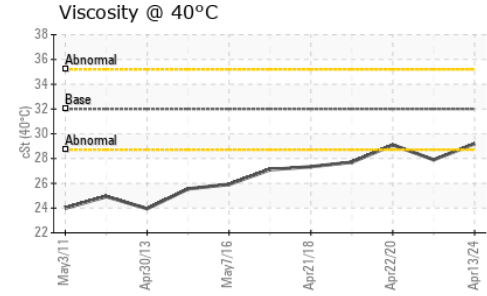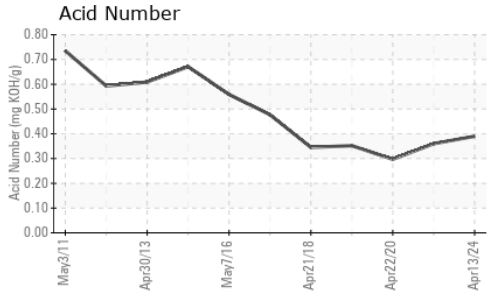


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.39</b>	0.36	0.297





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>▲ HEAVY</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	<b>29.2</b>	27.9	29.1

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

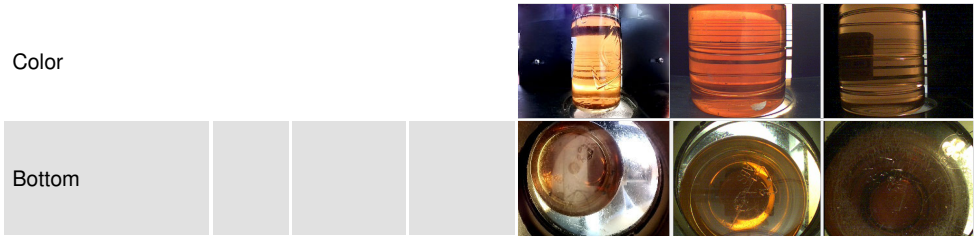

## GRAPHS

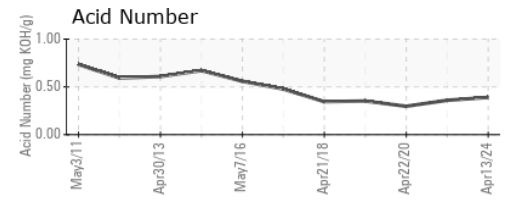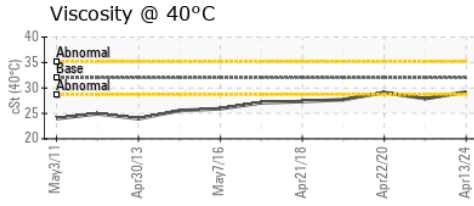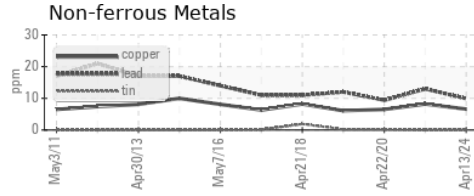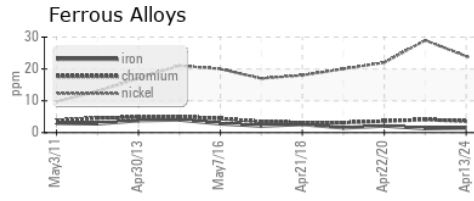

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0673297      **Received** : 25 Apr 2024  
**Lab Number** : **06160321**      **Tested** : 27 Apr 2024  
**Unique Number** : 10995744      **Diagnosed** : 27 Apr 2024 - Don Baldrige  
**Test Package** : MOB 2

**AMTRAK**  
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR  
 WASHINGTON, DC  
 US 20018  
 Contact: MICHAEL PORTER  
 michael.porter@amtrak.com  
 T: (202)870-1399  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)