


# **OIL ANALYSIS REPORT**

Sample Rating Trend



NORMAL



ALSTOM 3304
Component

Component
Front Rear Hydraulic System
Fluid
ESSO UNIVIS N 32 (55 GAL)

### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

# **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		May2011	Apr2013 Apr2015	Apr2019 May2020	Apr2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0667681	WC0560265	WC0381300
Sample Date		Client Info		14 Apr 2024	18 Apr 2021	03 May 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	6	2
Chromium	ppm	ASTM D5185m	>10	7	14	2
Nickel	ppm	ASTM D5185m	>10	32	53	22
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	10	16	10
Copper	ppm	ASTM D5185m	>75	6	14	3
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	.1	0	2	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	.3	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	0	<1	<1	0
Calcium	ppm	ASTM D5185m	74	55	64	56
Phosphorus	ppm	ASTM D5185m	266	345	353	332
Zinc	ppm	ASTM D5185m	338	444	446	436
Sulfur	ppm	ASTM D5185m		2975	3024	3165
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2	2	1
Sodium	ppm	ASTM D5185m		3	5	1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	807		<b>▲</b> 43218
Particles >6µm		ASTM D7647	>1300	155		<b>▲</b> 8904
Particles >14µm		ASTM D7647	>160	13		<u></u> 332
Particles >21µm		ASTM D7647		3		<u>^</u> 70
Particles >38µm		ASTM D7647	>10	0		7
Particles >71µm		ASTM D7647		0		0
Oil Cleanliness		ISO 4406 (c)	>20/17/14	17/14/11		△ 23/20/16




0.00


# OIL ANALYSIS REPORT

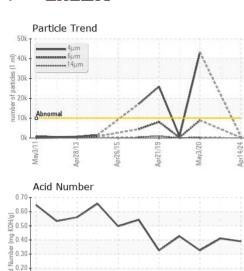

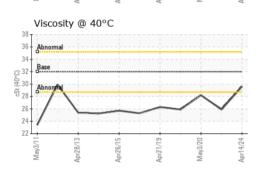





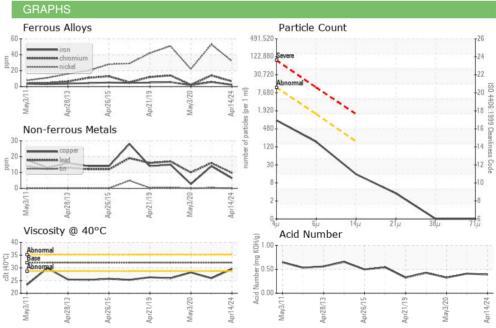





Certificate 12367

Laboratory Sample No. Lab Number : 06160324

: WC0667681 Unique Number : 10995747 Test Package : MOB 2

**Bottom** 

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Apr 2024 **Tested** 

: 26 Apr 2024 Diagnosed

: 27 Apr 2024 - Don Baldridge

**AMTRAK** 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR WASHINGTON, DC US 20018

Contact: MICHAEL PORTER michael.porter@amtrak.com T: (202)870-1399

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)