


OIL ANALYSIS REPORT

[BOSTON MA]

3555

Hydraulic System

ESSO UNIVIS N 32 (55 GAL)

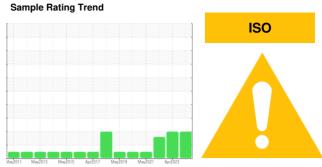

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Mw/2011 Mw/2013 Mw/2015 Ap/2017 Mw/2019 Mw/2021 Apr/2023								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		WC0798835	WC0673370	WC0592264		
Sample Date		Client Info		22 Apr 2024	23 Apr 2023	22 Apr 2022		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2		
Water		WC Method	>0.1	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	1	1	2		
Chromium	ppm	ASTM D5185m	>10	1	1	<1		
Nickel	ppm	ASTM D5185m	>10	25	23	16		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m		0	0	0		
Aluminum	ppm	ASTM D5185m	>10	0	0	0		
Lead	ppm	ASTM D5185m	>10	9	10	7		
Copper	ppm	ASTM D5185m	>75	5	6	4		
Tin	ppm	ASTM D5185m	>10	0	<1	<1		
Antimony	ppm	ASTM D5185m						
Vanadium	ppm	ASTM D5185m		0	0	0		
o								
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES	ppm	ASTM D5185m method	limit/base	0 current	0 history1	0 history2		
ADDITIVES	ppm		limit/base					
ADDITIVES Boron		method		current	history1	history2		
ADDITIVES Boron Barium	ppm	method ASTM D5185m		current 0	history1	history2 <1		
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm	method ASTM D5185m ASTM D5185m	.1	current 0 0	history1 0 0	history2 <1 0		
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	.1	current 0 0 0	history1 0 0 0	history2 <1 0 0		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	.1	current 0 0 0 0	history1 0 0 0 0	history2 <1 0 0 0		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm	method ASTM D5185m	.3	0 0 0 0 0 0 0 50 328	history1 0 0 0 0 0 <1 52 331	history2 <1 0 0 0 0 51 335		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 .0 74	current 0 0 0 0 0 0 50	history1 0 0 0 0 0 <1 52	history2 <1 0 0 0 0 51		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 0 74 266	0 0 0 0 0 0 0 50 328	history1 0 0 0 0 0 <1 52 331	history2 <1 0 0 0 0 51 335		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 0 74 266	0 0 0 0 0 0 0 50 328 415	history1 0 0 0 0 0 <1 52 331 450	history2 <1 0 0 0 0 51 335 408		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 0 74 266 338	Current 0 0 0 0 0 0 50 328 415 2996 Current	history1 0 0 0 0 0 <1 52 331 450 2850 history1	history2 <1 0 0 0 0 51 335 408 2199 history2 0		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 0 74 266 338	Current 0 0 0 0 0 0 50 328 415 2996 Current	history1 0 0 0 0 <1 52 331 450 2850 history1	history2 <1 0 0 0 0 51 335 408 2199 history2		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 .0 .74 .266 .338 limit/base >20	Current 0 0 0 0 0 0 50 328 415 2996 Current	history1 0 0 0 0 0 <1 52 331 450 2850 history1	history2 <1 0 0 0 0 51 335 408 2199 history2 0		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m	.1 .3 .0 .74 .266 .338	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current	history1 0 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1	history2 <1 0 0 0 0 51 335 408 2199 history2 0 0 history2		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m method ASTM D5185m	.1 .3 .0 .74 .266 .338	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current ▲ 23911	history1 0 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1 history1 △11967	history2 <1 0 0 0 0 51 335 408 2199 history2 0 0 history2 44802		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	.1 .3 .74 .266 .338 limit/base >20 .10000 >1300	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current △ 23911 △ 5872	history1 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1 history1 △ 11967 △ 3146	history2 <1 0 0 0 0 51 335 408 2199 history2 0 0 0 history2 ▲ 44802 ▲ 8532		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m method ASTM D5185m ASTM D7647 ASTM D7647	.1 .3 .0 .74 .266 .338 limit/base >20 >20 limit/base >10000 >1300 >160	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current ▲ 23911 ▲ 5872 ▲ 426	history1 0 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1 history1 △ 11967 △ 3146 △ 182	history2 <1 0 0 0 51 335 408 2199 history2 0 0 0 history2 ▲ 44802 ▲ 8532 ▲ 527		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	.1 .3 .0 .74 .266 .338 limit/base >20 >20 limit/base >10000 >1300 >160 >40	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current △ 23911 △ 5872 △ 426 △ 122	history1 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1 history1 △ 11967 △ 3146	history2 <1 0 0 0 0 51 335 408 2199 history2 0 0 0 history2 ▲ 44802 ▲ 8532		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m method ASTM D5185m ASTM D7647 ASTM D7647	.1 .3 .0 .74 .266 .338 limit/base >20 >20 limit/base >10000 >1300 >160	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current ▲ 23911 ▲ 5872 ▲ 426	history1 0 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1 history1 △ 11967 △ 3146 △ 182 △ 49 6	history2 <1 0 0 0 0 51 335 408 2199 history2 0 0 0 history2 ▲ 44802 ▲ 8532 ▲ 527 ▲ 150 6		
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	.1 .3 .74 .266 .338 limit/base >20 .20 .10000 .1300 .160 .240 .>10	current 0 0 0 0 0 50 328 415 2996 current 1 2 0 current △ 23911 △ 5872 △ 426 △ 122	history1 0 0 0 0 0 <1 52 331 450 2850 history1 1 0 <1 history1 △ 11967 △ 3146 △ 182 △ 49	history2 <1 0 0 0 0 51 335 408 2199 history2 0 0 0 history2 44802 44802 527 150		




OIL ANALYSIS REPORT

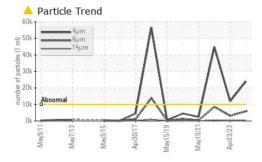




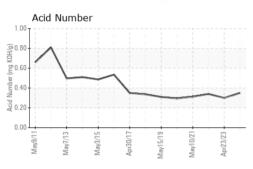



FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.30	0.34
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	29.9	29.9	30.8
SAMPLE IMAGES		method	limit/base	current	history1	history2

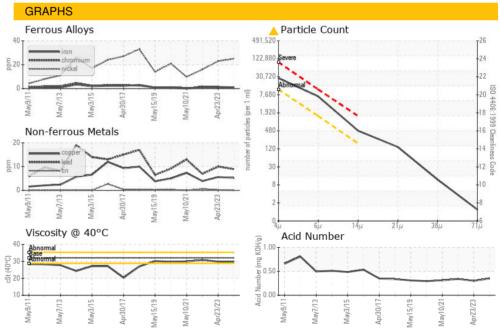





Laboratory Sample No.

Lab Number : 06160327

: WC0798835 Unique Number : 10995750

Color

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Tested Diagnosed

: 25 Apr 2024 : 26 Apr 2024 : 27 Apr 2024 - Don Baldridge

AMTRAK 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR WASHINGTON, DC US 20018

Contact: MICHAEL PORTER michael.porter@amtrak.com T: (202)870-1399

Test Package : MOB 2 Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: AMTRAK [WUSCAR] 06160327 (Generated: 04/27/2024 10:03:20) Rev: 1

Contact/Location: MICHAEL PORTER - AMTRAK