




OIL ANALYSIS REPORT

Sample Rating Trend

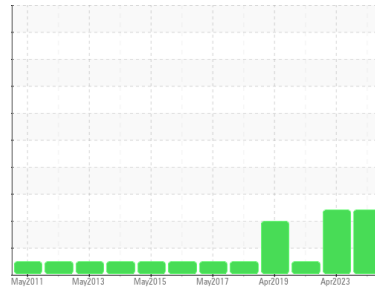

ISO



Machine Id
ALSTOM COACH CAR 3514
 Component
Hydraulic System
 Fluid
ESSO UNIVIS N 32 (55 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0798841	WC0673361	WC0417733
Sample Date	Client Info		19 Apr 2024	22 Apr 2023	25 Apr 2020
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	2	3	2
Chromium	ppm	ASTM D5185m >10	4	4	4
Nickel	ppm	ASTM D5185m >10	41	22	32
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	0	0
Lead	ppm	ASTM D5185m >10	12	13	12
Copper	ppm	ASTM D5185m >75	4	7	4
Tin	ppm	ASTM D5185m >10	0	0	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m .1	0	0	<1
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m .3	0	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m 0	<1	2	<1
Calcium	ppm	ASTM D5185m 74	53	60	56
Phosphorus	ppm	ASTM D5185m 266	342	347	331
Zinc	ppm	ASTM D5185m 338	435	470	431
Sulfur	ppm	ASTM D5185m	3564	3414	2698

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	1	1	2
Sodium	ppm	ASTM D5185m	2	<1	<1
Potassium	ppm	ASTM D5185m >20	<1	<1	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 26653	▲ 88651	505
Particles >6µm	ASTM D7647	>1300	▲ 6687	▲ 30291	131
Particles >14µm	ASTM D7647	>160	▲ 380	▲ 2656	13
Particles >21µm	ASTM D7647	>40	▲ 96	▲ 608	4
Particles >38µm	ASTM D7647	>10	▲ 11	▲ 46	0
Particles >71µm	ASTM D7647	>3	1	1	0
Oil Cleanliness	ISO 4406 (c)	>20/17/14	▲ 22/20/16	▲ 24/22/19	16/14/11



OIL ANALYSIS REPORT

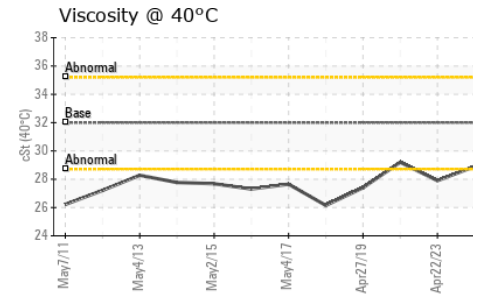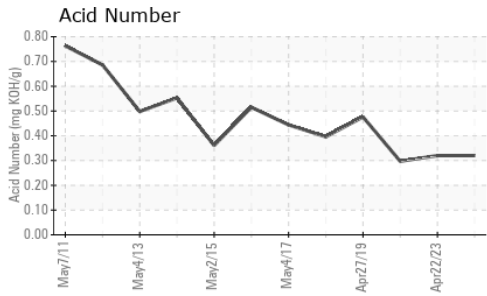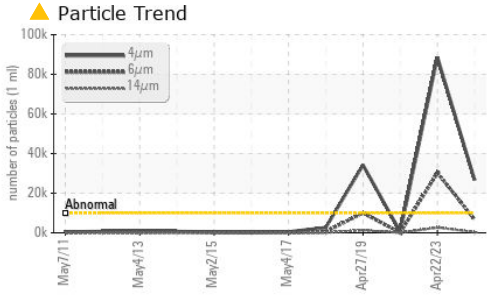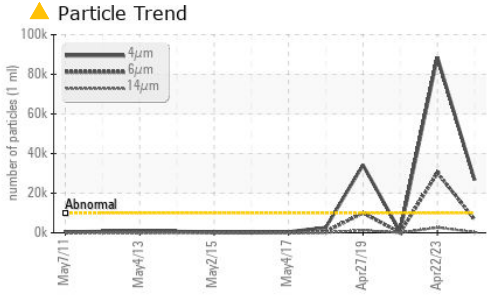


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32	0.32	0.297





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	28.9	27.9	29.2

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

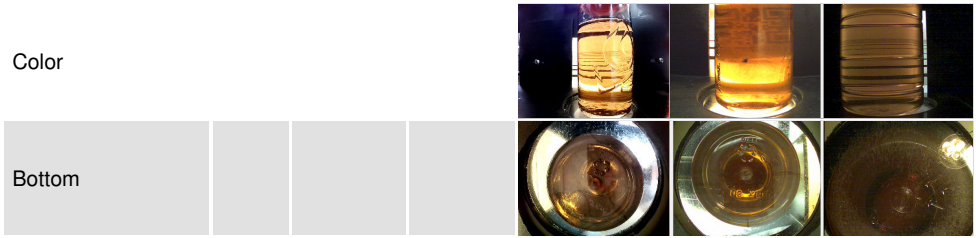

GRAPHS

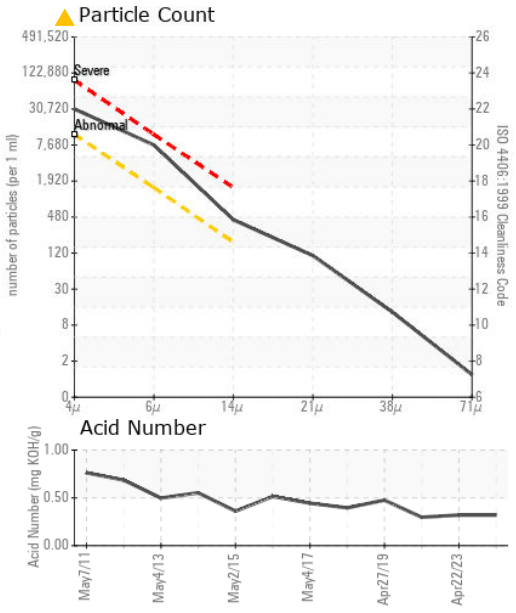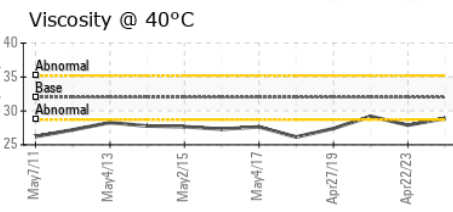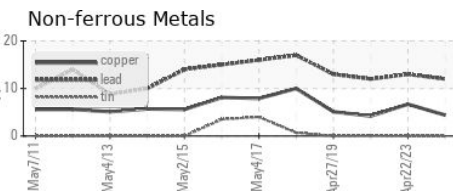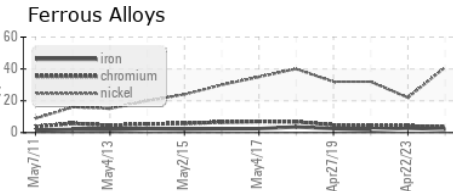

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0798841 **Received** : 25 Apr 2024
Lab Number : 06160328 **Tested** : 26 Apr 2024
Unique Number : 10995751 **Diagnosed** : 27 Apr 2024 - Don Baldrige
Test Package : MOB 2

AMTRAK
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR
 WASHINGTON, DC
 US 20018
 Contact: MICHAEL PORTER
 michael.porter@amtrak.com
 T: (202)870-1399
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)