

Machine Id
QUINCY UTY305530 - ENNIS PAINT
 Component
Compressor
 Fluid
QUINCY QUINSYN (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO50001850	TO50001845	QUC0000377
Sample Date	Client Info			27 Mar 2024	27 Nov 2023	25 Mar 2023
Machine Age	hrs	Client Info		12193	11430	9775
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Changed	Not Changd	N/A
Sample Status				ATTENTION	NORMAL	SEVERE

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	3	1	4
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	15	17	15
Lead	ppm	ASTM D5185m	>25	0	0	<1
Copper	ppm	ASTM D5185m	>50	8	0	4
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	1	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		146	156	151
Zinc	ppm	ASTM D5185m		131	111	119
Sulfur	ppm	ASTM D5185m		552	524	819

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	<1	1
Sodium	ppm	ASTM D5185m		4	5	6
Potassium	ppm	ASTM D5185m	>20	1	3	2
Water	%	ASTM D6304	>0.1	0.014	0.007	▲ 1.77
ppm Water	ppm	ASTM D6304	>1000	144	74	▲ 17700

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	● 18450	1159	▲ 34619
Particles >6µm		ASTM D7647	>2500	● 4112	259	▲ 9952
Particles >14µm		ASTM D7647	>320	200	36	▲ 564
Particles >21µm		ASTM D7647	>80	43	11	▲ 85
Particles >38µm		ASTM D7647	>20	1	1	6
Particles >71µm		ASTM D7647	>4	0	1	1
Oil Cleanliness		ISO 4406 (c)	>20/18/15	● 21/19/15	17/15/12	▲ 22/20/16

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.10	0.66	0.51	0.39

OIL ANALYSIS REPORT

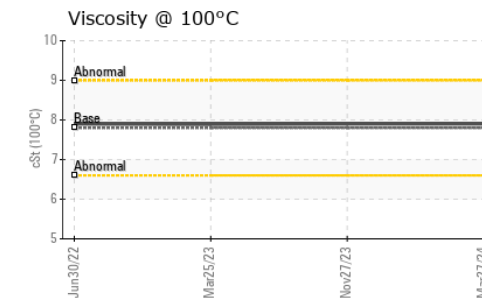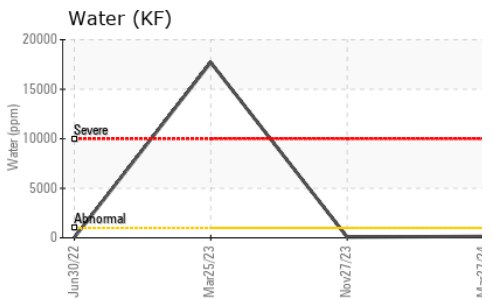
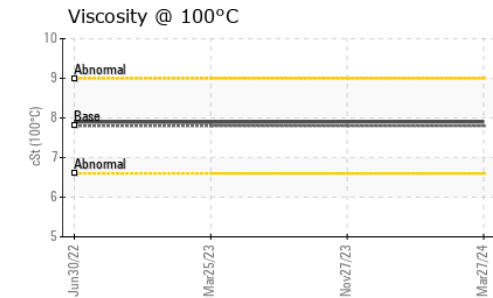
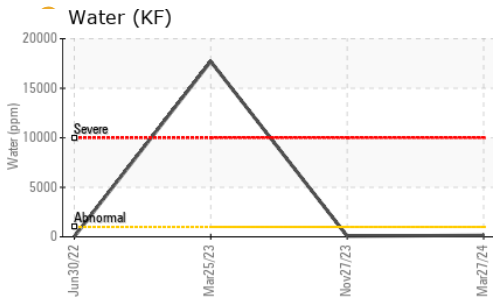
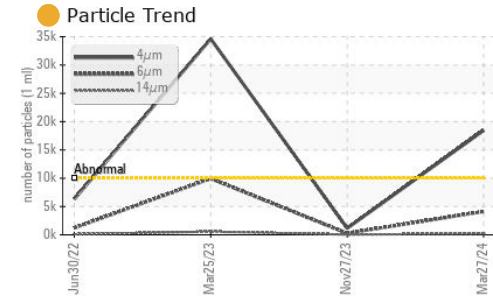


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	▲ 0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.6	46.3	46.0
Visc @ 100°C	cSt	ASTM D445	7.8	7.9	7.89
Viscosity Index (VI)	Scale	ASTM D2270	132	141	142

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

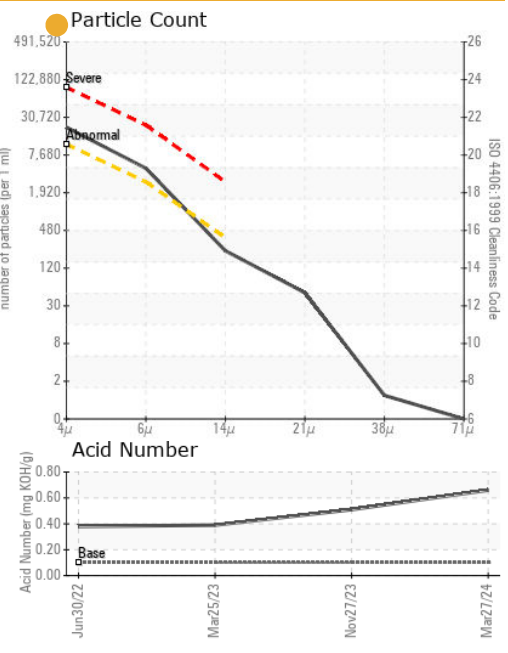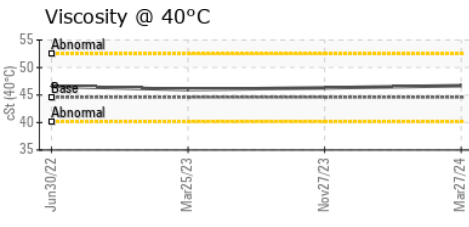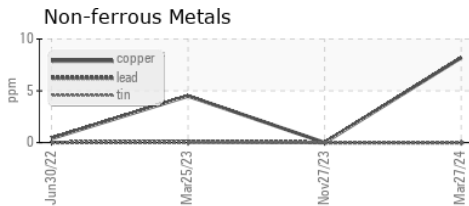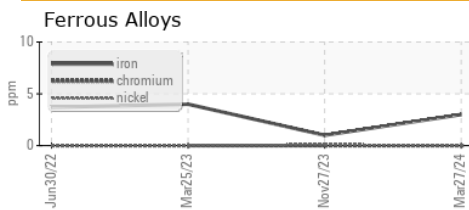

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001850 **Received** : 25 Apr 2024
Lab Number : 06160354 **Tested** : 26 Apr 2024
Unique Number : 10995777 **Diagnosed** : 27 Apr 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

QUALITY COMPRESSOR
 4428 CR 616
 ALVARADO, TX
 US 76009
 Contact: SEAN
 SEAN@QCOMPRESSOR.COM
 T: (817)822-1333
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)