


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

COMP H (S/N M67051)

Air Compressor

USPI MAX FG AIR 46 (--- GAL)

	G۱		

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

uZ018 M _{Ps} Z019 MuZ020 NovZ020 DocZ021 NovZ022 SepZ023						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM6160381	USPM30523	USPM29628
Sample Date		Client Info		24 Apr 2024	04 Jan 2024	13 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>40	0	<1	0
Tin	ppm	ASTM D5185m	>5	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	<1	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	0	0	0	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	0	0	0
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	6	2
Sodium	ppm	ASTM D5185m		<1	0	1
Potassium	ppm	ASTM D5185m	>20	<1	<1	3
Water	%	ASTM D6304	>0.6	0.003	0.017	0.006
ppm Water	ppm	ASTM D6304	>6000	39	176	63.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2477		802
Particles >6µm		ASTM D7647	>2500	649		159
Particles >14μm		ASTM D7647	>320	42		13
Particles >21µm		ASTM D7647	>80	12		3
Particles >38μm		ASTM D7647	>20	1		0
Particles >71μm		ASTM D7647	>4	0		0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/17/13		17/14/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A adad Niconala au (ANI)	m = 1/OLI/=	ACTM DODAE	0.10	0.00	0.070	0.000

0.22

mg KOH/g ASTM D8045 0.16


Acid Number (AN)

0.079


0.089





OIL ANALYSIS REPORT

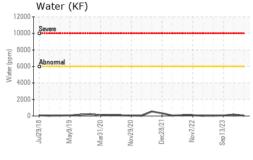


> -
Sep13/23

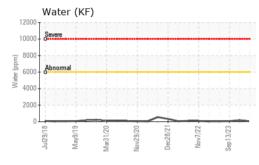







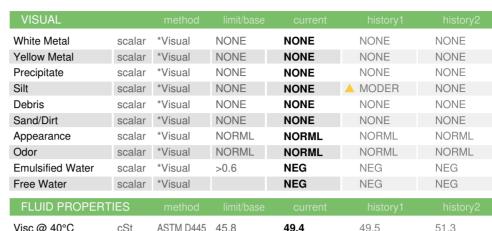


1100 @ 10 0	001	7.01111.10	10.0	 10.0	01.0
SAMPLE IMAGES		method			history2

Color





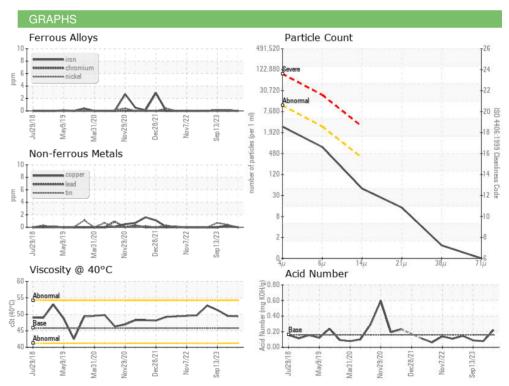





Certificate 12367

Laboratory Sample No.

Lab Number : 06160381 Unique Number : 10995804

: USPM6160381

Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Apr 2024 **Tested** : 26 Apr 2024

Diagnosed : 29 Apr 2024 - Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

2223 COUNTY RD I CRETE, NE US 68333

SMITHFIELD - CRETE

Contact:

T:

F: