


OIL ANALYSIS REPORT

Sample Rating Trend

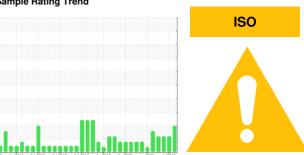

Machine Id

FRICK RXF2 (S/N 50572RFMFTHAC03)

Refrigeration Compressor

USPI 1009-68 SC (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


nZ013 JanZ014 FebZ015 FebZ016 FebZ017 AprZ018 AprZ020 JanZ022 JuZ023							
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		USP0006595	USP242683	USP245696	
Sample Date		Client Info		21 Apr 2024	24 Jul 2023	13 Apr 2023	
Machine Age	hrs	Client Info		120611	118439	115299	
Oil Age	hrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>8	<1	<1	2	
Chromium	ppm	ASTM D5185m	>2	0	0	0	
Nickel	ppm	ASTM D5185m		0	0	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	0	0	
Lead	ppm	ASTM D5185m	>2	0	0	0	
Copper	ppm	ASTM D5185m	>8	0	0	0	
Tin	ppm	ASTM D5185m	>4	0	0	0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	0	
Manganese	ppm	ASTM D5185m		0	0	<1	
Magnesium	ppm	ASTM D5185m		0	0	1	
Calcium	ppm	ASTM D5185m		0	0	0	
Phosphorus	ppm	ASTM D5185m		1	0	0	
Zinc	ppm	ASTM D5185m		0	0	0	
Sulfur	ppm	ASTM D5185m	50	14	0	13	
CONTAMINANTS		method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<1	<1	0	
Sodium	ppm	ASTM D5185m	710	<1	<1	<1	
Potassium	ppm	ASTM D5185m	>20	<1	<1	0	
Water	%	ASTM D6304	>0.01	0.002	0.001	0.010	
ppm Water	ppm	ASTM D6304	>100	22	7.4	107.1	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>10000	△ 67527	<u>44734</u>	△ 35645	
Particles >6µm		ASTM D7647	>2500	^ 20983	<u>▲</u> 8137	<u></u>	
Particles >14μm		ASTM D7647	>320	1324	269	270	
Particles >21µm		ASTM D7647		<u>^</u> 287	47	58	
Particles >38µm		ASTM D7647	>20	7	0	1	
Particles >71µm		ASTM D7647		0	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>^</u> 23/22/18	△ 23/20/15	<u>△</u> 22/20/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.015	0.014	
` '							





OIL ANALYSIS REPORT

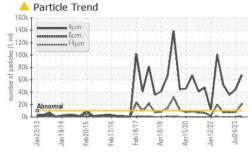










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2

Visc @ 40°C	cSt	ASTM D445	67	67.2	65.7	67.2
SAMPLE IMAGE	ES	method	limit/base	current	history1	history2

Color





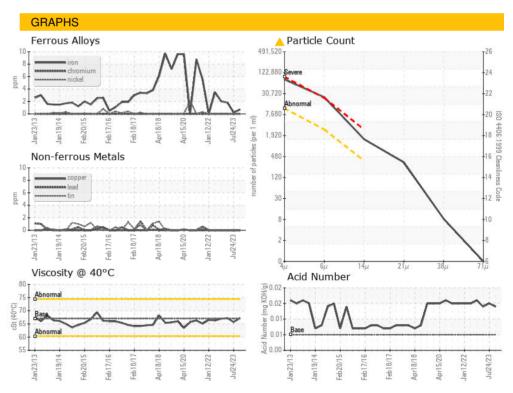





Certificate 12367

Laboratory

Sample No.

Test Package : IND 2

: USP0006595 Lab Number : 06160388 Unique Number : 10995811

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Apr 2024 **Tested** : 26 Apr 2024

Diagnosed

: 29 Apr 2024 - Doug Bogart

MODESTO, CA US Contact: SERVICE MANAGER

DOT FOODS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: DOTMOD [WUSCAR] 06160388 (Generated: 05/04/2024 04:17:01) Rev: 1

Contact/Location: SERVICE MANAGER - DOTMOD

T:

F: