


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

FES 2512825

Refrigeration Compressor

USPI 1009-68 SC (110 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		32012 Jan2014	Feb2015 Nov2016 Nov2011	3 Aug2019 Aug2020 Jun2021 Jul202	2 Sep2023	
SAMPLE INFORM	MOITAN	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0006510	USP0005134	USP0002060
Sample Date		Client Info		24 Apr 2024	04 Jan 2024	13 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	2	<1
Chromium	ppm	ASTM D5185m	>2	0	<1	<1
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	<1	0
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	<1	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		<1	0	<1
Calcium	ppm	ASTM D5185m		<1	<1	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	27	0	27
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	3	4	3
Sodium	ppm	ASTM D5185m		<1	0	1
Potassium	ppm	ASTM D5185m	>20	<1	<1	3
Water	%	ASTM D6304	>0.01	0.006	0.006	0.002
ppm Water	ppm	ASTM D6304	>100	62	60	18.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2785	13077	13744
Particles >6µm		ASTM D7647	>2500	507	2944	2293
Particles >14µm		ASTM D7647	>320	28	62	48
Particles >21µm		ASTM D7647	>80	6	9	8
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/16/12	21/19/13	21/18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015





OIL ANALYSIS REPORT












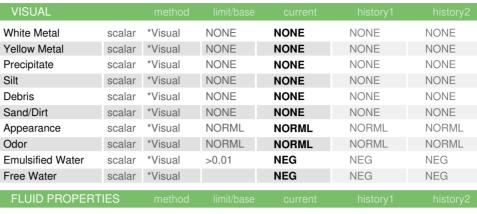


Visc @ 40°C	cSt	ASTM D445	67	64.5	63.5	64.1

SAMPL	_E IM	IAGE:	S	

Color

Bottom

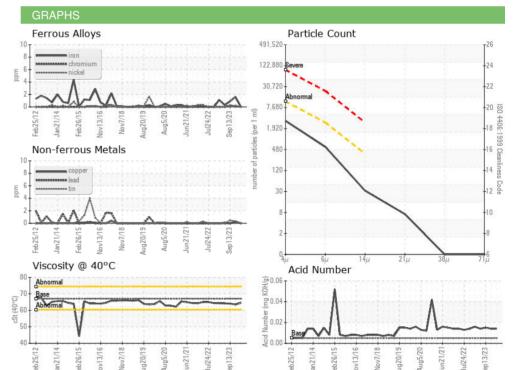





Certificate 12367

Laboratory Sample No.

: USP0006510 Lab Number : 06160407 Unique Number : 10995830 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received : 25 Apr 2024 **Tested** : 26 Apr 2024 Diagnosed : 29 Apr 2024 - Doug Bogart **FARMLAND FOODS - CRETE**

S HIGHWAY 103 CRETE, NE US 68333 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: