

OIL ANALYSIS REPORT

NORMAL

Machine Id FES 2552794 Component Refrigeration Compressor Fluid USPI 1009-68 SC (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORMATION method USP0006515 USP0000075 USP0005140 Sample Number **Client Info** Sample Date Client Info 24 Apr 2024 04 Jan 2024 13 Sep 2023 0 Machine Age hrs **Client Info** 0 0 Oil Age hrs Client Info 0 0 0 Oil Changed N/A N/A N/A **Client Info** NORMAL Sample Status NORMAL ATTENTION WEAR METALS 0 0 0 Iron ppm ASTM D5185m >8 Chromium ASTM D5185m >2 0 ppm <1 <1 Nickel ppm ASTM D5185m 0 <1 <1 Titanium ASTM D5185m 0 <1 <1 ppm 0 0 Silver ppm ASTM D5185m >2 0 Aluminum ASTM D5185m >3 0 0 ppm <1 Lead ASTM D5185m >2 0 0 ppm <1 ASTM D5185m 0 Copper >8 <1 0 ppm Tin ppm ASTM D5185m >4 0 <1 <1 Vanadium ASTM D5185m 0 0 ppm <1 Cadmium ppm ASTM D5185m 0 <1 <1 0 0 0 Boron ppm ASTM D5185m Barium ppm ASTM D5185m 0 0 0 0 Molybdenum <1 0 ppm ASTM D5185m 0 Manganese ppm ASTM D5185m <1 <1 0 0 Magnesium ASTM D5185m ppm <1 Calcium ppm ASTM D5185m <1 1 <1 Phosphorus ppm ASTM D5185m 0 0 0 Zinc ASTM D5185m 0 0 0 ppm 50 0 Sulfur ASTM D5185m 6 ppm 10 CONTAMINANTS Silicon ppm ASTM D5185m >15 1 <1 2 0 Sodium ppm ASTM D5185m <1 1 Potassium ASTM D5185m >20 3 ppm <1 <1 0.002 0.002 Water % ASTM D6304 >0.01 0.001 24 19 ppm Water ppm ASTM D6304 >100 0.00 >10000 Particles >4µm ASTM D7647 4103 7216 13561 >2500 748 Particles >6µm ASTM D7647 1565 2644 Particles >14µm ASTM D7647 >320 26 37 41 Particles >21µm ASTM D7647 >80 6 5 7 Particles >38µm ASTM D7647 >20 0 0 0 Particles >71µm ASTM D7647 0 0 0 >4

Acid Number (AN)

FLUID DEGRADATION

Oil Cleanliness

mg KOH/g ASTM D974

ISO 4406 (c)

>20/18/15

0.005

19/17/12

0.014

21/19/13


0.016


20/18/12


0.014





OIL ANALYSIS REPORT

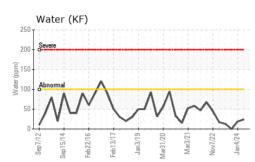

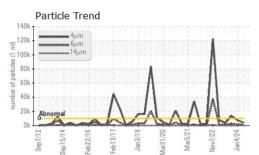








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67	65.7	64.8	65.5
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				•		
Bottom					(\bigcirc)	

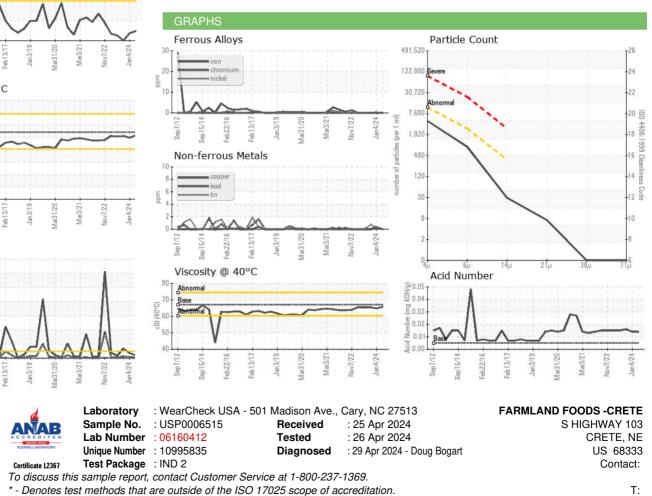

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: FARCRE [WUSCAR] 06160412 (Generated: 05/04/2024 04:21:43) Rev: 1

Contact/Location: - FARCRE Page 2 of 2

F: